SERVICE MANUAL

MODEL	DEST.	CHASSIS NO.	MODEL	DEST.	CHASSIS NO.
PVM-20M2U	US Canadian	SCC-G61H-A	PVM-20M4E	AEP	SCC-G62E-A
PVM-20M4U	US Canadian	SCC-G61F-A	PVM-20M4A	Australian	SCC-N17C-A
PVM-20M2E	AEP	SCC-G62GA			

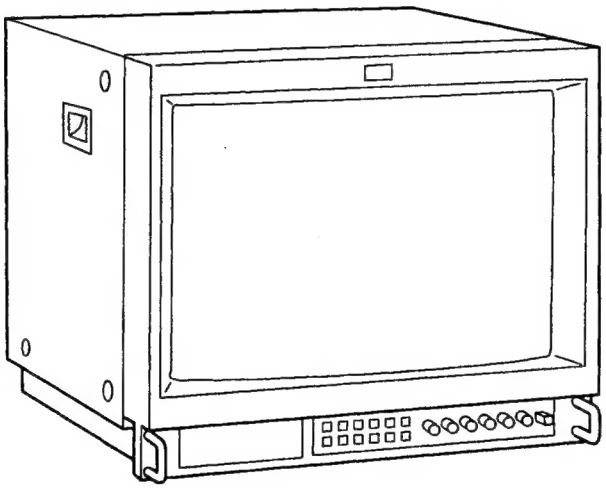

Trinitron
PVM-20M4U/20M4E

Trinitron
PVM-20M2U/20M2E

TRINITRON® COLOR VIDEO MONITOR

SONY

Video signal

For PVM-14M4U/14M4E/20M4U/20M4E:

Color system	NTSC, PAL, SECAM, NTSC4.43
Resolution	800 TV lines
Aperture correction	0 dB to +6 dB
Frequency response	
LINE	10 MHz ± 3 dB (Y signal)
RGB	10 MHz ± 3 dB
Synchronization	AFC time constant 1.0 msec.

For PVM-14M2U/14M2E/20M2U/20M2E:

Color system	NTSC, PAL, SECAM, NTSC4.43
Resolution	600 TV lines
Aperture correction	0 dB to +6 dB
Frequency response	
LINE	10 MHz ± 3 dB (Y signal)
RGB	10 MHz ± 3 dB
Synchronization	AFC time constant 1.0 msec.

Picture performance

For PVM-14M4U/14M4E/14M2U/14M2E:

Normal scan	7 % over scan of CRT effective screen area
Under scan	5 % underscan of CRT effective screen area
H. linearity	Less than 4.0 % (typical)
V. linearity	Less than 4.0 % (typical)
Convergence	
Central area:	0.4 mm (typical)
Peripheral area:	0.5 mm (typical)
Raster size stability	H: 1.0%, V: 1.5%
High voltage regulation	3.5 %
Color temperature	D65/D93, selectable USER (3,200K–10,000K, factory setting is D65)

For PVM-20M4U/20M4E:

Normal scan	7 % over scan of CRT effective screen area
Under scan	5 % underscan of CRT effective screen area
H. linearity	Less than 5.0 % (typical)
V. linearity	Less than 5.0 % (typical)
Convergence	
Central area:	0.5 mm (typical)
Peripheral area:	0.7 mm (typical)
Raster size stability	H: 1.0%, V: 1.5%
High voltage regulation	4.0 %
Color temperature	D65/D93, selectable USER (3,200K–10,000K, factory setting is D65)

For PVM-20M2U/20M2E

Normal scan	7 % over scan of CRT effective screen area
Under scan	5 % underscan of CRT effective screen area
H. linearity	Less than 5.0 % (typical)
V. linearity	Less than 5.0 % (typical)
Convergence	
Central area:	0.6 mm (typical)
Peripheral area:	1.0 mm (typical)
Raster size stability	H: 1.0%, V: 1.5%
High voltage regulation	4.0 %
Color temperature	D65/D93, selectable USER (3,200K–10,000K, factory setting is D65)

Inputs

For PVM-14M4U/14M4E/20M4U/20M4E:

LINE A/B

VIDEO IN	BNC connector (×2), 1Vp-p ±6 dB, sync negative Automatic 75 ohms termination
AUDIO IN	Phono jack (×2), –5 dBu[a)], more than 47 kilo-ohms

LINE C

Y/C IN	4-pin mini-DIN (×1) See the pin assignment on page 19.
AUDIO IN	Phono jack (×1), –5 dBu[a)], more than 47 kilo-ohms

RGB/COMPONENT

R/R-Y,G/Y,B/B-Y IN: BNC connector (×3)
R, G, B channels: 0.7 Vp-p, ±6 dB
Sync on green: 0.3 Vp-p, negative
R-Y, B-Y channels: 0.7 Vp-p, ±6 dB
Y channel: 0.7 Vp-p, ±6 dB
(Standard color bar signal of 75% chrominance)
Automatic 75 ohms termination

AUDIO IN	Phono jack (×1), –5 dBu[a)], more than 47 kilo-ohms
EXT SYNC IN	BNC connector (×1) 4 Vp-p, ±6 dB, sync negative
REMOTE	20-pin connector (×1) See the pin assignment on page 19.

a) 0 dBu = 0.775 Vr.m.s.

For PVM-14M2U/14M2E/20M2U/20M2E:

LINE A/B

VIDEO IN	BNC connector (x2), 1 Vp-p ± 6dB, sync negative Automatic 75 ohms termination
AUDIO IN	Phono jack (×2), –5 dBu[a)], more than 47 kilo-ohms

LINE C

Y/C IN	4-pin mini-DIN (×1) See the pin assignment on page 19.
AUDIO IN	Phono jack (×1), –5 dBu[a)], more than 47 kilo-ohms

RGB/COMPONENT

R/R-Y,G/Y,B/B-Y IN: BNC connector (×3)

R, G, B channels: 0.7 Vp-p ± 6dB
Sync on green: 0.3 Vp-p negative
R-Y, B-Y channel: 0.7 Vp-p ± 6dB
Y channel: 0.7 Vp-p ± 6dB
(Standard color bar signal of 75% chrominance)
Automatic 75 ohms termination

AUDIO IN	Phono jack (×1), –5 dBu[a)], more than 47 kilo-ohms
EXT SYNC IN	BNC connector (×1) 4 Vp-p, ±6 dB, sync negative
REMOTE	20-pin connector (×1) See the pin assignment on page 19.

a) 0 dBu = 0.775 Vr.m.s.

Outputs (common to all models)

LINE A/B

VIDEO OUT	BNC connector (×2) loop-through, Automatic 75 ohms termination
AUDIO OUT	Phono jack (×2) loop-through

LINE C

Y/C OUT	4-pin mini-DIN (×1) loop-through, Automatic 75 ohms termination
AUDIO OUT	Phono jack (×1) loop-through

RGB/COMPONENT

R/R-Y,G/Y,B/B-Y OUT: BNC connector (×3)
loop-through
Automatic 75 ohms termination

AUDIO OUT	Phono jack (×1) loop-through
EXT SYNC OUT	BNC connector (×1) Automatic 75 ohms termination
Speaker output	Output level: 0.8 W

General

For PVM-14M4U:

CRT	SMPTE-C phosphor
Power consumption	90 Wh (with SDI: 99 Wh)
Power requirements	120 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 346 × 340 × 431 mm (13⅝ × 13½ × 17 inches) not incl. projecting parts and controls
Mass	Approx. 16.7kg (36 lb 13 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-14M4E:

CRT	EBU phosphor
Power consumption	90 Wh (with SDI: 99 Wh)
Power requirements	100 to 240 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 346 × 340 × 431 mm (13⅝ × 13½ × 17 inches) not incl. projecting parts and controls
Mass	Approx. 16.7kg (36 lb 13 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-14M2U:

CRT	P-22 phosphor
Power consumption	90 Wh (with SDI: 99 Wh)
Power requirements	120 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 346 × 340 × 431 mm (13⅝ × 13½ × 17 inches) not incl. projecting parts and controls
Mass	Approx. 16.7kg (36 lb 13 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-14M2E:

CRT	P-22 phosphor
Power consumption	90 Wh (with SDI: 99 Wh)
Power requirements	100 to 240 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 346 × 340 × 431 mm (13⅝ × 13½ × 17 inches) not incl. projecting parts and controls
Mass	Approx. 16.7kg (36 lb 13 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-20M4U:

CRT	SMPTE-C phosphor
Power consumption	125 Wh (with SDI: 135 Wh)
Power requirements	120 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 450 × 458 × 503 mm (17¾ × 18⅛ × 19⅞ inches) not incl. projecting parts and controls
Mass	Approx. 30.0 kg (66 lb 2 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-20M4E:

CRT	EBU phosphor
Power consumption	130 Wh (with SDI: 140 Wh)
Power requirements	100 to 240 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 450 × 458 × 503 mm (17¾ × 18⅛ × 19⅞ inches) not incl. projecting parts and controls
Mass	Approx. 30.0 kg (66 lb 2 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-20M2U:

CRT	P-22 phosphor
Power consumption	115 Wh (with SDI: 125 Wh)
Power requirements	120 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 450 × 458 × 503 mm (17¾ × 18⅛ × 19⅞ inches) not incl. projecting parts and controls
Mass	Approx. 30.0 kg (66 lb 2 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

For PVM-20M2E:

CRT	P-22 phosphor
Power consumption	120 Wh (with SDI: 130 Wh)
Power requirements	100 to 240 V AC, 50/60Hz
Operating temperature	0 to +35°C (32 to 95°F)
Storage temperature	–10 to +40°C (14 to104°F)
Operating humidity	35 to 85% (no condensation)
Storage humidity	0 to 90%
Dimensions (w/h/d)	Approx. 450 × 458 × 503 mm (17¾ × 18⅛ × 19⅞ inches) not incl. projecting parts and controls
Mass	Approx. 30.0 kg (66 lb 2 oz)
Accessory supplied	AC power cord (1) AC plug holder (1) Tally label (1) Cable with a 20-pin connector (1)

Design and specifications are subject to change without notice.

Pin assignment

Y/C IN connector (4-pin mini-DIN)



Pin No.	Signal	Description
1	Y-input	1 Vp-p, sync negative, 75 ohms
2	CHROMA subcarrier-input	300m Vp-p, burst Delay time between Y and C: within 0 ± 100 nsec., 75 ohms
3	GND for Y-input	GND
4	GND for CHROMA-input	GND

REMOTE connector (20-pin)



Pin No.	Signal	Wire color
1	Blue only	Brown
2	H/V DELAY	Red
3	MAIN/SUB*	Orange
4	EXT SYNC	Yellow
5	DEGAUSS	Green
6	R ch ON/OFF*	Blue
7	TALLY	Purple
8	LINE B	Grey
9	GND	White
10	GND	Black
11	GND	Pink
12	GND	Light Blue
13	LINE A	Spiral Orange
14	LINE/RGB	Spiral Yellow
15	GND	Spiral Green
16	L ch ON/OFF*	Spiral Blue
17	REMOTE	Spiral Purple
18	LINE C	Spiral Grey
19	UNDER SCAN	Spiral Pink
20	16:9	Spiral Light Blue

(* For digital audio control)

How to connect a remote control unit

Connect No.17 pin to one of the GND pins (No.9 – 12, and 15), then connect pins for the functions you want to use to other GND pins (No.9 – 12, and 15).

How to light the tally lamp

Connect No.7 pin to one of the GND pins (No.9 – 12, and 15).

SAFETY CHECK-OUT
(US Model only)

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.

2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.

3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.

4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.

5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.

6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.

7. Check the B+ and HV to see if they are at the values specified. Make sure your instruments are accurate; be suspicious of your HV meter if sets always have low HV.

8. Check the metal trim, metallized knobs, screws, and all other exposed metal parts for AC leakage.
   Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5mA (500 microampers). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufactures' instructions to use these instruments.

2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.

3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

HOW TO FIND A GOOD EARTH GROUND

A cold-water pipe is guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth-ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms. If a cold-water pipe is not accessible, connect a 60-100 watts trouble light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side of the line, the lamp should light at normal brilliance if the screw is at ground potential. (See Fig. B)

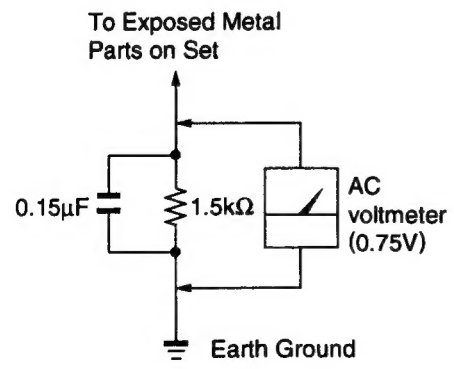

Fig. A. Using an AC voltmeter to check AC leakage.

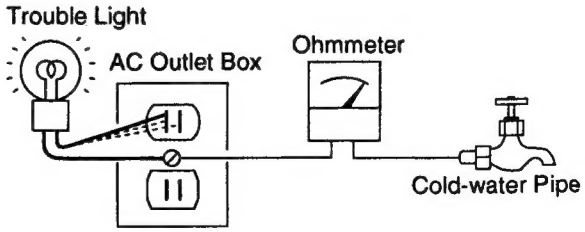

Fig. B. Checking for earth ground.

TABLE OF CONTENTS

Section	Title	Page
1. GENERAL		
	Features	8
	Location and Function of Parts and Controls	9
	Using On-screen Menus	11
	Connections	13
2. DISASSEMBLY		
2-1.	Top Cover and Rear Cover Removal	14
2-2.	Terminal Board Removal	14
2-3.	J and H Boards Removal	14
2-4.	Picture Tube Removal	14
2-5.	Service Position	15
3. SET-UP ADJUSTMENTS		
3-1.	Preparations (1)	16
3-2.	Preparations (2) Initialization	19
3-3.	Writing Model Data	19
3-4.	Picture Output	20
3-5.	Landing Adjustment	20
3-6.	Convergence Adjustment (1)	21
3-7.	Deflection Yoke Neck Rotation Adjustment	22
3-8.	Convergence Adjustment (2)	22
3-9.	G2 Adjustment	23
3-10.	White Balance Adjustment	23
3-11.	Blue-Only White Balance Adjustment	24
3-12.	Sub Brt Adjustment	24
3-13.	Focus Adjustment	24
4. SAFETY RELATED ADJUSTMENT		25
5. CIRCUIT ADJUSTMENTS		
5-1.	A Board Adjustments	27
6. DIAGRAMS		
6-1.	Block Diagrams (1)	39
	Block Diagrams (2)	44
6-2.	Frame Schematic Diagram	49
6-3.	Circuit Boards Location	52
6-4.	Printed Wiring Boards and Schematic Diagrams	52
	• A Board (1/3)	59
	• A Board (2/3)	66
	• A Board (3/3)	69
	• Q Board	74
	• G Board	76
	• J Board	76
	• X Board	76
	• H Board	78
	• S Board	78
	• C Board	83
6-5.	Semiconductors	87
7. EXPLODED VIEWS		
7-1.	Chassis	89
7-2.	Picture Tube	90
8. ELECTRICAL PARTS LIST		91

(CAUTION)

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.
THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

(ATTENTION)

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURT-CIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

ATTENTION!!

AFIN D'EVITER TOUT RESQUE D'ELECTROCUTION PROVENANT D'UN CHÁSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DÉPANNAGE. LE CHÁSSIS DE CE RÉCEPTEUR EST DIRECTEMENT RACCORDÉ À L'ALIMENTATION SECTEUR.

ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÈS PAR UNE TRAME ET PAR UNE MARQUE ⚠ SUR LES SCHÉMAS DE PRINCIPE, LES VUES EXPLOSÉES ET LES LISTES DE PIECES SONT D'UNE IMPORTANCE CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMÉRO DE PIÉCE EST INDIQUÉ DANS LE PRÉSENT MANUEL OU DANS DES SUPPLÉMENTS PUBLIÉS PAR SONY. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIES DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.

SECTION 1
GENERAL

The operating instructions mentioned here are partial abstracts from the Operating Instruction Manual. The page numbers of the Operating Instruction Manual remain as in the manual.

Features

Picture

HR (High Resolution) Trinitron [1] picture tube for PVM-14M4U/14M4E/20M4U/20M4E
HR Trinitron tube provides a high resolution picture. Horizontal resolution is more than 800 TV lines at the center of the picture.

Trinitron[1] picture tube for PVM-14M2U/14M2E/20M2U/20M2E
Trinitron tube provides a high resolution picture. Horizontal resolution is more than 600 TV lines at the center of the picture.

Comb filter
When NTSC video signals are received, a comb filter activates to make more accurate Y/C separation. This contributes to less of a decrease in resolution, cross color and cross luminance phenomena.

Beam current feedback circuit
The built-in beam current feedback circuit assures stable white balance.

Four color system available
The monitor can display NTSC, PAL, SECAM and NTSC$_{4.43}$[2] signals. The appropriate color system is selected automatically.

Blue only mode
In the blue only mode, an apparent monochrome display is obtained with all three cathodes driven with a blue signal. This facilitates color saturation and phase adjustments and observation of VCR noise.

Input

Analog RGB/component input connectors
Analog RGB or component (Y, R-Y and B-Y) signals from video equipment can be input through these connectors.

Y/C input connectors
The video signal, split into the chrominance signal (C) and the luminance signal (Y), can be input through this connector, eliminating the interference between the two signals, which tends to occur in a composite video signal, ensuring video quality.

External sync input
When the EXT SYNC selector is in the on position, the monitor can be operated on the sync signal supplied from an external sync generator.

Automatic termination (connector with ⌇ mark only)
The input connector is terminated at 75 ohms inside when no cable is connected to the loop-through output connector. When a cable is connected to an output connector, the 75-ohm termination is automatically released.

Functions

Underscan mode
The signal normally scanned outside of the screen can be monitored in the underscan mode.

Note

When the monitor is in the underscan mode, the dark RGB scanning lines may appear on the top edge of the screen. These are caused by an internal test signal, rather than the input signal.

Horizontal/vertical delay mode
The horizontal and vertical sync signals can be checked simultaneously in the H/V delay mode.

Auto/manual degaussing
Degaussing of the screen can be performed automatically when the power is turned on, or manually by pressing the DEGAUSS button.

On-screen menus
You can set color temperature, CHROMA SET UP, and other settings by using the on-screen menus.

Five menu languages
You can select the menu language from among five languages on the menu.

EIA standard 19-inch rack mounting
By using an MB-502B mounting bracket (for a 14-inch monitor, not supplied) or SLR-103A slide rail (for a 20-inch monitor, not supplied), the monitor can be mounted in an EIA standard 19-inch rack.

For details on mounting, refer to the instruction manuals supplied with the mounting bracket kit or slide rail kit.

SDI (Serial Digital Interface) Kit
By using the following optional SDI Kits, the monitor can display SMPTE 259M 4:2:2 serial digital signal from a digital VCR. (ex. Sony 4:2:2 VCR)
- BKM-101C: Component SDI Kit (for video)
- BKM-102: Component SDI Kit (for audio)

Note

When the serial number of the BKM-101C you want to connect is less than 2,010,000, an optional connecting harness (part no. 1-900-230-35) will be required.

Serial Remote Interface Kit
By using the optional BKM-103 Serial Remote Interface Kit, the monitor can be controlled from personal computers via the RS-422A serial interface.

1) "Trinitron" is a registered trademark of Sony Corporation.
2) The NTSC$_{4.43}$ system refers to an NTSC color system in which the subcarrier frequency is modified to 4.43MHz. When an NTSC recorded video program is played back with a Trident (PAL/SECAM/NTSC$_{4.43}$) VTR, the NTSC$_{4.43}$ signal is output.

Location and Function of Parts and Controls

Front

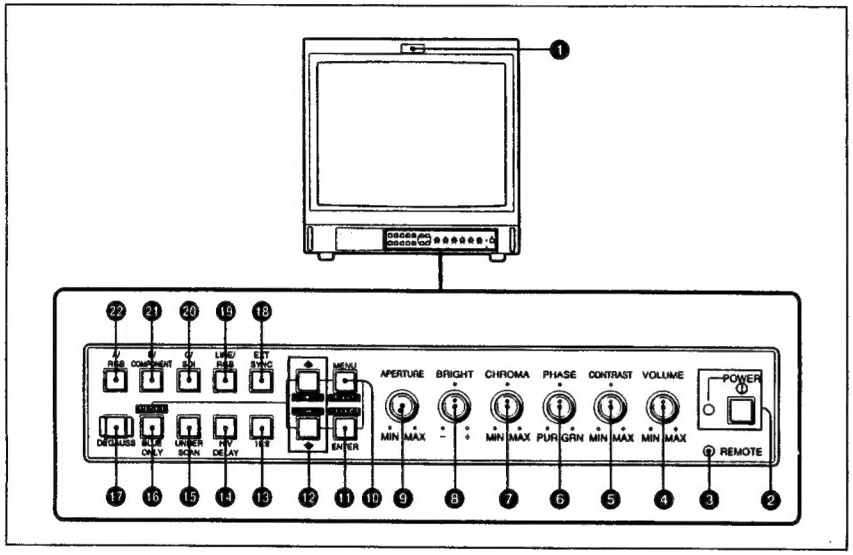

❶ Tally lamp
Lights up when the video camera connected to this monitor is selected, indicating that the picture is being recorded.

For details on how to light the tally lamp, see page 19.

❷ POWER switch and indicator
Depress to turn on the monitor. The indicator will light green.

❸ REMOTE indicator
Lights up when you select ON on the USER PRESET menu (see page 13), or when you connect a supplied cable to the REMOTE connector. The controls on the front panel do not work when this indicator lights up.

For details on how to connect the cable, see page 19.

❹ *VOLUME control*
Turn this control clockwise or counterclockwise to obtain the desired volume.

❺ CONTRAST control
Turn this control clockwise to make the contrast higher or counterclockwise to make it lower.

❻ PHASE control
This control is effective only for the NTSC and NTSC4.43 color systems. Turn it clockwise to make the skin tones greenish or counterclockwise to make them purplish.

❼ CHROMA control
Turn this control clockwise to increase the color intensity or counterclockwise to decrease it.

❽ BRIGHT (brightness) control
Turn this control clockwise to increase the brightness or counterclockwise to decrease it.

❾ *APERTURE control*
Turn this control clockwise to increase sharpness or counterclockwise to decrease sharpness.

Note

The PHASE (❻), CHROMA (❼) and APERTURE (❾) controls have no effect on the pictures of RGB signals.

❿ MENU (EXIT) button
Press this button to display the main menu.
When a menu is on the display, you can return to the previous menu by pressing this button.

⓫ ENTER (SELECT) button
Press the button to confirm a selected item on the menu.

⓬ ↑ (+)/ ↓ (–) buttons
Press the buttons to move the cursor (▶) or adjust selected item on the menu.

⓭ 16:9 selector
Press this selector (light on) to monitor the signals of 16:9 picture.

⓮ H/V DELAY selector
Press this selector (light on) to observe the horizontal and vertical sync signals at the same time.
The horizontal sync signal is displayed in the left quarter of the screen; the vertical sync signal is displayed near the center of the screen.

⓯ UNDER SCAN selector
Press this selector (light on) for underscanning.
The display size is reduced by approximately 5% so that four corners of the raster are visible.

⓰ BLUE ONLY selector
RESET button
- As the BLUE ONLY selector, press this selector (light on) to eliminate the red and green signals. Only blue signal is displayed as an apparent monochrome picture on the screen. This facilitates "chroma" and "phase" adjustments and observation of VCR noise.
("Phase" adjustment is effective only for the NTSC signals.)
- As the RESET button, you can reset the menu settings by pressing this button when a menu is on the display.

⓱ DEGAUSS button
Press this button momentarily. The screen will be demagnetized. Wait for 10 minutes or more before using this button again.

⓲ EXT SYNC (external sync) selector
- Set this selector to the off position (light off) to operate the monitor on the sync signal from the displayed video signal.
- Set this selector to the on position (light on) to operate the monitor on an external sync signal through the EXT SYNC connector.

⓳ LINE/RGB input selector
Press this selector to select the input to be monitored.
- Set this selector to the off position (light off) to monitor the signal through the LINE A, LINE B or LINE C connectors.
- Set this selector to the on position (light on) to monitor the signal through the RGB/COMPONENT connectors.

⓴ C/SDI selector
- When the LINE/RGB input selector is set to the LINE position (light off), press this selector (light on) to monitor the signal through the LINE C connectors.
- When the LINE/RGB input selector is set to the RGB position (light on), press this selector (light on) to monitor the SDI signal (optional kits are required).

㉑ B/COMPONENT selector
- When the LINE/RGB input selector is set to the LINE position (light off), press this selector (light on) to monitor the signal through the LINE B connectors.
- When the LINE/RGB input selector is set to the RGB position (light on), press this selector (light on) to monitor the component signal through the RGB/COMPONENT connectors.

㉒ A/RGB selector
- When the LINE/RGB input selector is set to the LINE position (light off), press this selector (light on) to monitor the signal through the LINE A connectors.
- When the LINE/RGB input selector is set to the RGB position (light on), press this selector (light on) to monitor the RGB signal through the RGB/COMPONENT connectors.

Rear Panel

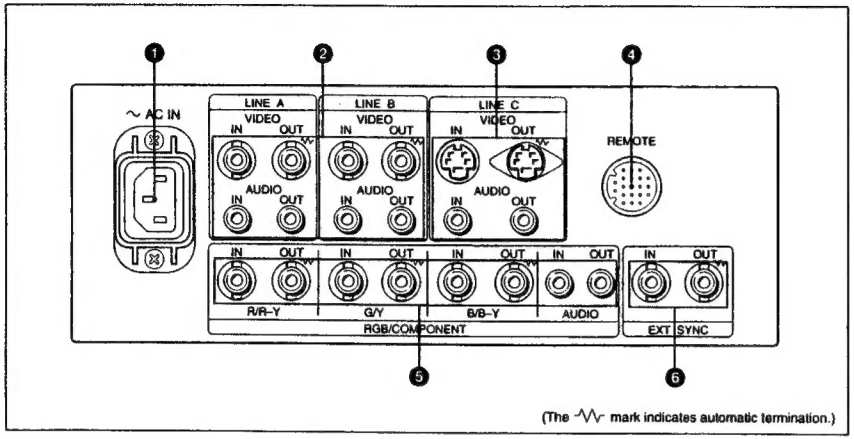

❶ AC IN socket
Connect the supplied AC power cord to this socket and to a wall outlet.

❷ LINE A, LINE B connectors
Two groups (A and B) of line input connectors for the composite video and audio signals and their loop-through output connectors.
To monitor the input signal through these connectors, set the LINE/RGB selector to the LINE position (light off) and press the A/RGB or B/COMPONENT selector (light on).

VIDEO IN (BNC)
Connect to the video output of video equipment, such as a VCR or a color video camera.
For a loop-through connection, connect to the video output of another monitor.

VIDEO OUT (BNC)
Loop-through output of the VIDEO IN connector. Connect to the video input of a VCR or another monitor.
When the cable is connected to this connector, the 75-ohm termination of the input is automatically released, and the signal input to the VIDEO IN connector is output from this connector.

AUDIO IN (phono jack)
Connect to the audio output of a VCR or to a microphone via a suitable microphone amplifier.
For a loop-through connection, connect to the audio output of another monitor.

AUDIO OUT (phono jack)
Loop-through output of the AUDIO IN connector. Connect to the audio input of a VCR or another monitor.

❸ LINE C connectors
Y/C IN (4-pin mini-DIN)
Connect to the Y/C separate output of a video camera, VCR or other video equipment.
For a loop-through connection, connect to the Y/C separate output of a VCR or another monitor.

Y/C OUT (4-pin mini-DIN)
Loop-through output of the Y/C IN connector. Connect to the Y/C separate input of a VCR or another monitor.
When the cable is connected to this connector, the 75-ohm termination of the input is automatically released, and the signal input to the Y/C IN connector is output from this connector.

AUDIO IN (phono jack)
Connect to the audio output of a VCR or a microphone (via a suitable microphone amplifier).

AUDIO OUT (phono jack)
Loop-through output of the AUDIO IN connector. Connect to the audio input of a VCR or another monitor.

❹ REMOTE connector (20-pin)
Connect to the tally output of a control console, special-effect generator, etc. The tally lamp on the front panel will be turned on and off by the connected equipment. This connector can also be used for connecting a remote control unit.

For details on the pin assignment of this connector, see page 19.

❺ RGB/COMPONENT connectors
RGB signal or component signal input connectors and their loop-through output connectors.
To monitor the input signal through these connectors, set the LINE/RGB selector to the RGB position (light on), and press the A/RGB or B/COMPONENT selector (light on).

R/R-Y IN, G/Y IN, B/B-Y IN (BNC)
When the EXT SYNC selector is set to the off position (light off), the monitor operates on the sync signal from the G/Y channel.

To monitor the RGB signal
Connect to the analog RGB signal outputs of a video camera, etc.

To monitor the component signal
Connect to the R-Y/Y/B-Y component signal outputs of a Sony Betacam video camera, etc.

R/R-Y OUT, G/Y OUT, B/B-Y OUT (BNC)
Loop-through outputs of the R/R-Y IN, G/Y IN, B/B-Y IN connectors.
When the cables are connected to these connectors, the 75-ohm termination of the inputs is automatically released, and the signal inputs to the R/R-Y IN, G/Y IN, B/B-Y IN connectors are output from these connectors.

To output the RGB signal
Connect to the analog RGB signal inputs of a video printer or another monitor.

To output the component signal
Connect to the R-Y/Y/B-Y component signal inputs of a Betacam video recorder, etc.

AUDIO IN (phono jack)
Connect to the audio output of video equipment when the analog RGB or component signal is input.

AUDIO OUT (phono jack)
Loop-through outputs of the AUDIO IN connector.

❻ EXT SYNC (external sync) connectors
Press the EXT SYNC selector (light on) to use the sync signal through this connector.

IN (BNC)
When this monitor operates on an external sync signal, connect the reference signal from a sync generator to this connector.

OUT (BNC)
Loop-through output of the IN connector. Connect to the external sync input of video equipment to be synchronized with this monitor.
When the cable is connected to this connector, the 75-ohm termination of the input is automatically released, and the signal input to the IN connector is output from this connector.

Using On-Screen Menus

You can make various settings and adjustments of the monitor using the on-screen menus.

On-Screen Menu Configuration

On-screen menu tree-chart

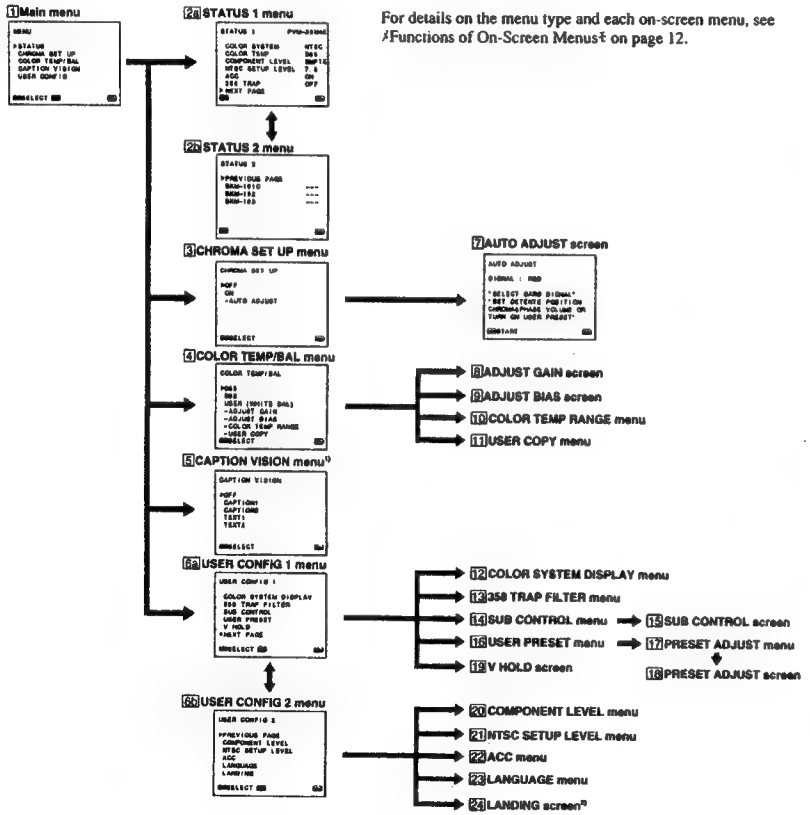

For details on the menu type and each on-screen menu, see ⁄Functions of On-Screen Menus‡ on page 12.

Operation through On-Screen Menus

Menu operation buttons

There are five menu operation buttons on the front panel of the monitor.

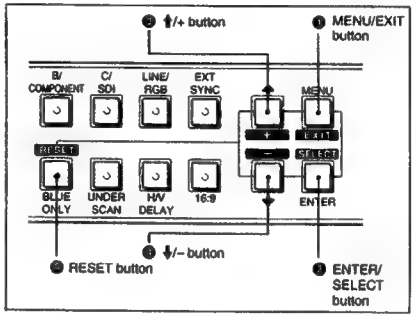

The following table shows how these five buttons function when using the menus.

Button	To select menu item To adjust the item selected
❶ MENU / EXIT	return to the previous menu return to the previous menu
❹ ENTER / SELECT	decide a selected item select an adjustment item
❷ ↑	move the cursor (▶) upwards increase selected value
❸ ↓	move the cursor (▶) downwards decrease selected value
❺ RESET	reset current settings to the factory setting

The buttons that can be used on the menus and adjustment screens are displayed at the bottom of the screen. You can perform menu operation using the displayed buttons.

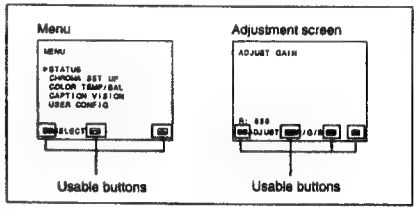

Display of the usable menu operation buttons

Operating procedures

To display the menu, follow this procedure.

1 Press the MENU/EXIT (❶) button.

MENU ([1] : main menu) appears.

2 Move the cursor (▶) to the desired setting menu by pressing the ↓/– or ↑/+ (❹, ❸) button.

3 Press the ENTER/SELECT (❷) button.

The setting menu selected in step 2 appears.

4 Move the cursor (▶) to the desired item by pressing the ↓/– or ↑/+ (❹, ❸) button.

5 Press the ENTER/SELECT (❷) button.

The adjustment screen or setting menu selected in step 4 appears.

For detailed information of menus, see ⁄Functions of On-Screen Menus‡ on page 12.

1) [5] CAPTION VISION menu is provided with PVM-14M4U/14M2U/20M4U/20M2U only.
2) [24] LANDING screen is provided with PVM-20M4U/20M4E only.

To display the next (or previous) page of the menus

Select NEXT PAGE on the menu to display the next page and PREVIOUS PAGE on the menu to display the previous page.

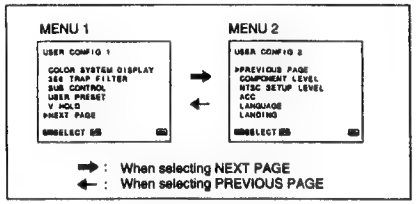

How to display the next or the previous page

To close the menu (to return to the regular screen)

Each time you press the MENU/EXIT (❶) button, the on-screen menu returns to the one previously displayed. Press the MENU/EXIT (❶) button repeatedly until the regular screen appears.

For PVM-14M4E/14M2E/20M4E/20M2E:

For the first time when the monitor is turned on, the LANGUAGE menu (23) will appear on the screen. So, select the language you want to use.

1 Move the cursor (▶) to the desired language by pressing the ⬇/– or ⬆/+ (❹, ❸) button.

2 Press the MENU/EXIT (❶) button.

Note

Unless you press the MENU/EXIT (❶) button in the procedure above, the LANGUAGE menu will always appear whenever you turn on the monitor.

Functions of On-Screen Menus

There are four types of on-screen menus.

Main menu
You can enter another menu such as status menu or setting menu.

Status menu
You can confirm the current settings.

Setting menu
You can select an item or enter an adjustment screen on this menu by using the ⬆/+, ⬇/– and ENTER/SELECT buttons.

Adjustment screen
You can make adjustments on this screen. The adjustments you made remain unchanged until next change even if you turn off the power.

([ ] indicates the factory setting.)

1 Main menu
Select another menu and press ENTER/SELECT to go to the menu.

2a STATUS 1 menu
Shows the current settings.

2b STATUS 2 menu
Shows what optional kit is installed in the monitor.

3 CHROMA SET UP menu
Select ON on this menu to activate "chroma" and "phase" (NTSC signal only) adjustments done on the AUTO ADJUST screen (7). [OFF]

4 COLOR TEMP/BAL menu
Select the color temperature from among D65, D93 and USER. USER is set to D65 as the factory setting. You can adjust or change the color temperature in USER mode (a measuring instrument is required). [D65]

5 CAPTION VISION menu
This menu is provided only for PVM-14M4U/14M2U/20M4U/20M2U.
The monitor can display the signal with Caption Vision. To display it, select the caption type in this menu. [OFF]

6a USER CONFIG 1 menu
Select an item to adjust on the menus and screens (12 through 19). To go to the USER CONFIG 2 menu, select NEXT PAGE.

6b USER CONFIG 2 menu
Select an item to adjust on the menus and screens (20 through 24). To go to the USER CONFIG 1 menu select PREVIOUS PAGE.

7 AUTO ADJUST screen
Select the color bar signal (full, SMPTE, EIA) and press ENTER/SELECT to start automatic "chroma" and "phase" (NTSC signal only) adjustments.
To activate these adjustments, select ON on the CHROMA SET UP menu (3).

8 ADJUST GAIN screen
Adjust GAIN in USER mode.

9 ADJUST BIAS screen
Adjust BIAS in USER mode.

10 COLOR TEMP RANGE menu
Select the color temperature range in USER mode. [5000K-10000K]

11 USER COPY menu
Store the factory setting of D65 or D93 as the value for USER mode.

12 COLOR SYSTEM DISPLAY menu
Select the color system type. When AUTO is selected, the color system type being used appears on the screen each time you change the signal input. [AUTO]

13 358 TRAP FILTER menu
Color spill or color noise may be eliminated if you select ON (NTSC signal only).
Normally select OFF. [OFF]

14 SUB CONTROL menu
Select an item (CONTRAST, BRIGHT, CHROMA and PHASE controls on the front panel) to finely adjust on the SUB CONTROL screen (15).

15 SUB CONTROL screen
Finely adjust the selected item on the SUB CONTROL menu (14). Each control (CONTRAST, BRIGHT, CHROMA and PHASE control) has a click position at the center of its adjustment range. You can adjust the setting of the click position with this feature.

16 USER PRESET menu
If you select ON on this menu, the REMOTE indicator lights up and the controls on the front panel do not work. The monitor operates with the user preset settings.
To adjust the user preset settings, select the PRESET ADJUST menu (17). [OFF]

17 PRESET ADJUST menu
You can preset the BRIGHT, CHROMA, PHASE, CONTRAST, VOLUME, and APERTURE controls to a desired level and can use these settings by selecting ON on the USER PRESET menu (16).

18 PRESET ADJUST screen
Adjust the selected item (BRIGHT, CHROMA, PHASE, CONTRAST, VOLUME, and APERTURE control) on the PRESET ADJUST menu (17).

19 V HOLD screen
Adjust the vertical hold if the picture rolls vertically. When you cannot read the display, select the input that is not connected.

20 COMPONENT LEVEL menu
Select the component level from among three modes.
N10/SMPTE for 100/0/100/0 signal
BETA 7.5 for 100/7.5/75/7.5 signal
BETA 0 for 100/0/75/0 signal
For PVM-14M4U/14M2U/20M4U/20M2U [BETA 7.5]
For PVM-14M4E/14M2E/20M4E/20M2E [N10/SMPTE]

21 NTSC SETUP LEVEL menu

Select the NTSC setup level from two modes.
The 7.5 setup level is mainly used in north America.
The 0 setup level is mainly used in Europe.
For PVM-14M4U/14M2U/20M4U/20M2U [7.5]
For PVM-14M4E/14M2E/20M4E/20M2E [0]

22 ACC menu

Set ACC (Auto Color Control) circuit on or off. When the fine adjustment is necessary, select OFF on the ACC menu.
Normally select ON. [ON]

23 LANGUAGE menu

You can select the menu language from among five languages (English, German, French, Italian, Spanish).
[ENGLISH]

24 LANDING screen

This menu is provided only for PVM-20M4U/20M4E.
If the color is not uniform even after you press the DEGAUSS button, you can adjust the landing so as to obtain color uniformity on this screen.
The following two methods are available to adjust the landing.
When the signals of the horizontal lines are input and displayed:
Press the ↓/– or ↑/+ button until the lines are displayed on the screen as horizontally as possible.
When the signals of the white color are input and displayed:
Press the ↓/– or ↑/+ button until the white color on the screen become as uniform as possible.

To reset the setting to standard (00), press the RESET button.

Connections

How to Connect the AC Power Cord

Connect the AC power cord (supplied) to the AC IN socket and to a wall outlet.

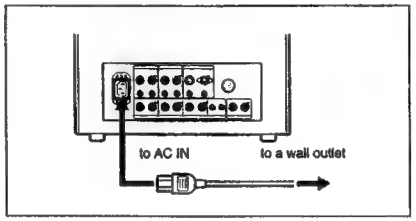

To connect an AC power cord securely with an AC plug holder

1

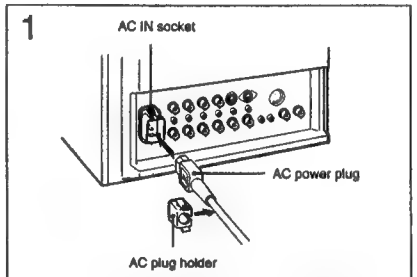

Plug the power cord into the AC IN socket. Then, attach the AC plug holder (supplied) on top of the AC power cord.

2

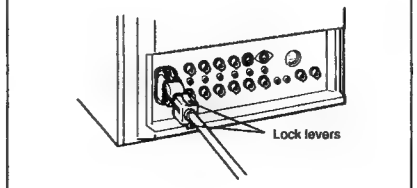

Slide the AC plug holder over the cord until it locks.

To remove the AC power cord

Pull out the AC plug holder while pressing the lock levers.

How to Connect a Cable to a BNC Connector

Connect a coaxial cable with the BNC plugs to the BNC connectors on the rear panel as illustrated below.

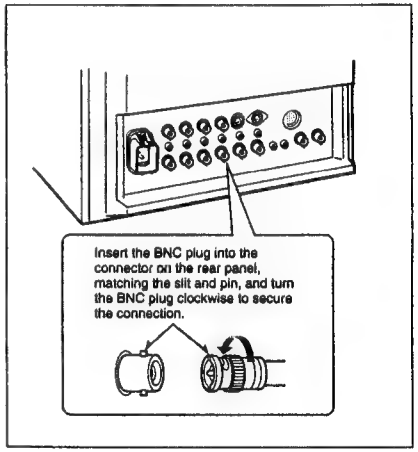

SECTION 2
DISASSEMBLY

2-1. TOP COVER AND REAR COVER REMOVAL

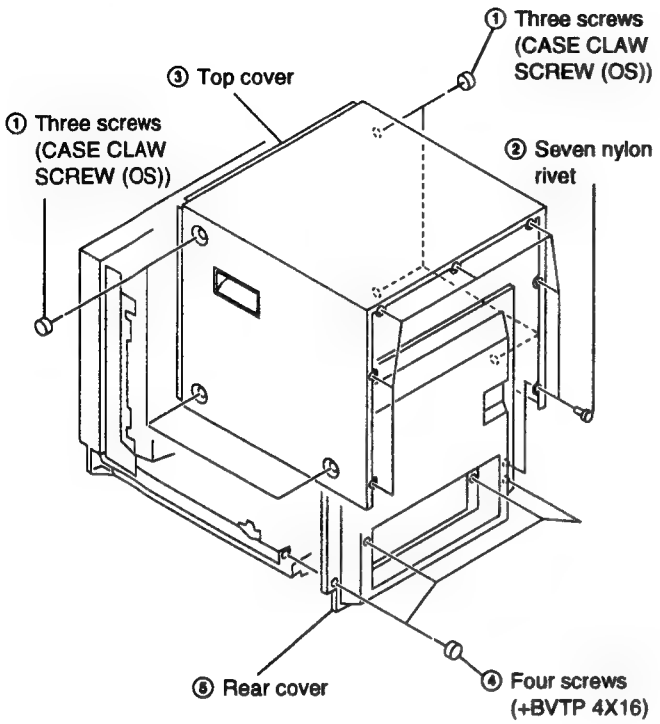

2-2. TERMINAL BOARD REMOVAL

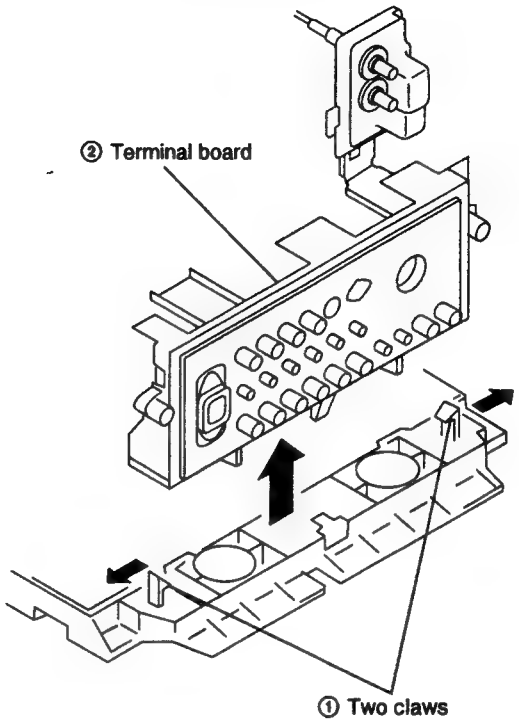

2-3. J AND H BOARDS REMOVAL

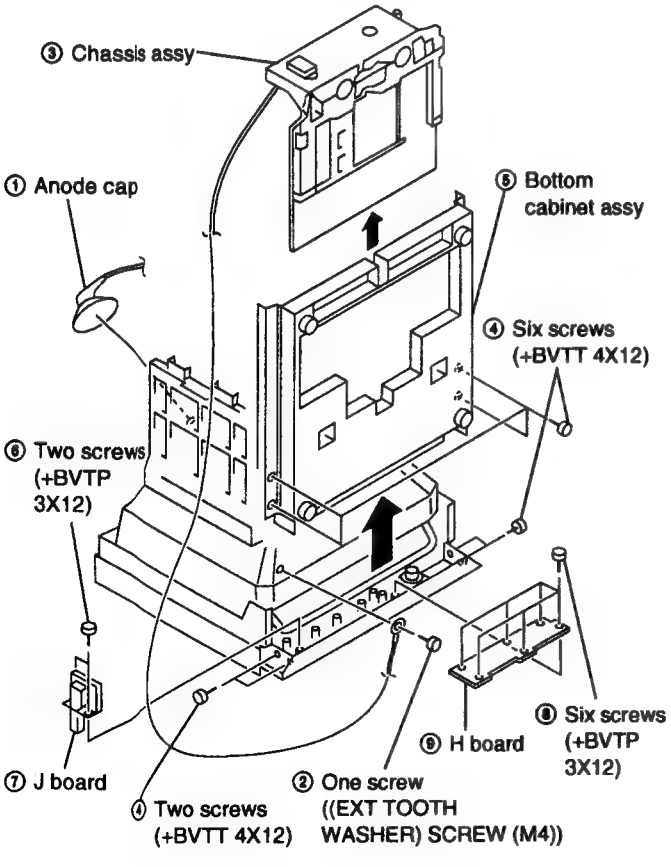

2-4. PICTURE TUBE REMOVAL

When exchange the Picture tube of PVM-20M4 series and if the magnet had stuck on the neck of the Picture tube, peel it.

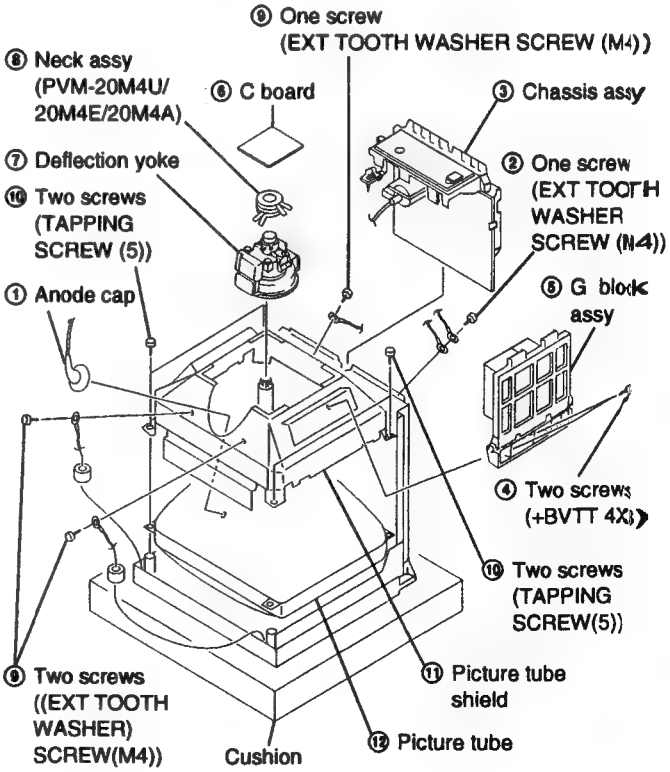

2-5. SERVICE POSITION

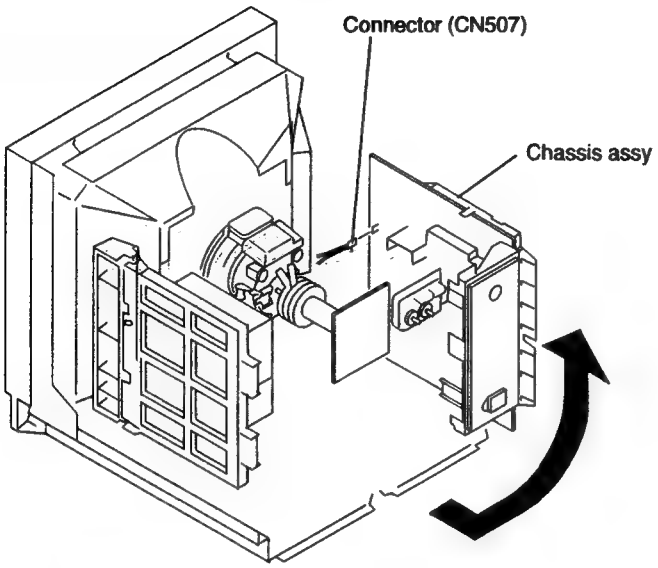

• REMOVAL OF ANODE-CAP

NOTE : Short circuit the anode of the picture tube and the anode cap to the metal chassis, CRT shield or carbon paint on the CRT, after removing the anode.

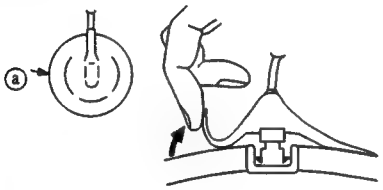

• REMOVING PROCEDURES

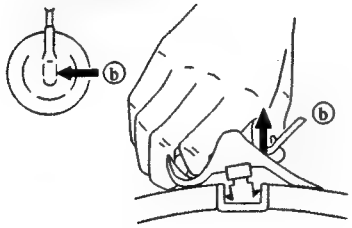

① Turn up one side of the rubber cap in the direction indicated by the arrow ⓒ.



② Using a thumb pull up the rubber cap firmly in the direction indicated by the arrow ⓑ.

③ When one side of the rubber cap is separated from the anode button, the anode-cap can be removed by turning up the rubber cap and pulling up it in the direction of the arrow ⓒ.

• HOW TO HANDLE AN ANODE-CAP

① Don't hurt the surface of anode-caps with sharp shaped material!

② Don't press the rubber hardly not to hurt inside of anode-caps! A material fitting called as shatter-hook terminal is built in the rubber.

③ Don't turn the foot of rubber over hardly! The shatter-hook terminal will stick out or hurt the rubber.



SECTION 3
SET-UP ADJUSTMENTS

3-1. PREPARATIONS (1)

Service Mode

This set is provided with a switch for service on the front panel that can be used to make various adjustments. The operation method of this switch is explained in detail below.

1. Entering the service mode

Simultaneously press the [ENTER] key and the [DEGAUSS] key shown on the display of the menu.

2. Service mode display

(1)	(5)	(4)	(3)	(6)
(2)				

Range of Service Mode Display

(1) The service items are largely classified into 16 types displayed by titles.
(2) The names of the service items or READ/WRITE guidance, etc., are displayed. The names are displayed to the left and the guidance to the right.
(3) This is the serial number for each of the service items. 1-120.
(4) This is the adjustment data for the service items that are now stored in the RAM. Adjustments can be made by changing these values, but as long as nothing is written to the ROM the adjustment values will be erased by turning off the power or by reading, so please be careful.
(5) When the adjustment data that is now displayed is identical with the data in the ROM, the cursor (►) is displayed.
(6) The present status is displayed.
[*]: Writing to the ROM. Make sure not to turn off the power while this display is on.
[?]: ROM reading error. In this case, an image is output with the standard adjustment data that the microcomputer itself possesses.
[¿]: Problem in the I2C bus.

3. Finishing the service mode

Simultaneously press the [ENTER] key and the [DEGAUSS] key shown on the display of the menu.

4. Easy ON/OFF of the service mode

If once entering the service mode after having turned on the power, easy ON/OFF is possible by once more pressing the A, B or C switch on the front panel (the LED lights) as long as the power is not turned off or as long as the service mode is not finished.

5. Change of position of the service mode display

If the switch is continuously pressed when turning on in the above easy mode, the display position moves in the V direction. This method is used when the display is outside of the effective screen area.

6. Change of service items

The items are returned with the [MENU] key and forwarded with the [ENTER] key. When a key is continuously pressed, the operation will be repeated.

7. Change of service data

The service data is made larger with the [↑] key and smaller with the [↓] key. When continuously pressing the keys, the operation will be repeated.

8. Reading of service data

When reading data from the ROM to the RAM, press the [B / O] key once and check than the READ display is shown in the guidance, and then press the [B/O] key once again. The adjustment data that is written will return to its previous state, so please be careful.

9. Writing of service data

When writing data from the RAM to the ROM, press the [DEGAUSS] key once and check that the WRITE display shown in the guidance, and then press the [DEGAUSS] key once again. Not only the displayed data will be written, but all data, so please be careful.

10. Carrying out FACTORY RESETTING

In case the adjustment data has been destroyed for some reason, and you keep pressing the [B/O] key at the beginning of the above reading, the READ guidance will change to FACTORY RESET guidance in approximately 3 seconds so that the factory resetting can be carried out. By once again pressing the [B/O] key after this, resetting will be carried out ([*] will be displayed as status) and factory resetting will be executed. However, in case the data available at the time of shipment from the factory has been destroyed, or if the ROM has been replaced, etc., or if factory setting mentioned later on has been carried out, factory resetting is executed.

11. Carrying out FACTORY SETTING

Make sure to make possible the above factory resetting by making a copy of the adjustment data when replacing the ROM. If you keep pressing the [DEGAUSS] key at the beginning of the above writing, the WRITE guidance will change into FACTORY RESET guidance after approximately 3 seconds. By once again pressing the [DEGAUSS] key after this, setting will be carried out ([*] will be displayed as status) and the data will be copied. By carrying out this operation, the selection items of the menu and the adjustment values will be reset to the standard conditions, so please be careful. If this operation is carried out once, it cannot be carried out again, but the FACTORY SET FLAG (No. 120) in the service mode can be set to 1.

SERVICE MAP

※ Signify (The setting is vary with the destination.)
Refer to the "Table 3-1 Table map (2)."

Table 3-1 Table map (1)

No.	SERVICE ITEM		MAX	STD	No.	SERVICE ITEM		MAX	STD
1	NOR 50 DEF	H FREQUENCY	255	85	61	C/T1 D??	BIAS <RED>	1023	376
2		VIDEO PHASE	255	139	62		BIAS <GREEN>	1023	512
3		V SIZE	255	139	63		BIAS <BLUE>	1023	396
4	NOR 60 DEF	H FREQUENCY	255	96	64		GAIN <RED>	1023	660
5		VIDEO PHASE	255	115	65		GAIN <GREEN>	1023	620
6		V SIZE	255	137	66		GAIN <BLUE>	1023	602
7	NOR DEF	V CENTER	255	103	67		B/O <RED>	255	115
8		H SIZE	255	108	68		B/O <GREEN>	255	115
9		PIN PHASE	255	128	69	C/T2 D??	3200K SW	1	0
10		PIN AMP	255	128	70		BIAS <RED>	1023	256
11		LOWER PIN AMP	255	128	71		BIAS <GREEN>	1023	512
12		UPPER PIN AMP	255	128	72		BIAS <BLUE>	1023	512
13		SEXY	255	128	73		GAIN <RED>	1023	602
14		V LINEARITY	255	120	74		GAIN <GREEN>	1023	700
15		V BOW	63	32	75		GAIN <BLUE>	1023	672
16		LOWER BOW	63	32	76		B/O <RED>	255	95
17		V ANGLE	63	32	77		B/O <GREEN>	255	108
18	U/S DEF	V SIZE <50>	255	100	78	W/B	SUB CON <4 :3,NORMAL>	255	178
19		V SIZE <60>	255	100	79		SUB CON <4 :3,H/V DELAY>	255	97
20		H SIZE	255	118	80		SUB CON <16 : 9,NORMAL>	255	150
21		PIN PHASE	255	128	81		SUB CON <16 :9,H/V DELAY>	255	78
22		PIN AMP	255	100	82		SUB BRIGHT	255	69
23	16 : 9 NOR DEF	V SIZE <50>	255	72	83		USER B/O <RED>	255	115
24		V SIZE <60>	255	60	84		USER B/O <GREEN>	255	115
25		PIN PHASE	255	135	85	OTHER	LANDING	255	64
26		PIN AMP	255	90	86		V HOLD	255	128
27	16 : 9 U/S DEF	V SIZE <50>	255	61	87		H BLANKING	255	73
28		V SIZE <60>	255	39	88		V BLANKING <50>	255	82
29		PIN PHASE	255	135	89		16 : 9 BLANKING START <50>	255	32
30		PIN AMP	255	65	90		16 : 9 BLANKING END <50>	255	176
31	COMPONENT	SUB PHASE	255	130	91		V BLANKING <60>	255	161
32		SUB CHROMA <NORMAL>	255	182	92		16 : 9 BLANKING START <50>	255	42
33		SUB CHROMA <SMPTE>	255	170	93		16 : 9 BLANKING END <50>	255	226
34		R-Y LEVEL	255	163	94		H DELAY	255	142
35	NTSC	BURST GATE PULSE WIDTH	255	52	95		V DELAY	255	104
36		CRYSTAL	255	59	96		HP POSITION	255	145
37		PHASE <NORMAL>	255	80	97		HP WIDTH <NORMAL>	255	148
38		PHASE <ACC OFF>	255	96	98		HP WIDTH <H/V DELAY>	255	62
39		B-Y PHASE	255	162	99	SYSTEM	SDI AUDIO	7	5
40		CHROMA <NORMAL>	255	98	100		358 TRAP FILTER	1	0
41		CHROMA <ACC OFF>	255	27	101		ACC	1	0
42		R-Y LEVEL	255	98	102		CAPTION VISION	7	0
43	NTSC 443	CRYSTAL	255	82	103		COMPONENT LEVEL	3	※
44		PHASE <NORMAL>	255	62	104		NTSC SETUP LEVEL	1	※
45		PHASE <ACC OFF>	255	64	105		CHROMA SET UP	1	0
46		B-Y PHASE	255	181	106		COLOR SYSTEM DISPLAY	3	0
47		CHROMA <NORMAL>	255	104	107		COLOR TEMPERATURE	3	0
48		CHROMA <ACC OFF>	255	36	108		USER PRESET	1	0
49		R-Y LEVEL	255	100	109		LANGUAGE	7	0
50	PAL	PHASE <NORMAL>	255	110	110		RGB SYNC	1	0
51		PHASE <ACC OFF>	255	105	111		OPTION BOARD	7	0
52		B-Y PHASE	255	122	112		AGING MODE	1	0
53		CHROMA <NORMAL>	255	109	113		PAL-M	1	0
54		CHROMA <ACC OFF>	255	41	114		MODEL	31	※
55		R-Y LEVEL	255	121	115		COLOR TEMP DISP 1	127	※
56	SECAM	CHROMA	255	93	116		COLOR TEMP DISP 2	127	※
57		R-Y LEVEL	255	181	117		REMOTE ADDRESS	63	0
58		COLOR BALANCE <R-Y>	255	118	118		RESERVED 1	1	0
59		COLOR BALANCE <B-Y>	225	135	119		RESERVED 2	2	0
60	C/T1 D??	3200K SW	1	0	120		FACTORY SET FLAG	1	0

Table 3-1 Table map (2)

Model Name	Component level	NTSC Set-up level	Model	Color temp disp 1	Color temp disp 2
PVM-20M4U	1	1	0	65	93
PVM-20M2U	1	1	1	65	93
PVM-20M4J	2	0	2	93	65
PVM-20M4E	2	0	3	65	93
PVM-20M2E	2	0	4	65	93
PVM-14M4U	1	1	5	65	93
PVM-14M2U	1	1	6	65	93
PVM-14M4J	2	0	7	93	65
PVM-14M1J	2	0	8	93	65
PVM-14M4E	2	0	9	65	93
PVM-14M2E	2	0	10	65	93
PVM-20M4A	2	0	11	65	93
PVM-14M4A	2	0	12	65	93
PVM-14M2A	2	0	13	65	93
PVM-14M4B	1	1	14	65	93
BVM-14M4DJ	2	0	15	93	65
BVM-14M4DE	2	0	16	65	93
PVM-20M4T	2	0	17	93	65
PVM-14M4T	1	0	18	93	65

3-2. Preparation (2). Initialization

* Supply composite video or component signals as shown in Table 3-2.

Table 3-2

Signal		Details of signal	Standard level P-W
Composite video	358NT 443NT	100% white	0.714V
		75% white	0.536V
	PALM PAL SECAM	100% white	0.7V
		75% white	0.525V
Component	BETA0	100% white Y	0.7V
		75% white Y	0.525V
		75%color B-Y, R-Y (P-P for this item only)	0.7V
	SMPTE	100% white Y	0.7V
		75% white Y	0.525V
		75%color B-Y, R-Y (P-P for this item only)	0.525V
Voice/sound		–5dBs	0.436Vrms

* Refer to Table 3-3 for groups of models.

Table 3-3

Group of models	Models		
1	PVM-14M4U PVM-14M4A	PVM-14M4J	PVM-14M4E
2	PVM-14M2U	PVM-14M2E	PVM-14M2A
3	PVM-14M1J		
4	PVM-20M4U PVM-20M4A	PVM-20M4J	PVM-20M4E
5	PVM-20M2U	PVM-20M2E	

* In this chapter, ☐ indicates the control items in the service mode.

Example: 60 H-FREQ

* Before turning off the power after adjustment in the service mode, write the adjustment data. When the power is turned off before writing, adjusted data will all be lost.

3-3. Writing model data

1. Write model data on respective models in the service mode at the location of No.114 MODEL in accordance with Table 3-4.

Table 3-4

Model	Model data
PVM-20M4U	0
PVM-20M2U	1
PVM-20M4J	2
PVM-20M4E	3
PVM-20M2E	4
PVM-14M4U	5
PVM-14M2U	6
PVM-14M4J	7
PVM-14M1J	8
PVM-14M4E	9
PVM-14M2E	10
PVM-20M4A	11
PVM-14M4A	12
PVM-14M2A	13

2. Write the following data in the service mode at the location of No.115 COLOR TEMP DISP 1.
   COLOR TEMP DISP 1
   U/C, AEP 65
   J 93

3. Write the following data in the service mode at the location of No.116 COLOR TEMP DISP 2.
   COLOR TEMP DISP 2
   U/C, AEP 93
   J 65

* Standard inspection state
  Unless otherwise specified in this manual, make adjustment under the following conditions:

APERTURE	MIN	(Turn FLAT fully counterclockwise.)
BRIGHT	50%	(Center click)
CHROMA	50%	(Center click)
PHASE	50%	(Center click)
CONTRAST	80%	(Center click)
VOLUME	50%	

3-4. Picture output

1. AC input voltage setting

1. Input VIDEO signals and AUDIO signals to respective terminals on the connector panel.
2. Set the sliduck AC voltage as shown in Table 3-5.

Table 3-5

Group of models		Voltage
PVM-14M4J(J) PVM-14M1J(J)	PVM-20M4J(J)	AC 100±3V (Distortion factor:3% max.)
PVM-14M4U(U/C) PVM-20M2U(U/C)	PVM-14M2U(U/C) PVM-20M4U(U/C)	AC 120±3V (Same as above)
PVM-14M4E(AEP) PVM-14M2A(AUS) PVM-20M4E(AEP) PVM-20M4A(AUS)	PVM-14M2E(AEP) PVM-14M4A(AUS) PVM-20M2E(AEP)	AC 220±3V (Same as above)

3-5. Landing adjustment

1. CONT ... MAX
   BRT ... Conspicuous position
2. Roughly adjust the white balance, G2, and convergence.
3. Switch the rotary SW of the single color switch to change the color into green only.
4. Adjust the purity knob so that the green will come to the center of the screen. Make R and B almost identical. (Fig. 3-1)
5. Switch to B only, R only, and G only and verify each. (Figs.3-1, 3-2, and 3-3)
6. Bring the deflection yoke gradually forward and adjust the deflection yoke so that R and B on both sides of the screen will be green. (Fig.3-2 → Fig. 3-3)
7. If the deflection yoke comes forward too much, the pattern shown in Fig.3-4 will appear. If so, move the deflection yoke backward. (Fig.3-4 → Fig.3-3)
8. Switch the single color switch to B and verify the single color. (Fig.3-6)
9. Switch the single color switch to R and verify the single color. (Fig.3-9)
10. When two colors are mixed, set the mixed color as the standard, and repeat operations 6 and 7.
11. Switch to an all-white signal and check the uniformity.
12. When the deflection yoke position is determined, fasten it with the fixture.



Fig.3-1

Fig.3-2 Fig.3-3 Fig.3-4

Fig.3-5 Fig.3-6 Fig.3-7

Fig.3-8 Fig.3-9 Fig.3-10

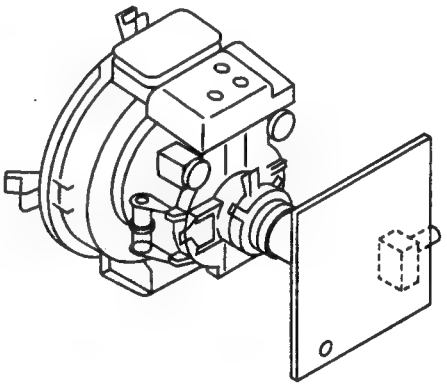
Fig.3-11

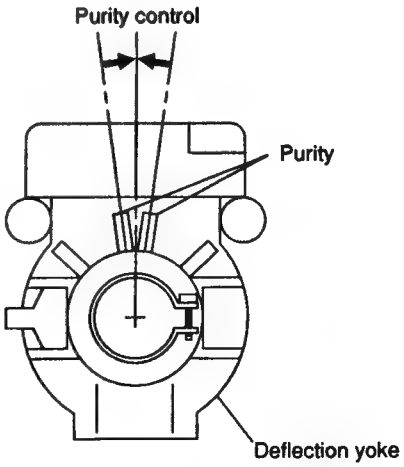

Fig.3-12

Note : Attach NTC magnets for 20M4 to the locations shown in Fig.3-13.

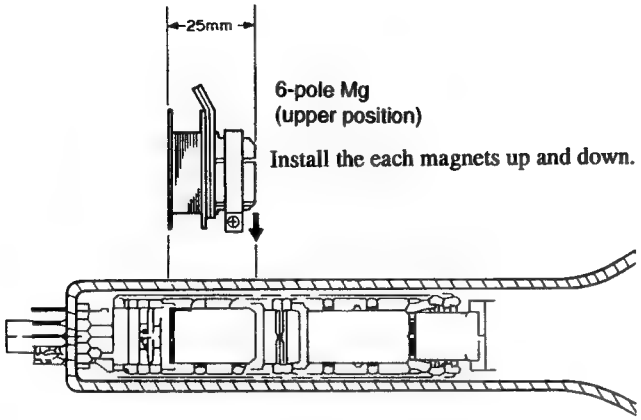

Fig. 3-13

3-6. Convergence adjustment (1)

1. Input a dot pattern signal.
   CONT ... Conspicuous position
   BRT ... MIN
2. Align the horizontal R, G, and B dots at the center of the screen with the H-START VR.

* When H-CENT is changed after H-STAT adjustment, readjust H-STAT. (H-STAT will change by means of H-CENT VR.)

3. Align the vertical location of R, G, and B in the center of the screen with the V-STAT Mg. (Fig.3-14, 3-15)

* After V-STAT adjustment, paint-lock the knob.

V-STAT Mg knob
While keeping the angles A and B equal (I = I'), align the vertical convergence.



Fig. 3-14 Good example

If the A and B knobs are not symmetrical (I ≠ I'), the focus may deteriorate, beam striking or other adverse effects may occur.



Fig. 3-15 Bad example

4. For HMC, use the BMC Mg to adjust the R and B dots so that they will be symmetrical horizontally with respect to the G dot.

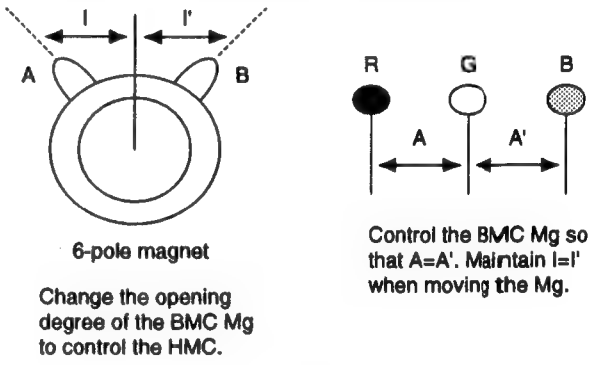

Fig. 3-16

5. For VMC, use the MBC Mg to adjust the R and B dots so that they will be symmetrical vertically with respect to the G dot.

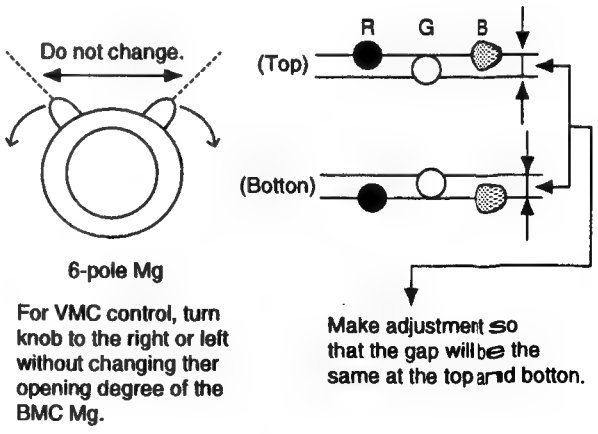

Fig. 3-17

6. Repeat adjustments 2. to 5.

* The above adjustment may affect the landing, so after adjustment, check the landing again.

7. Paint-lock the knobs after adjustment.

3-7. Deflection yoke neck rotation adjustment

1. If there is nonconvergence on both sides of the X or Y axis of the screen, turn the neck of the deflection yoke in the direction of the arrow to hold the nonconvergence for the entire CRT screen within the tolerance.

* Applicable only to groups of models 1, 2, 3, and 5.

(1) Reverse cross misconvergence pattern

Move the deflection yoke downward.



Fig. 3-18

(2) Regular cross misconvergence pattern

Move the deflection yoke upward.



Fig. 3-19

(3) Pattern of left-sided deflection yoke

Move the deficetion yoke to the right when viewed from the CRT screen.



Fig. 3-20

(4) Pattern of right-sided deflection yoke

Move the deflection yoke to the left when viewed from the CRT screen.



Fig. 3-21



Fig. 3-23

2. Turn the neck of the deflection yoke to align the V pin vertically.

* Applicable only to group of models 4.

3. Insert the wedge between the deflection yoke and CRT funnel to lock the deflection yoke. (Fig.3-24)

Groups of models 1,2,3,and 5 have been treated.

Group of models 4 have been treated.

Fig. 3-24

4. The following patterns cannot be corrected by turning the neck. (Figs.3-25, 3-26, and 3-27)



* Gun rotatuon

The X-axis and Y-axis beams are distorted on both sides.

Fig. 3-25



* HCR Large(Small)

The horizontal portion of the G raster is wider(narrower) than that of the RB raster on both sides of the screen.

Fig. 3-26



* VCR Large(Small)

The vertical portion of the G raster is wider(narrower) than that of the RB raster on both sides of the screen.

Fig. 3-27

3-8. Convergence adjustment (2)

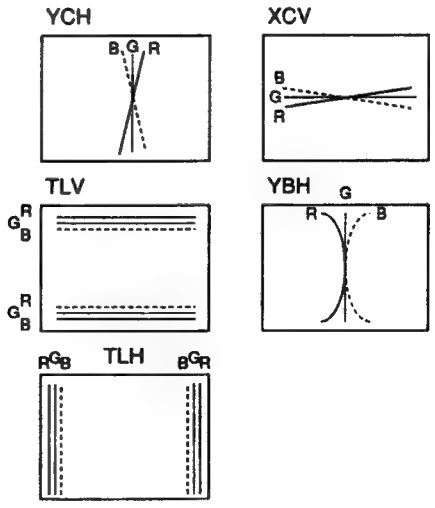

Fig. 3-28 Convergence compensation VR,coil,and compensator

Note : When adjustment is insufficient, use permalloy for perfect adjustment.

1. Group of models 4 (See Table 3-3.)

1. Input a cross-hatch signal.
2. Make adjustment with the TLV, YCH, YBH VR, and XCV coils of the deflection yoke to minimize nonconvergence.
3. When the nonconvergence of the TILT component is included in the horizontal convergence, make adjustment with the TLH compensator. (Fig.3-28)

2. Groups of models 1, 2, and 3 (See Table 3-3.)

1. Input a cross-hatch signal.
2. Make adjustment with the TLV, YCH VR, and XCV coils of the deflection yoke to minimize nonconvergence.
3. When the nonconvergence of the TILT component is included inthe horizontal convergence, insert the TLH compensator into the deflection yoke for adjustment. (Fig.3-28)

3. Group of models 5 (See Table 3-3.)

1. Input a cross-hatch signal.
2. Make adjustment with the XCV coil of the deflection yoke to minimize nonconvergence.
3. When the nonconvergence of the TILT component is included in the vertical convergence, insert the TLV compensator into the deflection yoke for adjustment. (Fig.3-28)

3-9. G2 adjustment

1. Input a 525 monoscope signal.
2. Connect the probe of the oscilloscope to TP403 on the A board.
3. Measure the lowest reference pulse of the three.
4. Make adjustment with SCREEN VR so that the left end of the waveform will be 1.35 V±0.05 V.

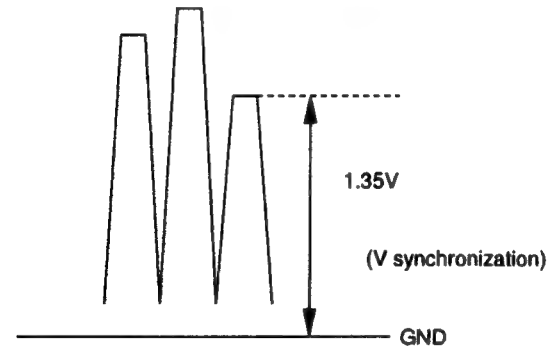

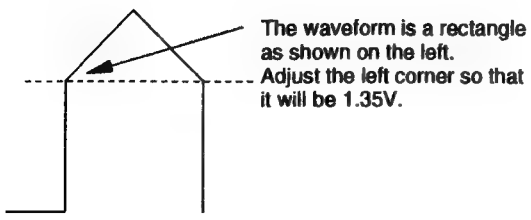

Fig. 3-29

3-10. White balance adjustment

1. Input a 525 monoscope signal. (Input from LINE A or B with no burst.)
2. Set as follows:
   CONT: 0%
   BRT: 50%
3. Adjust [SUB-BRIGHT] in the service mode so that the 20-tone gray scale will be as follows:
   0 and 5 IRE → Cut off
   10 IRE → Slight glow
4. Input 525 all-white (COMPOSITE signal without burst).
5. Set CONT VR to 80%.
6. Adjust the all-white luminance so that the screen luminance will be 3 NIT.
7. Press MENU and select COL TEMP/BAL.
8. Select 6500K.
   Set [3200K SW] to "0" for both 9300K and 6500K.
9. Put the unit into the service mode.
10. Adjust to the standard values with <RED> and <BLUE> of [C/T1 6500K BIAS] or [C/T2 6500K BIAS] .
    Set cut-off to 3 NIT.

<GREEN>

Group of models (Table 3-3)	Fix as follows:
2, 3, 5	"400"
1, 4	"512"

11. Switch the all-white signal luminance to 100 IRE.
12. Adjust to the standard values with <RED> and <BLUE> of [C/T1 6500K GAIN] or [C/T2 6500K GAIN] .
    <Green>
    Set it to "700."
13. Repeat adjustment (10, 11, and 12) until the adjustment is complete, and then write the adjustment data.
14. Press MENU and select COL TEMP/BAL.
15. Select 9300K.
16. Adjust [C/T2 9300K BIAS] [C/T2 9300K GAIN] or [C/T1 9300K BIAS] [C/T1 9300K GAIN] in the same manner as adjustments 1013.

BIAS <GREEN>

Group of models (Table 3-3)	Fix as follows:
2, 3, 5	"400"
1, 4	"512"

GAIN <GREEN>
Fix it at "700."

3-11. Blue-only white balance adjustment

1. Turn ON the blue-only of the user controller SW. (To set blue-only.)
2. Input all-white (COMPOSITE signal without burst).
   The all-white signal luminance shall be 100 IRE.
   CONT: 80%
   BRT: 50%
3. Select COL TEMP/BAL.
4. Select 6500K.
5. Adjust to the standard values with C/T1 6500K B/O<RED> and C/T1 6500K B/O<GREEN> or C/T2 6500K B/O<RED> and C/T1 6500K B/O<GREEN> .
6. Select COL TEMP/BAL.
7. Select 9300K.
8. Adjust to the standard values with C/T2 9300K B/O<RED> and C/T2 9300K B/O<GREEN> or C/T1 9300K B/O<RED> and C/T1 9300K B/O<GREEN> .
9. Adjust the all-white signal luminance, and check that the white balance is satisfactory when the luminance of the screen is 8NIT.

3-12. SUB BRT adjustment

1. Input a 525 monoscope signal.
2. CONT ... MIN
   BRT .... CENTER (50&)
3. Select SUB BRIGHT in the service mode.
4. Adjust SUB BRIGHT so that 10 IRE glows slightly and 0 IRE is cut off.

3-13. Focus adjustment

1. PVM-20M4 Series

1. Adjust the H focus (upper side of focus pack) by means of a dot signal.
2. Adjust the V focus (lower side of focus pack) by means of a dot signal.
3. Turn the H focus fully clockwise when viewed from the front by means of a dot signal.
4. Turn the H focus counterclockwise and focus well the dot in the center of the screen. When the dot is well focused, it will be divided into two sections.
5. Turn the H focus VR clockwise (returning direction) so that the dot will be as shown in Fig.3-30. At that time, both ends of the central section of the screen are in the same state.

Fig. 3-30

6. Check that the resolution is more than 800 lines by means of a digital monoscope signal.
7. Check that the magenta ring is unconspicuous by means of an all-white signal.



Fig.3-31 Movement of VR when viewed from the front

2. PVM-14M4 Series

1. Adjust the H focus (upper side of focus pack) by means of a dot signal.
2. Adjust the V focus (lower side of focus pack) by means of a dot signal.
3. Turn the H focus fully clockwise when viewed from the front by means of a dot signal.
4. Turn the H focus counterclockwise and focus the dot in the center of the screen well. The dot signal is divided into two sections at that time.
5. Turn the H focus VR counterclockwise so that the dost will be as shown in Fig.3-32. At that time, both ends of the central section of the screen are in the same state.

Fig. 3-32

6. Check that the resolution is more than 800 lines by means of a digital monoscope signal.
7. Check that the magenta ring is unconspicuous by means of an all-white signal.



Fig.3-33 Movement of VR when viewed from the front

3. PVM-14M2 Series (CRT14MG)

Make adjustment so that the dots in the central section (right and left edges) will be undivided, respectively. (When well-focused, the dot is divided into two sections.)

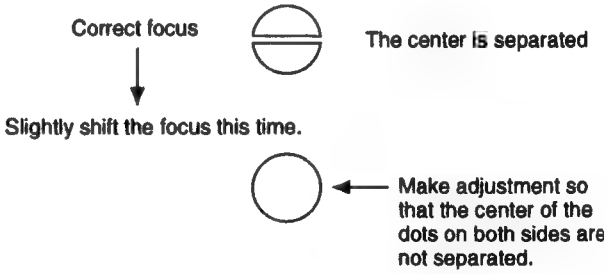



Fig. 3-34

4. PVM-20M2 Series

Focus the character "30" in the center of monoscope well as usualy.

SECTION 4
SAFETY RELATED ADJUSTMENT

When the parts (with a ⊠ ,◪ mark on the circuit diagram) shown below are replaced, confirm the matters described in items 4-1 and 4-2 shown below.

⊠ R1536
◪ R551, R506, R519, R518, R516, R515, R508, R517, R1560, R1537, C549, C512, C513, C523, C592, D501, D533, Q500, Q511, IC500, and IC507

When the following parts are replaced, check the +B voltage:
IC600, IC602, D610, C615, C631, C621, C632, and T603

Confirmation procedure

1. Input 120 VAC.
2. Input a monoscope signal, and minimize CONTRAST and BRIGHT.
3. Check that the voltage of the CN605 ④ pin is 115.7 VDC.

4-1. CONFIRAMATION OF +B MAXIMUM

Standard : Less than115.7 VDC(CN605 pin ④)
Check Condition Input voltage : 130 VAC
Note : Use NF Power Supply or make sure that distortion factor is 3% or less.
Input signal : Monoscope
Controls : BRT & CONT → Normal

4-2. CONFIRAMATION OF HOLD-DOWN CIRCUIT

Check Condition Input voltage : 130 VAC
Input signal : White &Dot
Controls : BRT & Cont → Max. & Min.

4-2-1.Hold-Down Circuit (+B)

a) Adjust the beam current to 600±50μA with the pin ④ of CN605 with the external DC power supply (less than 127.0 VDC)to the point just before the hold-down circuit works.
Input Signal : White
b) Adjust the beam current to 80±20μA with the pin ④ of CN605 with the external DC power supply (less than 127.0 VDC)to the point just before the hold-down circuit works.
Input Signal : Dot

4-2-2. Hold-Down Circuit (3rd Wire voltage of FBT)

Check item : Check of pin ⑪ of IC500 voltage : more than 110.0VDC
a) Adjust the beam current to 600±50μA with the pin ⑪ of IC500 with the external DC power supply (less than 141.0 VDC)to the point just before the hold-down circuit works.
Input Signal : White
b) Adjust the beam current to 80±20μA with the pin ⑪ of IC500 with the external DC power supply (less than 141.0 VDC)to the point just before the hold-down circuit works.
Input Signal : Dot

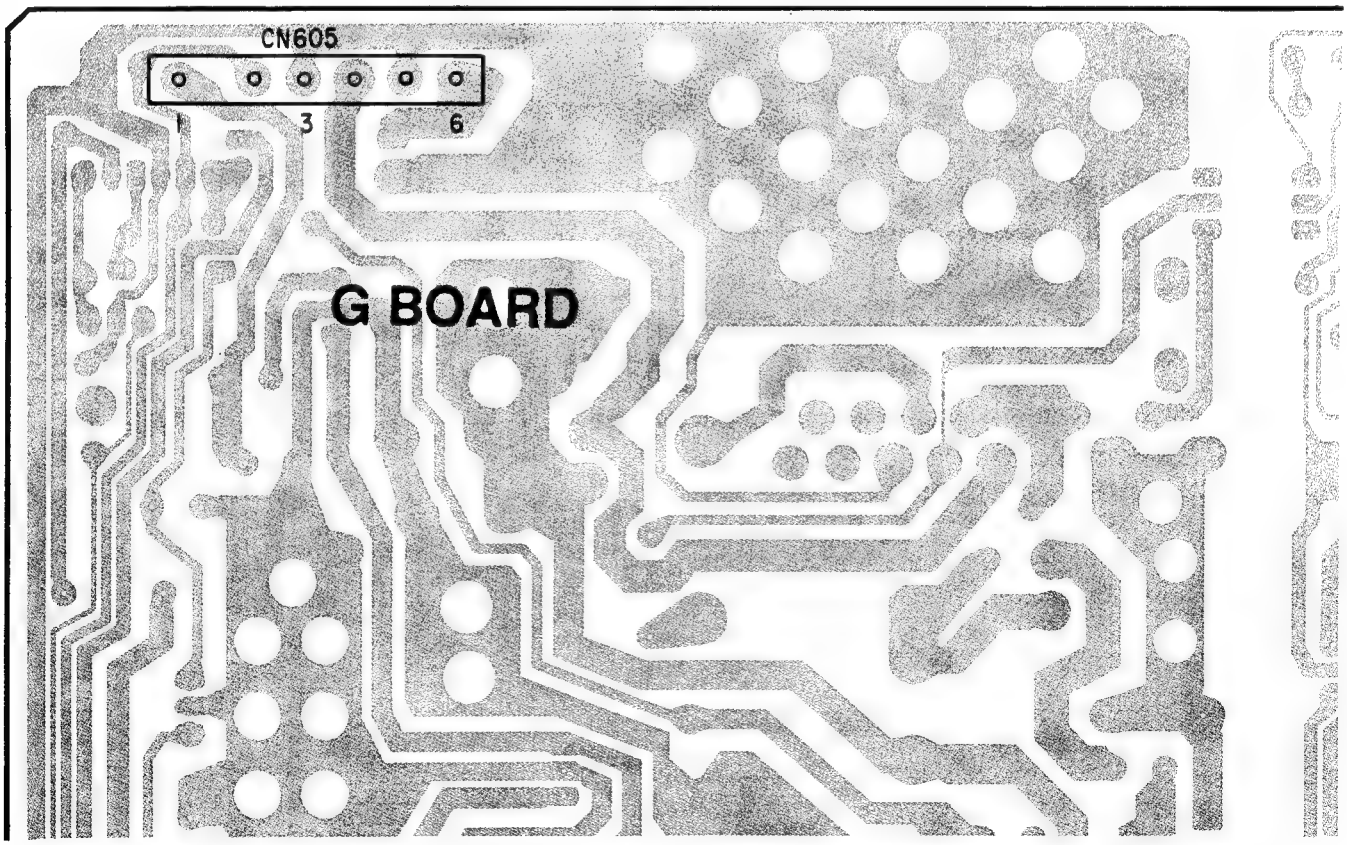

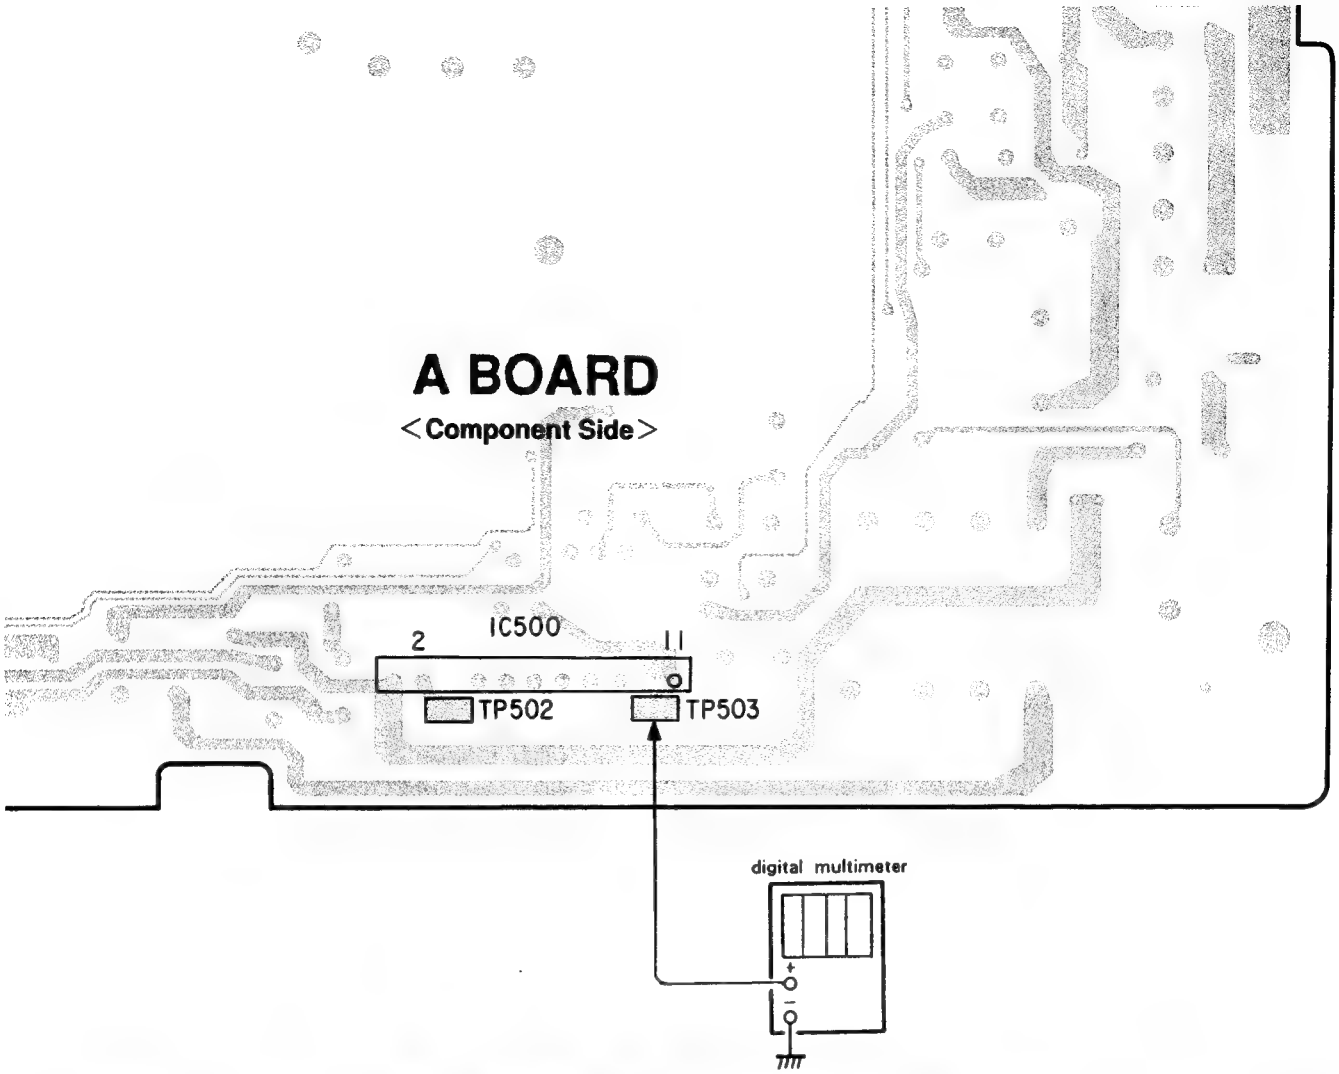
A BOARD
<Component Side>
IC500
2
11
TP502
TP503
digital multimeter

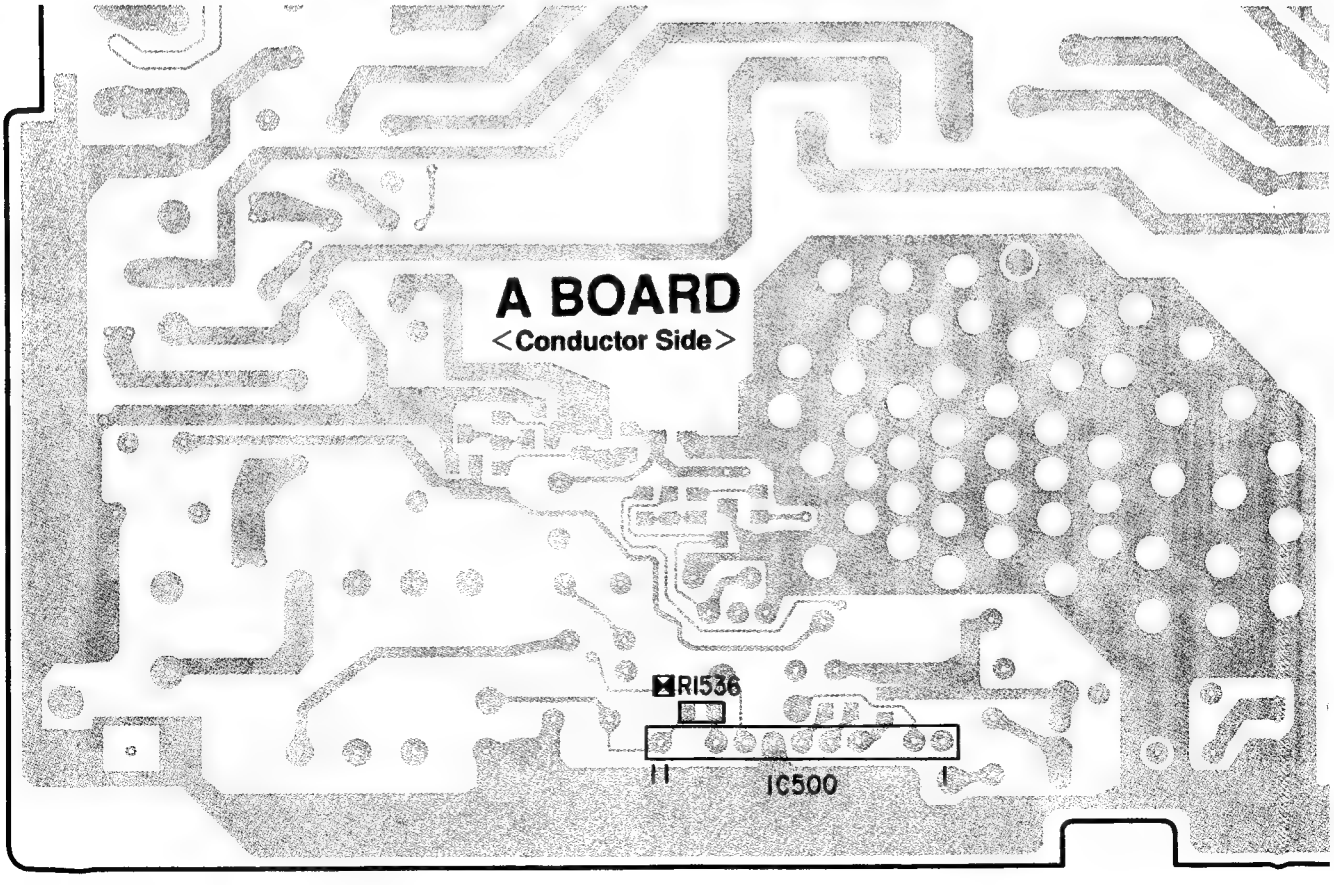
A BOARD
<Conductor Side>
RI536
11
IC500
1

SECTION 5
CIRCUIT ADJUSTMENTS

5-1. A BOARD ADJUSTMENT

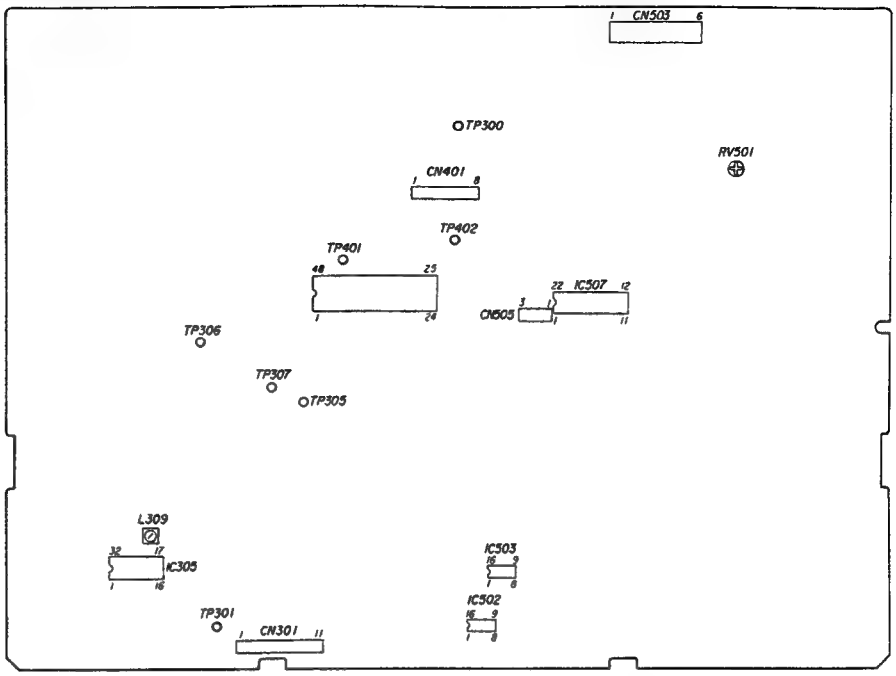

1. PREPARATION/SIGNAL SPECIFICATIONS

1. Signal specifications

* Supply a composite video or component signals from the CN301 connector. Refer to Table 5-1 to take into consideration the effect on the Q board.
The level of the signal to supply should equal to values shown in Table 5-1 plus/minus 2% max.

Table 5-1

Signal		Details ofsignal	Standard level (Pedestal white)	Reduction rate %	Connector supply level (P-W)
Composite video (75% color bar)	358NT 443NT	100% white	0.714V	93%	0.664V
		75% white	0.536V	"	0.498V
		Burst (Green section) (P-P for this item only)	286mV (632mV)	94% (94%)	269mV (594mV)
	PAL SECAM PAL M	100% white	0.7V	"	0.651V
		75% white	0.525V	"	0.488V
		PAL burst (Green section) (P-P for this item only)	300mV (664mV)	94% (94%)	282mV (624mV)
Compo-nent (75% color bar)	BETA 0	100% white	0.7V	94.8%	0.664V
		75% white	0.525	"	0.498V
		75% color B-Y, R-Y (P-P for this item only)	0.7V	"	0.664V
	SMPTE	100% white	0.7V	"	0.664V
		75% white	0.525V	"	0.498V
		75% color B-Y, R-Y (P-P for this item only)	0.525	"	0.498V

2. Preparation

* In this chapter, ☐ indicates the control items in the service mode.
Example: 60 H-FRQ

Write the applicable model data at the location of NO.114 MODEL in the service mode.
Group of models 4 ... 0
Group of models 5 ... 1
Group of models 1 ... 5
Group of models 2 ... 6
Group of models 3 ... 8

* Refer to Table 5-2 for the following groups of models.

Table 5-2

Group of models	Models		
1	PVM-14M4U PVM-14M4A	PVM-14M4J	PVM-14M4E
2	PVM-14M2U	PVM-14M2E	PVM-14M2A
3	PVM-14M1J		
4	PVM-20M4U PVM-20M4A	PVM-20M4J	PVM-20M4E
5	PVM-20M2U	PVM-20M2E	

* CONT 80% is the center click position of the user controller.

2. ADJUSTMENT OF DEFLECTION SYSTEM

1. Adjustment of horizontal oscillation frequency

1. Input a 525 monoscope signal.
2. CONT ... 80%
   BRT 50%
3. Set the unit in the service mode.

4. Connect the IC507 ① PIN on the A board to GND via the 100μ/16V chemical capacitor. (Use CN505③ PIN for GND.) Or insert the H-FREQ jig into CN505.

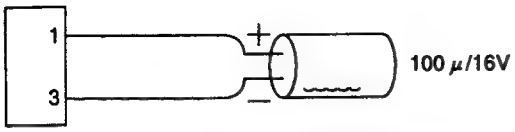

Fig.5-1 H-FREQ jig

5. Adjust [60 H-FREQ] so that the slanting lines on the screen will be vertical. (Fig.5-2)
6. Input a 625 monoscope signal.
7. Adjust [50 H-FREQ] so that the slanting lines on the screen will be vertical. (Fig.5-2)

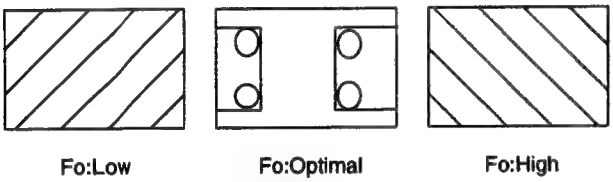

Fig.5-2

2. H BLANKING adjustment

1. Input a 525 monoscope signal.
2. CONT ... 80%
   BRT 50%
3. Set the unit in the service mode.
4. Observe the anode of TP300 or D516 with an oscilloscope, and adjust [H-BLANKING] so that the waveform will be as shown in Fig.5-3.

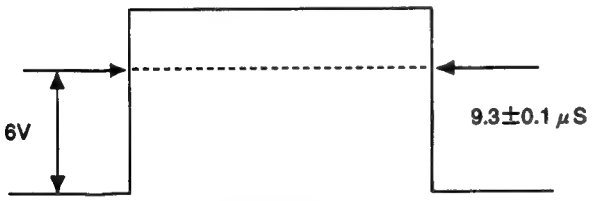

Fig.5-3

3. Picture phase adjustment

1. Input a 525 monoscope signal.
2. Set the unit in the UNDER SCAN mode.
3. CONT ... Min.
   BRT .... Max.
4. Set the unit in the service mode.
5. Adjust [U/N H-SIZE] so that the white frame of the monoscope will be approx. 1 cm to the inside of the effective screen.
6. Turn RV501 (H-CENT) so that B = B'.
7. Adjust [60 VIDEO PHASE] so that the signal area will be in the center (A = A') of the deflection area. (Fig.5-4)
8. Input a 625 monoscope signal.
9. Adjust [50 VIDEO PHASE] in the same manner.

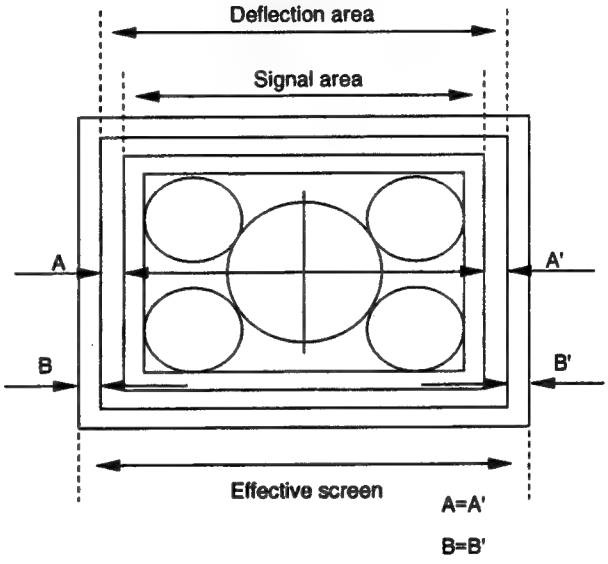

Fig.5-4

4. V BLANKING adjustment

1. Input a 525 monoscope signal.
2. Set the unit in the UNDER SCAN mode.
3. CONT ... Min.
   BRT ... Max.
4. Set the unit in the service mode.
5. Adjust [V-BLANKING <60>] so that the white frame in the upper section of the monoscope will be about to be blanked.

Note : Blanking up to the point 1H away from the white frame is permissible, but the adjusting center should be up to the point 0.5H away from the frame.

6. Cancel the UNDER SCAN mode, and set the unit in the normal 16:9 mode.
7. Adjust [16:9 BLANKING START<60>] and [16:9 BLANKING END<60>] so that the number of frames in the vertical direction in the luminous section of the screen will be 11.74 and the BLK quantity at the top and bottom will be the same.

Note : Make adjustment before 16:9 V-SIZE adjustment.

8. Input a 625 monoscope signal.
9. In the same way as 5. shown above, adjust [V-BLANKING <50>].
10. Adjust [16:9 BLANKING START<50>] and [16:9 BLANKING END<50>], in the same was as 6. and 7., so that the number of frames in the vertical direction in the luminous section of the screen will be 11.2 and the BLK quantity at the top and bottom will be the same.

5. Vertical deflection adjustment

1. Input a 525 monoscope signal.
2. CONT ... 80%
   BRT ... 50%
3. Set the unit in the service mode.
4. Roughly adjust [NOR 60 V.SIZE] so that the size will be 12 frames.
   Adjust V.LIN with [V.LIN].
   Adjust CENT with [V.CENT].
   V.CENT must be reviewed after adjustment of V.LIN.
   Adjust [NOR 60 V.SIZE] so that it will equal the standard value.
5. Set the unit in the 16:9 mode by the user controller SW.
6. Make the same adjustment with [16:9 NOR V.SIZE <60>].
7. Set the unit in the NORMAL SCAN mode.
8. Input a 625 signal.
9. Adjust [NOR 50 V.SIZE] so that the SIZE will equal the standard value.
10. Set the unit in the 16:9 mode.
11. Adjust [16:9 NOR V.SIZE <50>] so that it will equal the standard value.

Table 5-3 NORMAL V. SIZE standard

		525	625
4 : 3		11.75±0.2 frames	11.2±0.2 frames
16 : 9	14"	154mm	←
	20"	217mm	←

6. Horizontal deflection adjustment (Normal scan adjustment)

1. Input a 525 monoscope signal.
2. CONT ... 80%
   BRT 50%
3. Set the unit in the service mode.
4. Rough adjustment of H.SIZE
   Roughly adjust [NOR H.SIZE] so that H.SIZE will be 15.75 frames.
5. Adjust the horizontal deflection by means of [NOR PIN AMP], [NOR PIN PHASE], [NOR U.PIN AMP], [SEXY], [V BOW], [V ANGL], [NOR H SIZE], [L PIN AMP], and [L V BOW].
   (While correcting a distorted parallelogram and curvature with V.ANGL and BOW, make adjustment so that the horizontal and vertical lines of the screen will be straight.)
6. Set the unit in the 16:9 mode.
7. Make the same adjustment as 5. with [16:0 NOR PIN AMP] and [16:9 NOR PIN PHASE]

Table 5-4 NORMAL H. SIZE standard

	525	625
4 : 3	11.75±0.2 frames	15.0±0.2 frames
16 : 9	11.75±0.2 frames	15.0±0.2 frames

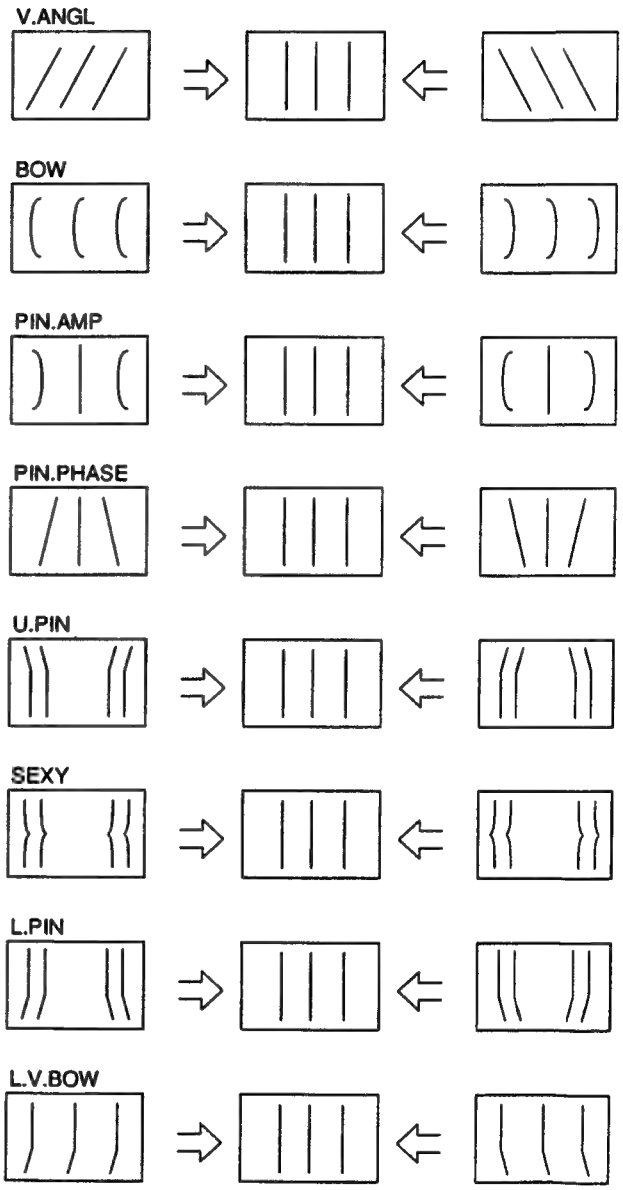

Fig.5-5

7. Horizontal deflection adjustment (UNDER SCAN adjustment)

1. Input a 525 monoscope signal.
2. CONT ... 80%
   BRT 50%
3. Set the unit in the U/S mode.
4. Set the unit in the service mode.
5. Adjust [U/S V SIZE <60>] so that UNDER V.SIZE will be within the standard.
6. Adjust [U/S H SIZE] so that UNDER H.SIZE will be within the standard.
7. Adjust [U/S PIN AMP] and [U/S PIN-PHASE]. (Adjust tracking according to 5., 6., and 7.)
8. After adjustment, the white frame of the monoscope shall not be out of the effective screen.
9. Set the unit in the 16:9 mode.
10. Make the same adjustment with 5. and 7. by means of [16:9 U/S V SIZE <60>], [16:9 U/S PIN-AMP] and [16:9 U/S PIN-PHASE].

Table 5-5
Standerd values for groups of models 1, 2, and 3 (14")

	525	625
U/S H-SIZE V-SIZE	252mm 188mm	←
16 : 9 U/S V-SIZE	142mm	←

Table 5-6
Standerd values for groups of models 4 and 5 (20")

	525	625
U/S H-SIZE V-SIZE	364mm 272mm	←
16 : 9 U/S V-SIZE	205mm	←

11. Set the unit in the 16:9 mode.
12. Input a monoscope signal.
13. Make the same adjustment with 5. by means of [U/S V SIZE <50>].
14. Set the unit in the 16:9 mode.
15. Make the same adjustment with 5. by means of [16:9 U/S V SIZE <50>].

Note : If there is not time enough for adjustment (5. Vertical deflection adjustment and 6. and 7. Horizontal deflection adjustment), confirm that the respective sections will operate normally and that adjustment is possible, and then input standard adjustment values.

8. H/V-DELAY adjustment

Note : This item applies only to groups of models 1, 2, 4, and 5.

8-1. H-DELAY adjustment

1) Input a 525 monoscope signal.
2) CONT ... 80%
   BRT 50%
3) Set the unit in the H/V DELAY mode.
4) Set the unit in the service mode.
5) Connect the probe of an oscilloscope to IC503 ⑦ PIN. Adjust [H DELAY] so that the output waveform will be as shown in Fig.5-6.

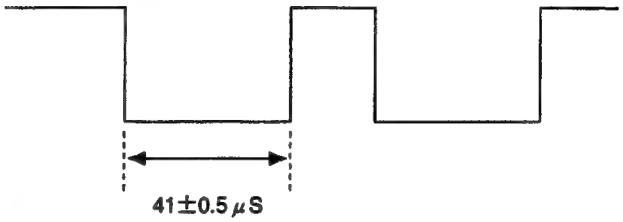

Fig.5-6

8-2. V-DELAY adjustment

1) Input a 525 monoscope signal.
2) CONT ... 80%
   BRT 50%
3) Set the unit in the H/V DELAY mode.
4) Set the unit in the service mode.
5) Connect the probe of an oscilloscope to IC502 ⑦ PIN. Adjust [V DELAY] so that the output waveform will be as shown in Fig.5-7.

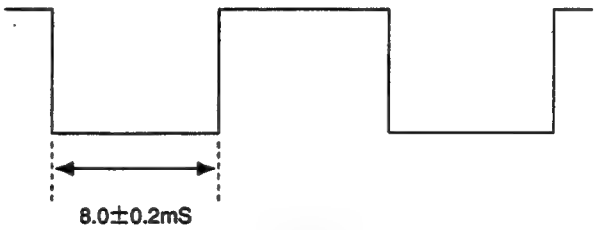

Fig.5-7

8-3. Confirmation of screen
Confirm that the screen is as shown in Fig.5-8.

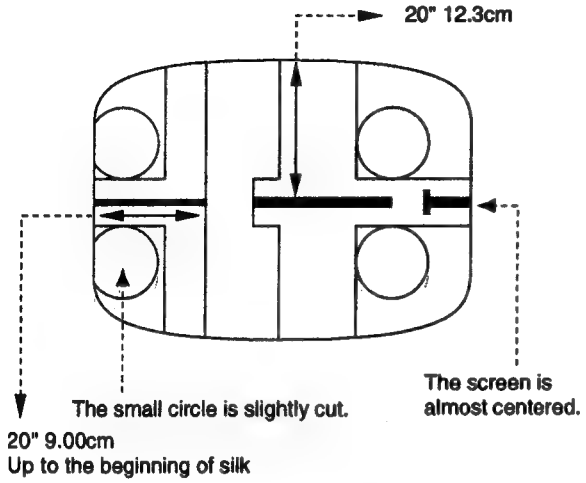

Fig.5-8

9. Writing adjustment results
Write the adjustment results.

Note : Do not turn off the power before writing the adjustment results; otherwise, they will all be lost.

3. Signal system adjustment

1. SUB CON adjustment during NORM and H/V DL

Note : H/V-DL is not applicable to the group of models 3. Adjustment must be completed before the HUE adjustment of NTSC358/443.PAL.

1. Input a vertical white line signal.

Note : Use a vertical white line signal (without 525 burst; H width of 3μS; 100IRE).

2. CONT ... 80%
   BRT 50%
3. Connect the probe of an oscilloscope to CN401 ③ PIN on the A board.
4. Set the unit in the service mode.
5. Temporarily input "69" as an adjustment value for SUB.BRIGHT. Set the values in Table 5-7 as BIAS and GAIN data of C.TEMP1 and C.TEMP2.

Table 5-7

Group of models	1, 4	2, 3, 5
BIAS GREEN	512	400
GAIN GREEN	700	700

6. Adjust the pedestal or the distance between SYNCTIP and WHITE by means of [SUB CON <4:3, NOR>], [SUB CON <4:3, H/V DELAY>], [SUB CON <16:9, NOR>], and [SUB CON <16:9, NOR>].
   SUB CON <4:3. NOR>
   SUB CON <16:9. NOR> (Fig.5-9)

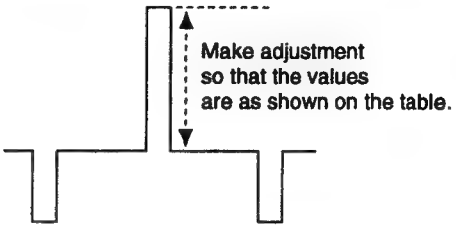

SUB-CON 4:3. H/V-DL
SUB-CON 16:9. H/V-DL

Group of models	4	1	5	2	3
4 : 3	1.39Vp-p	1.16Vp-p	1.37Vp-p	1.47Vp-p	1.47Vp-p
16 : 9	1.22Vp-p	1.04Vp-p	1.19Vp-p	1.32Vp-p	1.32Vp-p

Fig. 5-9

SUB CON <4:3. H/V DELAY>
SUB CON <16:9. H/V DELAY> (Fig.5-10)

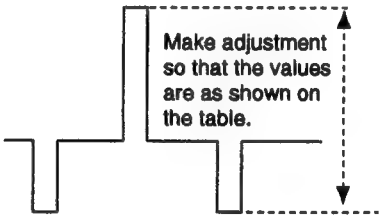

SUB-CON 4:3. H/V-DL
SUB-CON 16:9. H/V-DL

Group of models	4	1	5	2
4 : 3	1.39Vp-p	1.16Vp-p	1.37Vp-p	1.47Vp-p
16 : 9	1.22Vp-p	1.04Vp-p	1.19Vp-p	1.32Vp-p

Fig. 5-10

Note : Not applicable to PVM-14M1J

2. SUB PHASE adjustment

Note : Not applicable to the group of models 3.

1. Input a component color bar (R-Y) and EXT SYNC. (BETA 0 level signal)
2. Set the unit in the EXT SYNC mode for component input.
3. Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
4. Set the unit in the service mode.
5. Adjust [SUB PHASE] so that the output waveform will be minimum (15 mVp-p or less). (Fig.5-11)

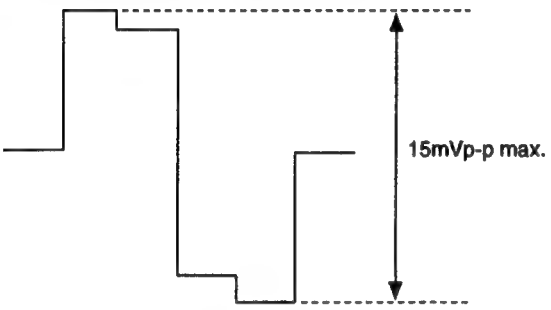

Fig. 5-11

3. SUB PHASE adjustment

Note : Not applicable to groups of models 1, 2, 4, and 5.

1. Input an NTSC color bar.
2. Connect L309 to GND and TP307 to 5V line (L320 line), respectively.
3. Set the unit in the service mode.
4. Adjust [SUB PHASE] so that the output waveform will be minimum (15 mVp-p or less). (Fig.5-11)

4. SUB CHROMA adjustment

Note : Not applicable to the group of models 3.

1. Input component color bars (R-Y, Y, and B-Y). (BETA 0 level signal)
2. Set COMPONENT LEVEL to BETA 0 via MENU.
3. Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
4. Set the unit in the service mode.
5. Adjust [SUB CHROMA NORMAL] so that the peaks of waveforms will be flush with each other as shown in Fig.5-12.

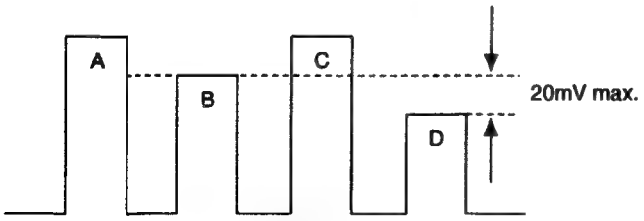

Make B flush with D

Fig. 5-12

5. SUB COL adjustment

Note : Not applicable to groups of models 1, 2, 4, and 5.

1. Set the unit in the service mode.
2. Input adjustment value 98 to [SUB CHROMA NORMAL]. (Fig.5-12)

6. R-Y LEVEL adjustment

Note : Not applicable to the group of models 3.

1. Input component color bars (R-Y, Y, and B-Y). (BETA 0 level signal)
2. Set COMPONENT LEVEL to BETA 0 via MENU.
3. Connect the probe of an oscilloscope to IC404 ㊶ PIN or TP401.
4. Set the unit in the service mode.
5. Adjust [R-Y LEVEL COMPONENT] so that the peaks of waveforms will be flush with each other as shown in Fig.5-13.

Make adjustment so that B = D as shown above. (20 mV max.)
Check that the difference between B and C is 30 mV or less.

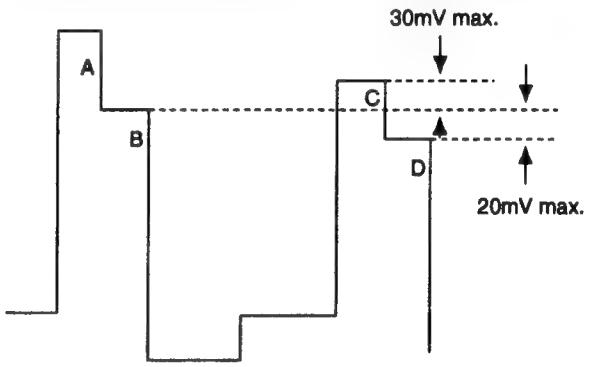

Fig. 5-13

7. SUB CHROMA N10/SMPTE

Note : Not applicable to the group of models 3.

1. Input component color bars (R-Y, Y, and B-Y). (SMPTE level signal)
2. Set COMPONENT LEVEL to N10/SMPTE via MENU.
3. Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
4. Set the unit in the service mode.
5. Adjust [SUB CHROMA SMPTE] so that the levels of B and D will be the same. (Fig.5-14)

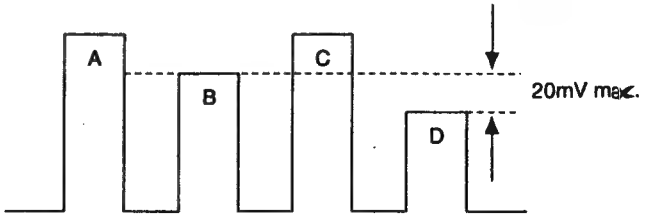

Make B flush with D

Fig. 5-14

8. Adjustment of burst gate pulse width

1. Input an NTSC color bar.
2. Connect the probe of an oscilloscope to TP301 (COMP-SYNC) and Q363 (E) or IC305 ① PIN. (Exercise care since IC305 (1) PIN is a high-impedance line.)
3. Set the unit in the service mode.
4. Adjust BGP WIDTH so that the output waveforms will be as shown in Fig.5-15.

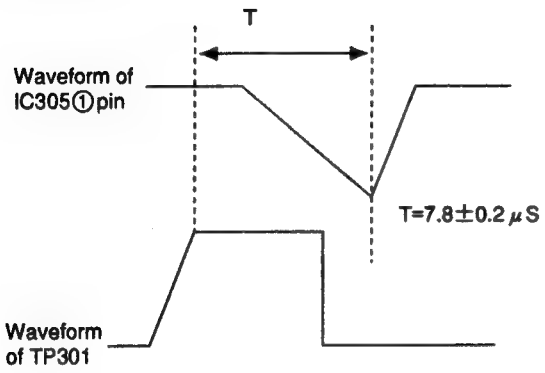

Fig. 5-15

9. VXO adjustment

9-1. X'tal 358

1) Input an NTSC color bar.
2) Connect a frequency counter to IC305 ㉑ PIN.
3) Set the unit in the service mode.
4) Connect IC305 ① PIN as shown in Fig.5-16.
5) Adjust NTSC CRYSTAL so that the counter reading will be within the standard values shown below. (Adjustment may be made at a point at which the color flickering stops.)

X'tal 358 standard vlaue: 3579545±20 Hz

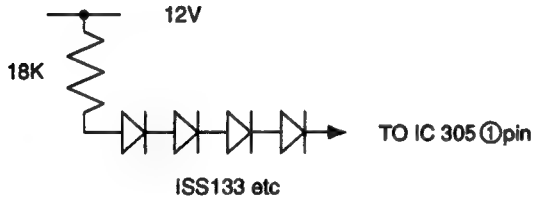

(Arrange 4 Di's as close as possible to ①PIN at the shortest possible distance.)

Fig. 5-16

9-2. X'tal 443

1) Input a 443 NTSC color bar.
2) Connect a frequency counter to IC305 ㉑ PIN.
3) Set the unit in the service mode.
4) Connect IC305 ① PIN in the same way as 9.-4) in 9. VXO adjustment.
5) Adjust NTSC 443 CRYSTAL in the same way as 9.-5) in 9. VXO adjustment.
   X'tal 443 standard value: 4433619±20 Hz

10. NTSC · NTSC443 · PAL color demodulation adjustment

Note : 10-1. is not applicable to the group of models 3.

10-1. NT358PHASE (NORMAL)

1) Input an NTSC color bar.
2) Connect the probe of an oscilloscope to TP306.
3) Set the unit in the H/V DELAY mode.
4) Set the unit in the service mode.
5) Adjust PHASE NTSC 358 NOR so that the burst section of the output waveform will be straight. (Fig.5-17)

10-2. NT 358 PHASE (ACC OFF)

1) Conduct ACC OFF via MENU.
2) Make adjustment in the same way as 10-1. shown above by means of PHASE NTSC 443 ACC OFF. (Fig.5-17)

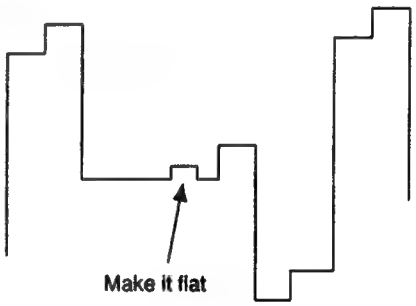

Fig. 5-17

10-3. NT 358 B-Y PHASE

Note : Make adjustment after PHASE adjustment and before CHROMA adjustment.

1) Input an NTSC color bar. (Input only the R-Y component. B-Y and Y should be OFF.)
2) Connect the probe of an oscilloscope to TP305.
3) Set the unit in the service mode.
4) Adjust B-Y PHASE NTSC 358 so that the color components will be straight.

10-4. NT 358 CHROMA (NORMAL)

1) Input an NTSC color bar.
2) Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
3) Set the unit in the service mode.
4) Adjust CHROMA NTSC 358 NOR so that the peaks of waveforms will be flush with each other as shown in Fig.5-18.

10-5. NT 358 CHROMA (ACC OFF)

Note : 10-5. is not applicable to the group of models 3.

1) Conduct ACC OFF via MENU.
2) Adjust [CHROMA NTSC 358 ACC OFF] in the same way as 10-4. shown above. (Fig.5-18)

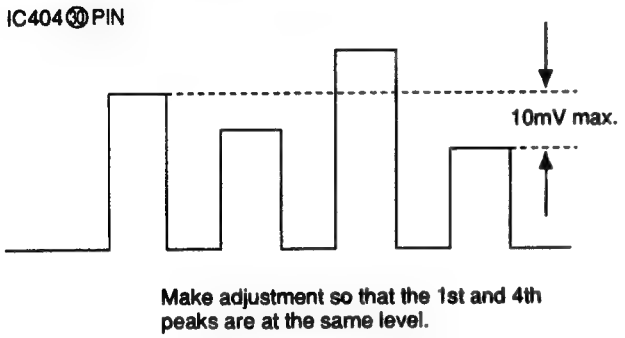

Fig. 5-18

10-6. NTSC 358 R-Y LEVEL

Note : Be sure to set ACC in the ON position before this adjustment.

1) Input an NTSC 358 color bar.
2) Connect the probe of an oscilloscope to IC 404 ㉛PIN or TP401.
3) Set the unit in the service mode.
4) Adjust [R-Y LEVEL NTSC 358] so that the peaks of waveforms will be flush with each other as shown in Fig.5-19.

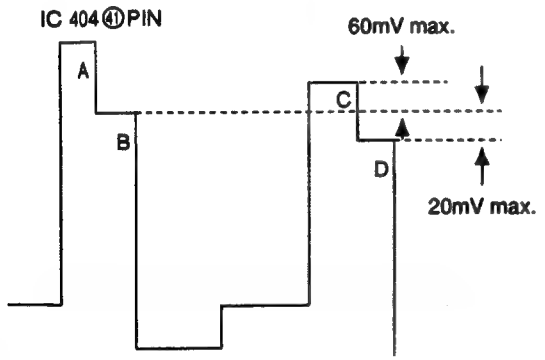

Fig. 5-19

10-7. NTSC 443 PHASE (NORMAL)

Note : 10-7-3). is not applicalbe to the group of models 3.

1) Input an NTSC 433 color bar.
2) Connect the probe of an oscilloscope to TP306.
3) Set the unit in the H/V DELAY mode.
4) Set the unit in the service mode.
5) Adjust [PHASE NTSC 443 NOR] so that the burst section of the output waveform will be straight. (Fig.5-20)

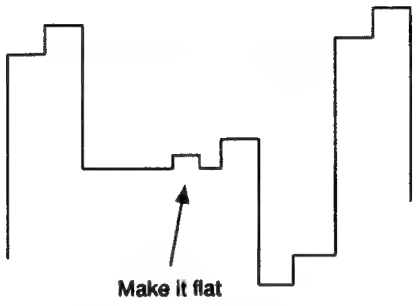

Fig. 5-20

10-8. NTSC 443 PHASE (ACC OFF)

Note : 10-8. is not applicable to group of models 3.

1) Conduct ACC OFF via MENU.
2) Adjust [PHASE NTSC 443 ACC OFF] in the same way as 10-7-5). (Fig.5-21)

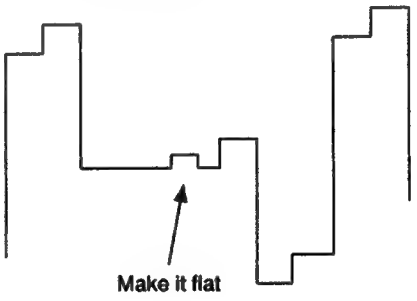

Fig. 5-21

10-9. NTSC 443 B-Y PHASE
NTSC 443 CHROMA NOR

Note : Be sure to set ACC in the ON position before this adjustment.
Note : Remove HV.DELAY before this adjustment.

1) Input an NTSC 443 color bar.
2) Connect the probe of an oscilloscope to TP402.
3) Set the unit in the service mode.
4) While tracking by means of [B-Y PHASE NTSC 443] and [CHROMA NTSC 443 NOR], make adjustment so that the peaks of waveforms will be the same. (Fig.5-22)

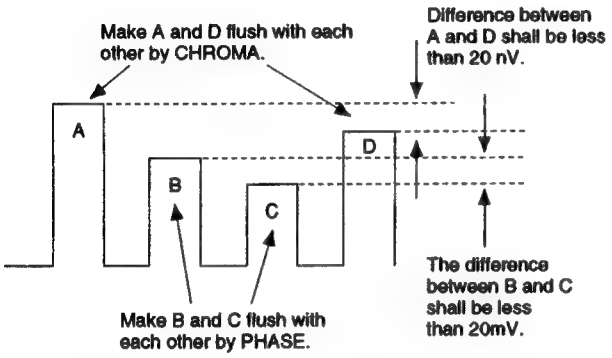

Fig. 5-22

10-10. NTSC 443 CHROMA (ACC OFF)

Note : 10-10. is not applicable to the group of models 3.

1) Conduct ACC OFF via MENU.
2) Adjust [CHROMA NTSC 443 ACC OFF] in the same way as 10-9-4). (Fig.5-23)

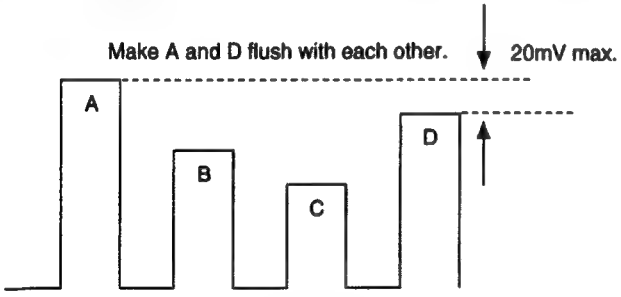

Fig. 5-23

10-11. NT 443 R-Y LEVEL

Note : Be sure to set ACC in the ON position before this adjustment.

1) Input an NTSC 443 color bar.
2) Connect the probe of an oscilloscope to TP401.
3) Set the unit in the service mode.
4) Adjust [R-Y LEVEL NTSC 443] in the same way as 10-6-4). (Fig.5-24)

Make adjustment so that B = D. (20 mV max.) Check that the difference between B and C is 60 mV or less.

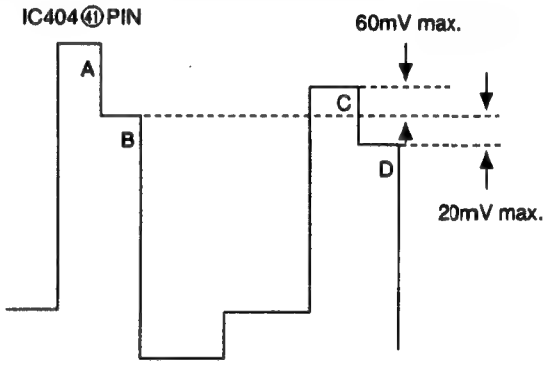

Fig. 5-24

10-12. PAL PHASE (NORMAL)
1) Input a PAL SP color bar.
2) Connect the probe of an oscilloscope to TP306.
3) Set the unit in the service mode.
4) Adjust [PHASE PAL NOR] so that the waveform of the B-Y anti-PAL signal will be "0."

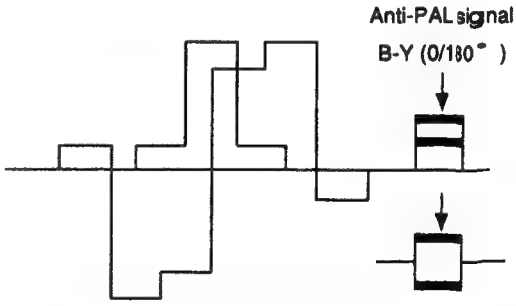

*The signal waveform differs slightly every hour. Adjust it to "0."

Fig. 5-25 R-Y OUT

10-13. PAL PHASE (ACC OFF)

Note : 10-13. is not applicable to the group of models 3.

1) Conduct ACC OFF via MENU.
2) Adjust [PHASE PAL ACC OFF] in the same way as 10-12-4).

10-14. PAL B-Y PHASE

Note : Be sure to set ACC in the ON position before this adjustment.

1) Input a PAL SP color bar.
2) Connect the probe of an oscilloscope to TP305.
3) Set the unit in the service mode.
4) Adjust [B-Y PHASE PAL] so that the waveform of the R-Y anti-PAL signal will be "0." (Fig.5-26)

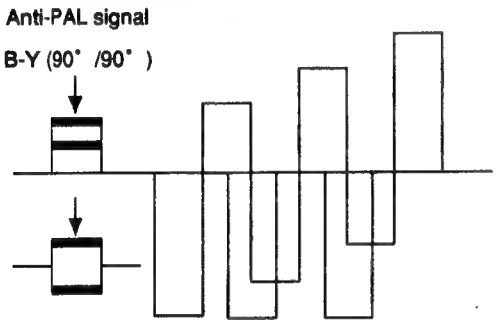

*The signal waveform differs slightly every hour. Adjust it to "0."

Fig. 5-26 B-Y OUT

10-15. PAL CHROMA (NORMAL)

1) Input a PAL color bar.
2) Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
3) Set the unit in the service mode.
4) Adjust [CHROMA PAL NOR] so that the peaks of waveforms will be flush with each other. (Fig.5-27)

10-16. PAL CHROMA (ACC OFF)

Note : 10-16. is not applicable to the group of model 3.

1) Conduct ACC OFF via MENU.
2) Adjust [CHROMA PAL ACC OFF] in the same way as10-15-4).(Fig.5-27)

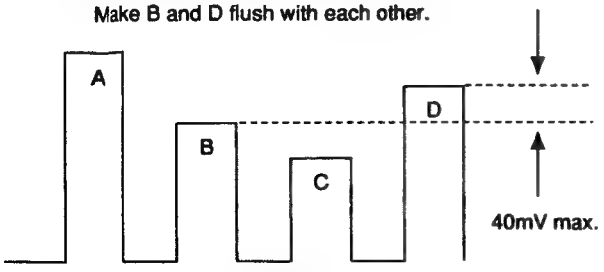

Fig. 5-27

10-17. PAL R-Y LEVEL

Note : Be sure to set ACC in the ON position before this adjustment.

1) Input a PAL color bar.
2) Connect the probe of an oscilloscope to IC404 ㊶ PIN or TP401.
3) Set the unit in the service mode.
4) Adjust [R-Y LEVEL PAL] so that the peaks of waveforms will be flush with each other as shown on the right. (Fig.5-28)

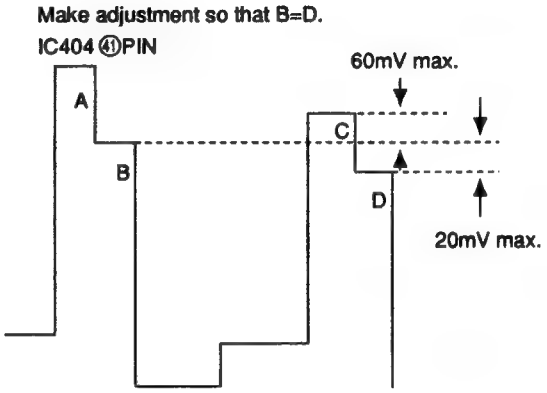

Fig. 5-28

11. SECAM adjustment

Note : Make adjustment after deflection adjustment.
Note : Subject to H-FREQ, H-BLK, VIDEO-PHASE, ANGLE, BOW, H-DELAY, etc.
Note: 11. SECAM adjustment is not applicable to the group of models 3.

11-1. HP WIDTH (NORMAL) adjustment

1) Input a SECAM color bar.

Note : The board is roughly adjusted in 11-1., and IC317 ⑩ PIN pulse width may be used for control.

2) Set the unit in the UNDER SCAN mode.
3) Set the unit in the service mode.
4) Adjust [HP WIDTH NOR] so that the color section at the left edge of the upper portion of the screen is about to disappear. (Fig.5-29)



Make adjustment so that colors are about to disappear.

Fig. 5-29

11-2. Writing HP.WIDTH (NORMAL) data

Note : Not applicable to groups of models 1, 2, 4, and 5.

1) Set the unit in the service mode.
2) Input 102 to HP.WIDTH (NOR).

11-3. HP POSITION adjustment

Note : 11-3. is not applicable to the group of models 3.

1) Input a SECAM color bar.
2) Set the HV-DL mode.
3) Set the unit in the service mode.
4) Adjust [HP POSITION] as shown in Fig.5-30.

Note : The same as 11-3. The phase relationship between the beginning of IC317 ⑲ PIN pulse and the input VIDEO signal may be used for control.

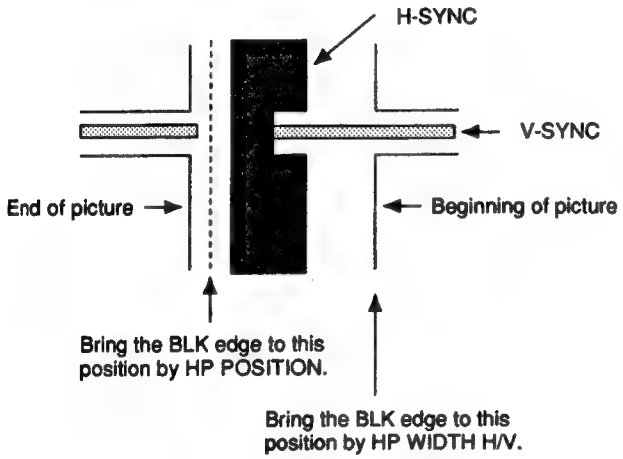

Fig. 5-30

11-4. HP WIDTH (H/V-DL) adjustment

Note : 11-4. is not applicable to the group of models 3.

1) Input a SECAM color bar.
2) Set the unit in the HV-DELAY mode.
3) Set the unit in the service mode.
4) Adjust [HP WIDTH H/V-DELAY] as shown in Fig.5-30. (Note: Check HP POSITION. If it is not in position, repeat 2) and 3).)

11-5. SECAM COL BALANCE

Note : 11-5. is not applicable to the group of models 3.

1) Input a SECAM color bar.
2) Connect the probe of an oscilloscope to TP306.
3) Set the unit in the service mode.
4) Adjust [SECAM COLOR BALANCE R-Y] so that the level in the achromatic color will be straight.
5) Connect the probe of an oscilloscope to TP305.
6) Adjust [SECAM COLOR BALANCE B-Y] so that the level in the achromatic color will be straight.

11-6. SECAM CHROMA

1) Input a SECAM color bar.
2) Connect the probe of an oscilloscope to IC404 ㉚ PIN or TP402.
3) Set the unit in the service mode.
4) Adjust [CHROMA SECAM] so that the peaks of waveforms will be flush with each other as shown in Fig.5-31.

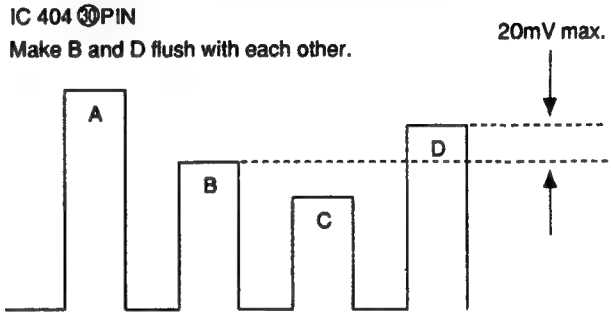

Fig. 5-31

11-7. SECAM R-Y LEVEL

1) Input a SECAM color bar.
2) Connect the probe of an oscilloscope to IC404 ㊶ PIN or TP401.
3) Set the unit in the service mode.
4) Adjust [R-Y LEVEL SECAM] so that the peaks of waveforms will be flush with each other as shown in Fig.5-32.

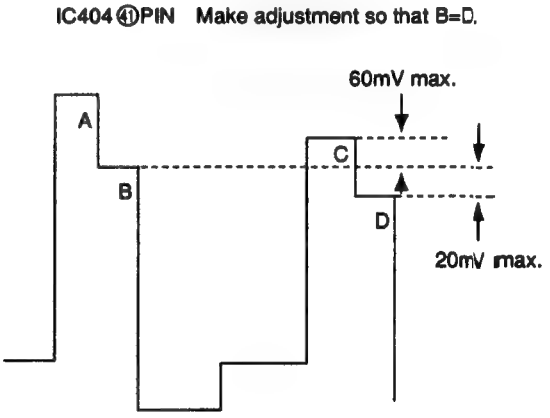

Fig. 5-32

12. Writing adjustment results

Write adjustment results in the memory.

SECTION 6
DIAGRAMS

6-1. BLOCK DIAGRAMS (1)

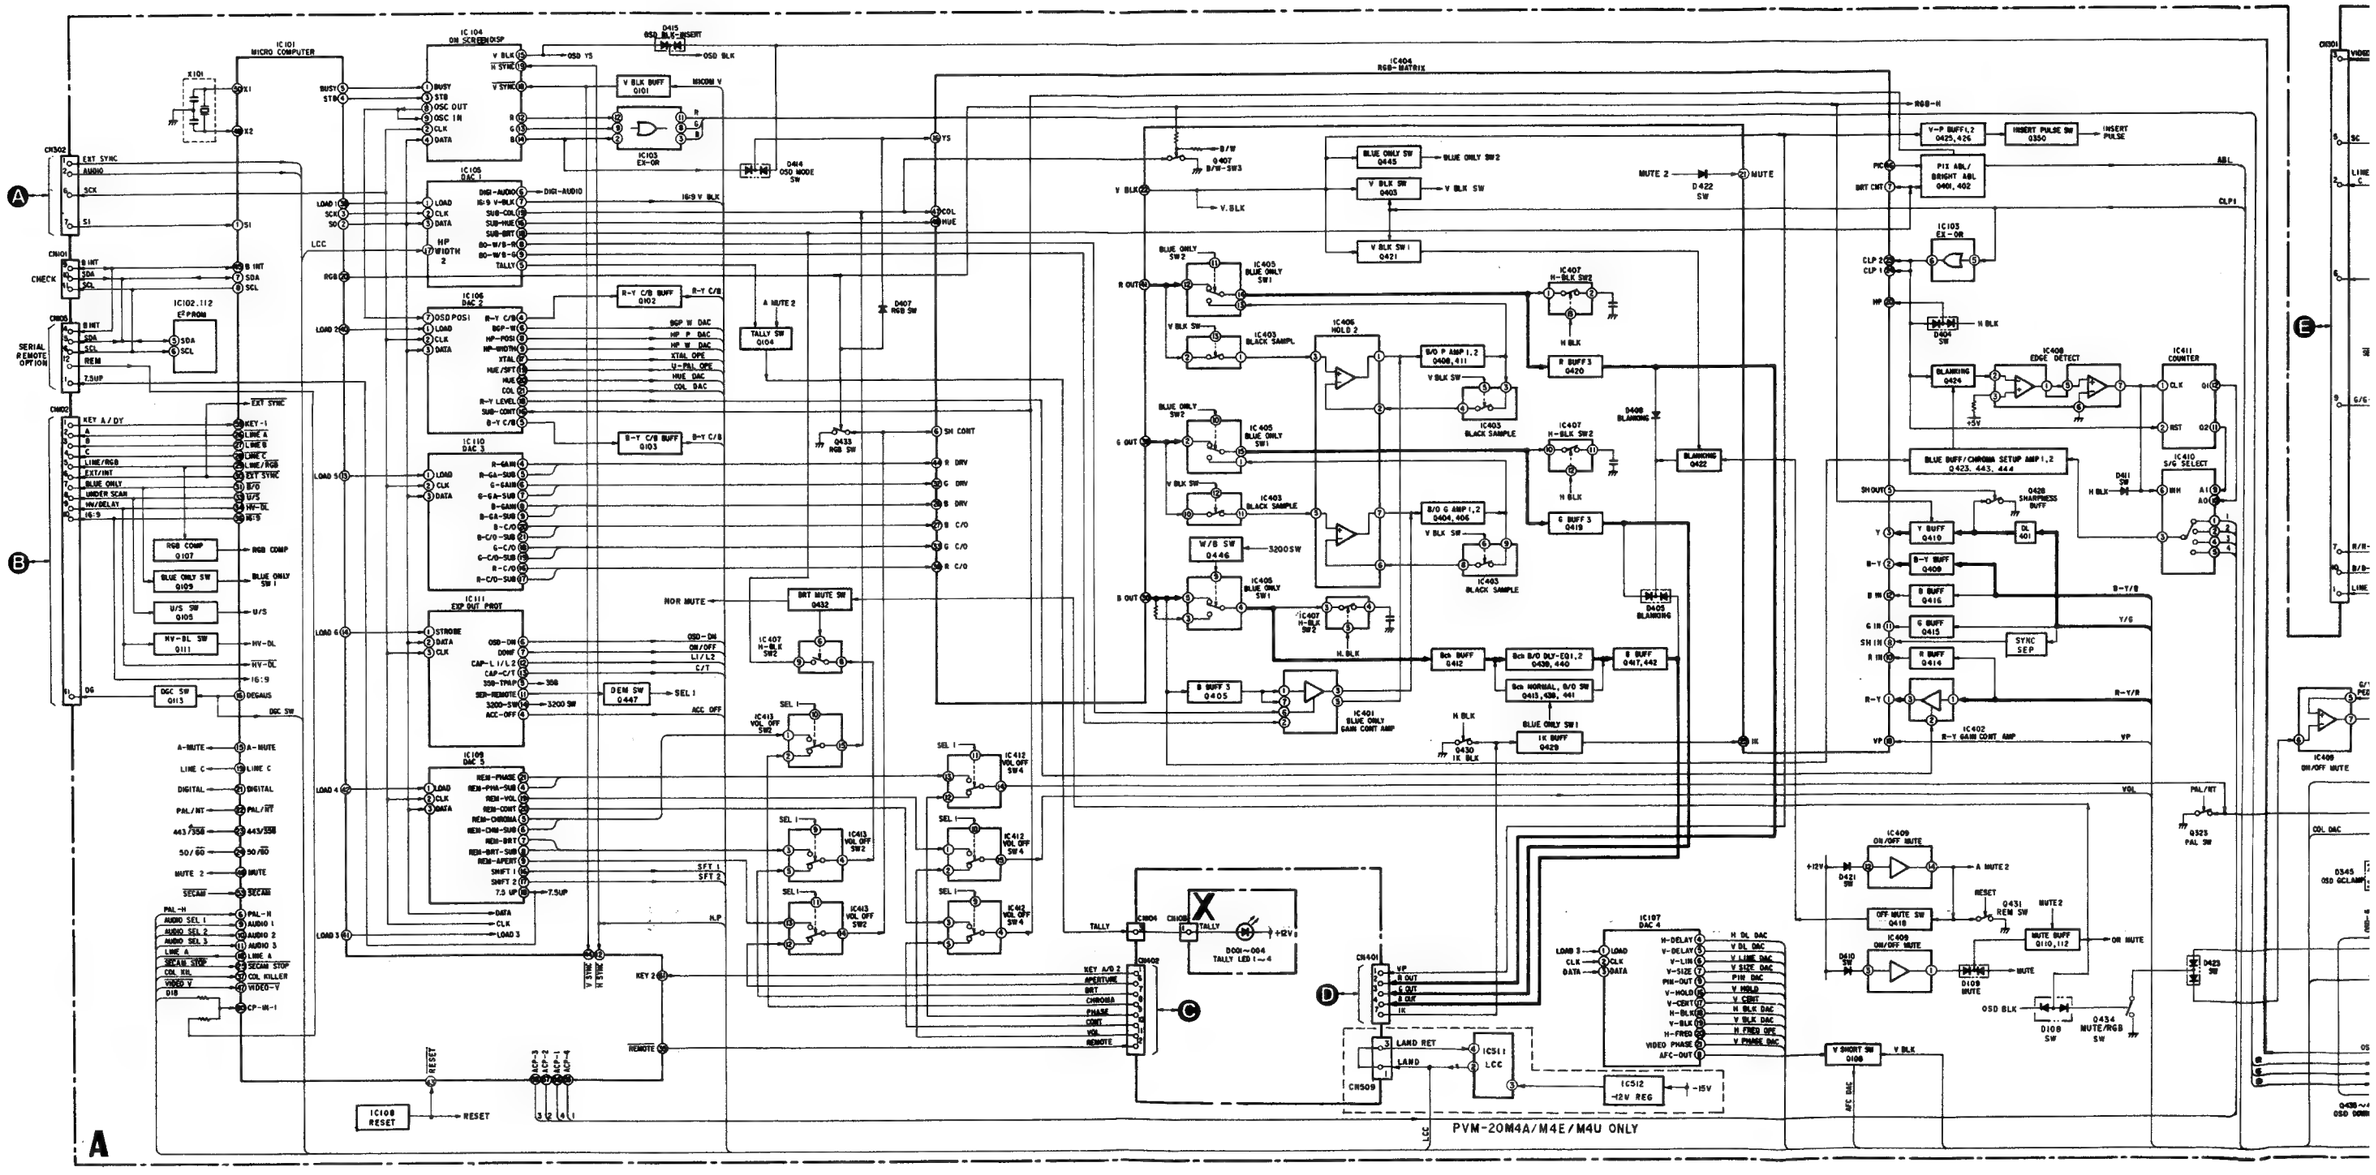

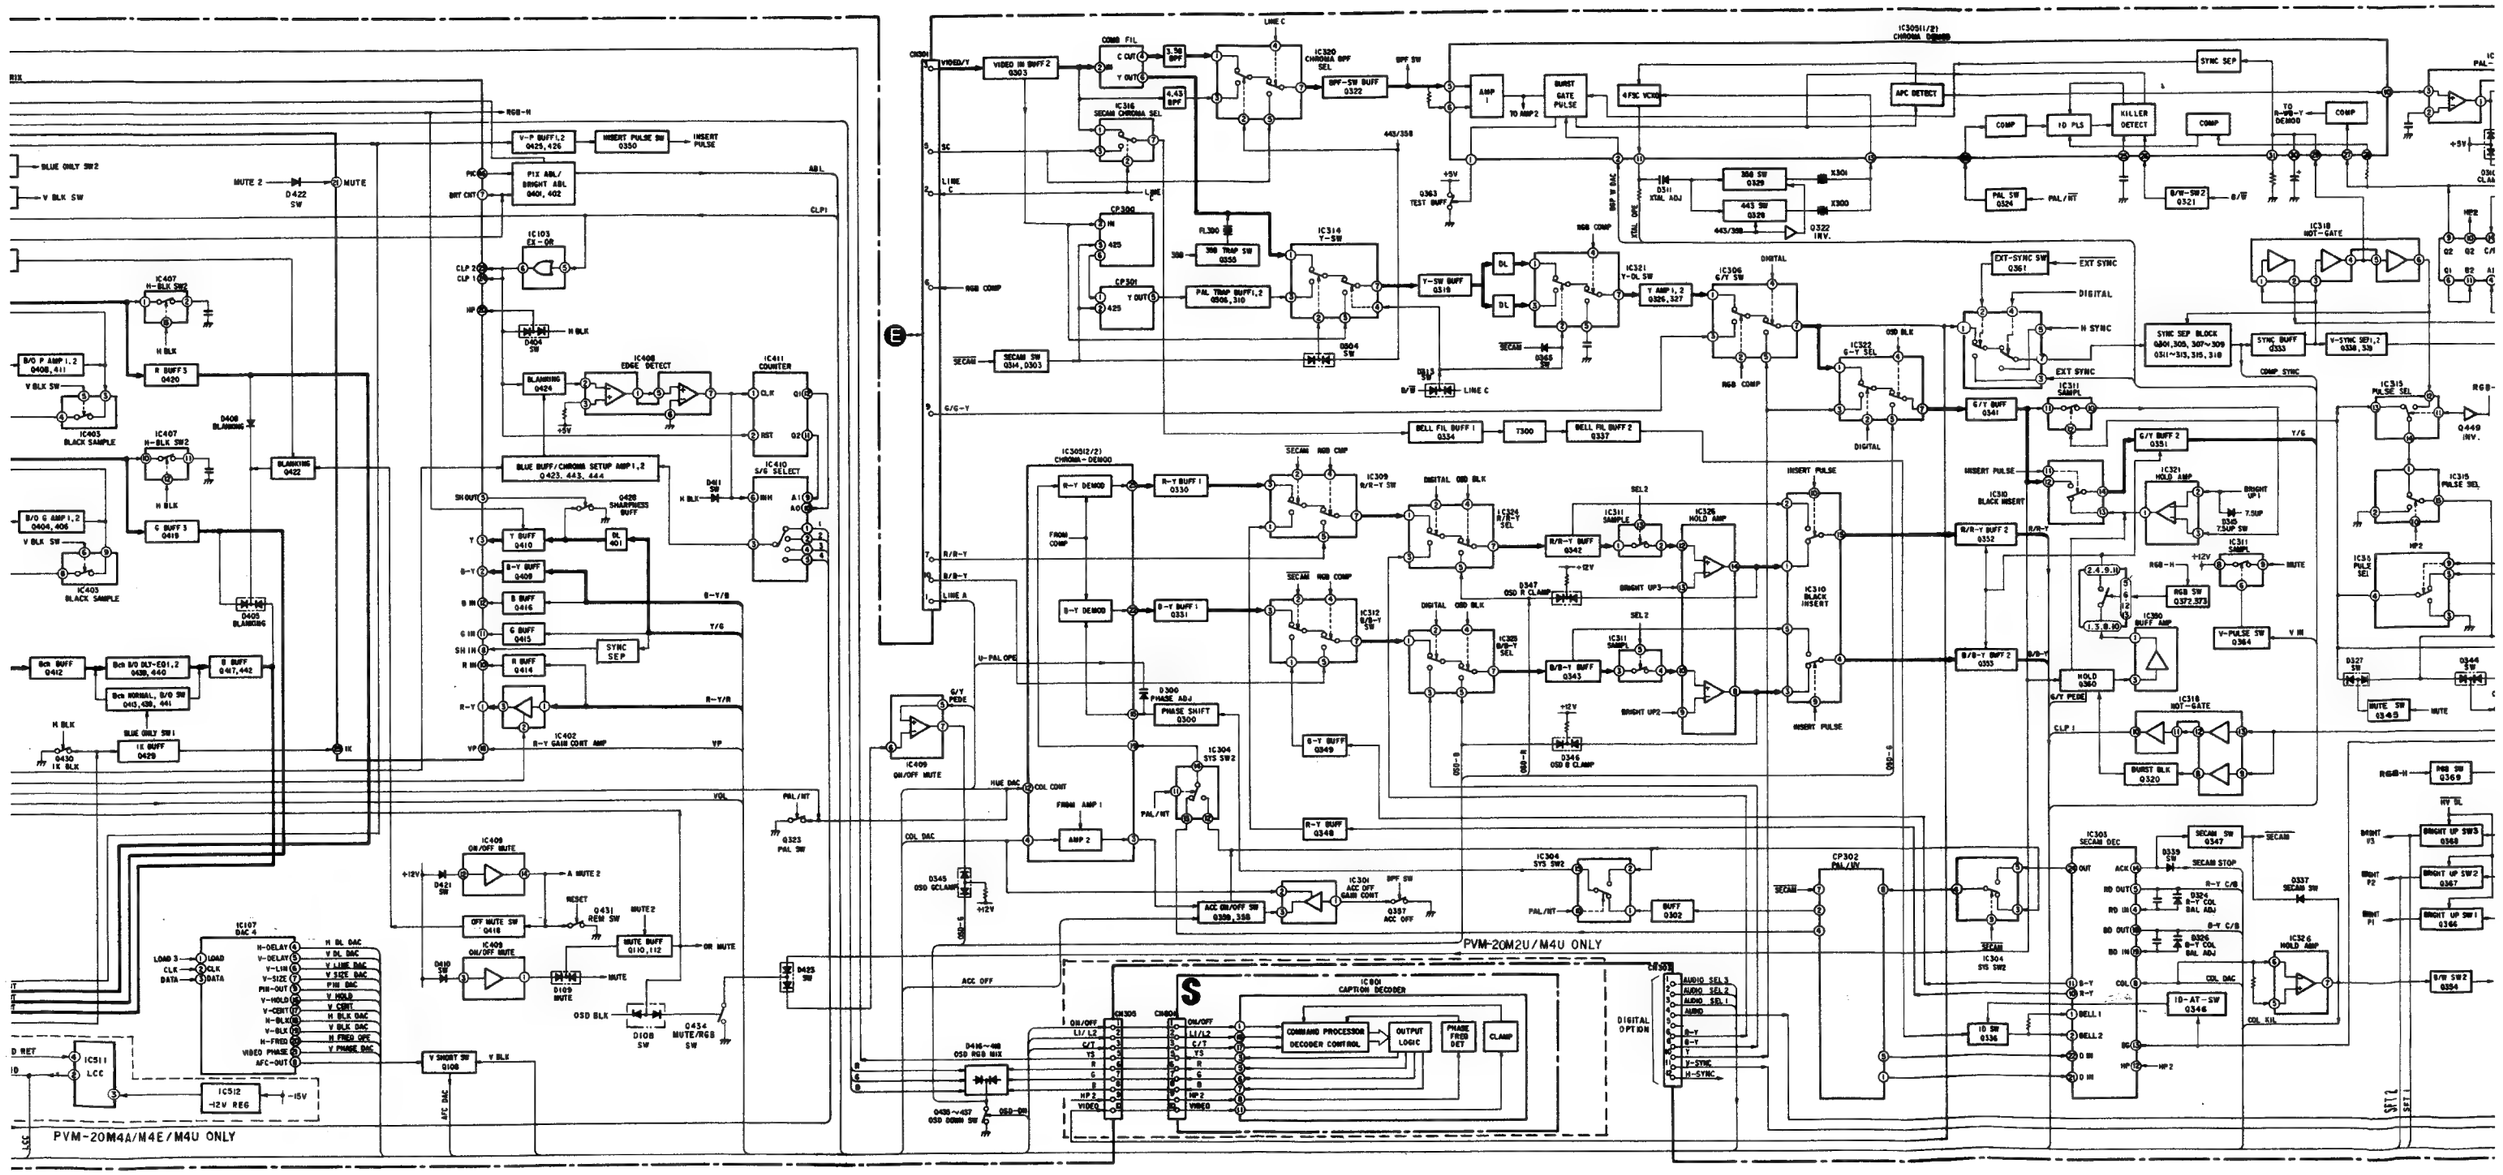
PVM-20M4A/M4E/M4U ONLY
PVM-20M2U/M4U ONLY
IC501 CAPTION DECODER
COMMAND PROCESSOR
DECODER CONTROL
OUTPUT LOGIC
PHASE FREQ DET
CLAMP
IC107 DAC 4
IC512 -12V REG
IC511 LCC
IC407 H-BLK SW2
IC403 BLACK SAMPLE
IC405 BLANKING
IC408 EDGE DETECT
IC411 COUNTER
IC410 S/B SELECT
IC103 EX-OR
IC402 R-Y GAIN CONT AMP
IC409 ON/OFF MUTE
IC320 CHROMA BPF SEL
IC316 SECAM CHROMA SEL
IC314 Y-SW
IC321 Y-DL SW
IC306 G/Y SW
IC322 G-Y SEL
IC309 B/R-Y SW
IC312 B/R-Y SW
IC324 B/R-Y SEL
IC326 HOLD AMP
IC310 BLACK INSERT
IC304 SYS SW2
IC301 ACC OFF GAIN CONT
IC318 NOT-GATE
IC315 PULSE SEL
IC303 SECAM DEC
IC327 HOLD AMP
IC386 BUFF AMP
CP300
CP301
CP302 PAL/SW
CN305
CN306
VIDEO IN BUFF 2 Q303
C OUT
Y OUT
3.58 BPF
4.43 BPF
BPF-SW BUFF Q322
AMP 1
TO AMP 2
BURST GATE PULSE
4.43C VCXO
APC DETECT
COMP
ID PLS
KILLER DETECT
TO R-SB-Y DEMOD
PAL SW Q324
PAL/NT
B/W-SW2 Q321
B/W
443 SW Q329
358 SW Q328
X301
X300
Q322 INV.
Q311 X'TAL ADJ
Q363 TEST BUFF
358 TRAP SW Q355
PAL TRAP BUFF1,2 Q506,510
Y-SW BUFF Q319
Y AMP1,2 Q326,327
RGB COMP
DIGITAL
EXT-SYNC SW Q361
EXT SYNC
H SYNC
SYNC SEP BLOCK Q501~513,515,518
SYNC BUFF Q333
V-SYNC SEP1,2 Q338,339
COMP SYNC
SECAM SW Q304,Q303
Q365 SW
Q504 SW
BELL FIL BUFF 1 Q334
T300
BELL FIL BUFF 2 Q337
R-Y BUFF 1 Q330
B-Y DEMOD
B-Y BUFF 1 Q331
R-Y BUFF Q342
B-Y BUFF Q343
R-Y BUFF Q348
B-Y BUFF Q349
OSD R CLAMP Q347
OSD B CLAMP Q346
PHASE ADJ Q300
PHASE SHIFT Q300
HUE DAC
COL DAC
COL COUNT
FROM AMP 1
AMP 2
ON/OFF MUTE
OSD SCLAMP Q345
ACC ON/OFF SW Q309,338
ACC OFF
Q337 ACC OFF
BUFF Q302
G/Y BUFF Q341
G/Y BUFF 2 Q351
B/R-Y BUFF 2 Q352
B/R-Y BUFF Q353
INSERT PULSE
BLACK INSERT
HOLD Q360
G/Y PEDE
BRIGHT UP1
BRIGHT UP2
BRIGHT UP3
Q349 7.5UP SW
Q347 OSD R CLAMP
Q346 OSD B CLAMP
RGB SW Q372,373
V-PULSE SW Q364
MUTE SW Q345
MUTE
BURST BLK Q320
RGB SW Q369
BRIGHT UP SW3 Q368
BRIGHT UP SW2 Q367
BRIGHT UP SW1 Q366
B/W SW2 Q354
SECAM SW Q347
SECAM STOP
Q339 SW
Q337 SECAM SW
R-Y C/B
B-Y C/B
Q330 R-Y COL BAL ADJ
Q305 B-Y COL BAL ADJ
ID-AT-SW Q346
ID SW Q336
COL KIL
AUDIO SEL 3
AUDIO SEL 2
AUDIO SEL 1
AUDIO
DELL 1
DELL 2
DIGITAL OPTION
V-P BUFF1,2 Q429,426
INSERT PULSE SW Q350
INSERT PULSE
PIX ABL/ BRIGHT ABL Q401,402
ABL
CLP1
H BLK
Q404 SW
BLANKING Q424
BLANKING Q422
D408 BLANKING
D405 BLANKING
BLUE BUFF/CHROMA SETUP AMP1,2 Q423,443,444
D411 SW
SHARPNESS BUFF Q428
Y BUFF Q410
B-Y BUFF Q409
B BUFF Q416
G BUFF Q415
R BUFF Q414
SYNC SEP
B/G P AMP1,2 Q408,411
V BLK SW
R BUFF 3 Q420
G BUFF 3 Q419
B/G R AMP1,2 Q404,406
Bch BUFF Q412
Bch B/G DLY-EQ1,2 Q438,440
B BUFF Q417,442
Bch NORMAL, B/G SW Q413,439,441
BLUE ONLY SW1
1E BUFF Q429
1E
1X
MUTE 2
MUTE
D422 SW
RGB-H
BLUE ONLY SW2
V BLK SW
OFF MUTE SW Q418
Q431 REM SW
MUTE2
MUTE BUFF Q110,112
D108 SW
D109 MUTE
OSD BLK
Q434 MUTE/RGB SW
Q425 SW
Q323 PAL SW
V SHORT SW D106
AFC DAC
Q436~438 OSD RGB MIX
OSD-SW
ACC OFF
H BL DAC
V BL DAC
V LINE DAC
V SIZE DAC
PIN DAC
V HOLD
V CENT
H BLK DAC
V BLK DAC
H FREQ DET
V PHASE DAC
AFC-OUT
H-DELAY
V-DELAY
V-LIN
V-SIZE
PIN-OUT
V-HOLD
V-CENT
H-BLK
V-BLK
H-FREQ
VIDEO PHASE
LOAD
CLK
DATA
+12V
+15V
+5V
+9V
-15V
+8V
+2.4,9.1V
+1.5,8.1V
SECAM
PAL/NT
SCC
SDT1

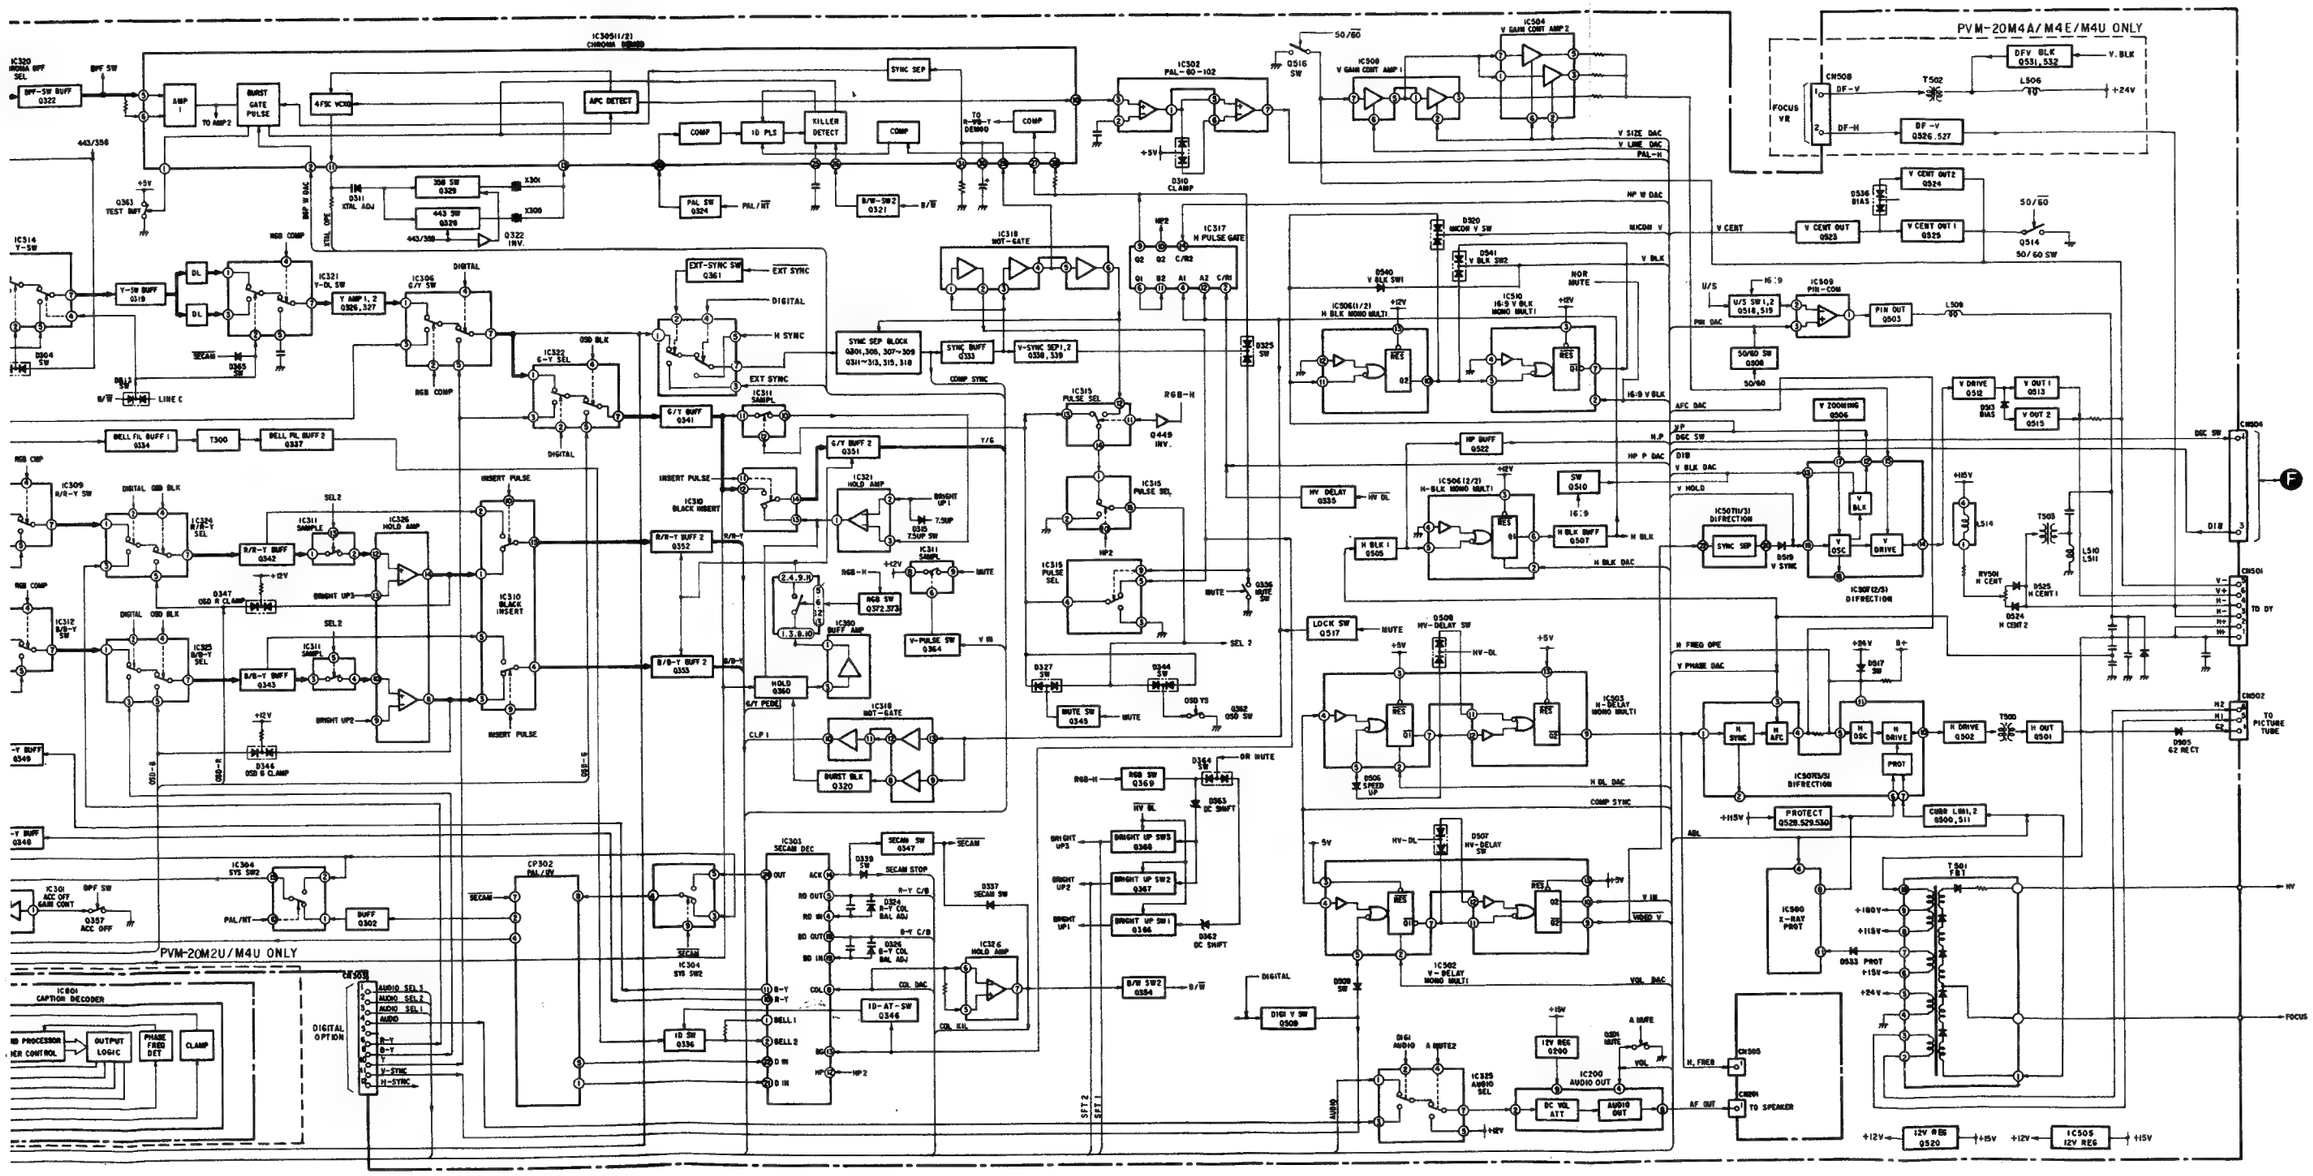
PVM-20M4A/M4E/M4U ONLY
PVM-20M2U/M4U ONLY
IC320 CHROMA BUFF SEL
BPF-SW BUFF Q322
BPF SW
AMP 1
TO AMP 2
BURST GATE PULSE
4FSC VCXO
IC305II/21 CHROMA DEMOD
SYNC SEP
APC DETECT
COMP
ID PLS
KILLER DETECT
TO R-Y/B-Y DEMOD
IC302 PAL-DL-102
50/60
Q516 SW
IC504 V GAIN CONT AMP 2
IC508 V GAIN CONT AMP 1
443/358
Q363 TEST BUFF
358 SW Q329
443 SW Q328
X301
X300
Q322 INV.
Q311 XTAL ADJ
PAL SW Q324
PAL/NT
B/W SW2 Q321
B/W
D310 CLAMP
IC314 Y-SW
Y-SW BUFF Q319
IC321 Y-DL SW
Y AMP 1, 2 Q326, 327
D304 SW
DL1
DL2
B/W
LINE C
SECAM
D365 SW
RGB COMP
IC306 C/Y SW
DIGITAL
EXT-SYNC SW Q361
EXT SYNC
H SYNC
IC322 C-Y SEL
OSD BLK
SYNC SEP BLOCK Q301, 305, 307~309 Q311~313, 315, 318
SYNC BUFF Q333
V-SYNC SEP1, 2 Q330, 339
IC318 NOT-GATE
IC317 H PULSE GATE
D325 SW
D320 NICON V SW
D321 V BLK SW2
D540 V BLK SW1
IC506(1/2) H BLK MONO MULTI
IC510 16:9 V BLK MONO MULTI
NOR MUTE
16:9 V BLK
V SIZE DAC
V LINE DAC
PAL-H
HP W DAC
NICON V
V CENT
V BLK
V CENT OUT2 Q524
V CENT OUT Q523
V CENT OUT1 Q529
D536 BIAS
50/60
Q514 50/60 SW
U/S
16:9
U/S SW1, 2 Q518, 519
IC509 PIN-CONE
PIN OUT Q503
L508
PIN DAC
50/60 SW Q508
DELL FIL BUFF 1 Q334
T300
DELL FIL BUFF 2 Q337
G/Y BUFF Q341
G/Y BUFF 2 Q351
IC311 SAMPL
IC315 PULSE SEL
Q449 INV.
RGB-H
Y/G
INSERT PULSE
IC310 BLACK INSERT
IC321 HOLD AMP
BRIGHT UP1
Q315 7.5UP SW
IC309 R/B-Y SW
DIGITAL OSD BLK
IC326 HOLD AMP
R/B-Y BUFF Q342
R/B-Y
SEL 2
IC311 SAMPL
IC315 PULSE SEL
MP2
HP BUFF Q522
HV DELAY Q355
HV DL
SW Q510
16:9
IC506(2/2) H-BLK MONO MULT
H BLK 1 Q505
H BLK BUFF Q507
H BLK
H BLK DAC
IC507(1/3) DIFRECTION
SYNC SEP
D549 V SYNC
V BLK
V OSC
V DRIVE
IC507(2/3) DIFRECTION
V DRIVE Q512
V OUT 1 Q513
V OUT 2 Q515
D263 BIAS
V ZOOMING Q506
AFC DAC
HP
DEF SW
HP P DAC
DIB
V BLK DAC
V HOLD
+185V
L514
T503
L510
L511
D525 H CENT 1
D524 H CENT 2
RV501 H CENT
CN504
DEF SW
DIB
CN501
V-
V+
H-
H+
H1
H2
TO DY
CN502
TO PICTURE TUBE
D505 G2 RECT
F
IC312 R/B-Y SW
IC325 R/B-Y SEL
B/B-Y BUFF Q343
B/B-Y BUFF 2 Q353
HOLD Q360
G/Y PEDE
CLP 1
BURST BLK Q320
IC316 NOT-GATE
IC310 BLACK INSERT
INSERT PULSE
Q347 OSD H CLAMP
D344 OSD G CLAMP
+12V
BRIGHT UP3
BRIGHT UP2
IC311 SAMPL
IC390 BUFF AMP
RGB SW Q372, 373
V-PULSE SW Q364
V IN
Q327 SW
Q344 SW
MUTE SW Q345
MUTE
Q336 MUTE SW
OSD Y5
Q352 OSD SW
SEL 2
LOCK SW Q517
MUTE
D508 HV-DELAY SW
HV-DL
+5V
IC303 H-DELAY MONO MULTI
D506 SPEED UP
H FREQ DPE
V PHASE DAC
+26V
B+
D517 SW
H SYNC
H AFC
H OSC
H DRIVE
PROT
H DRIVE Q502
T300
H OUT Q501
IC507(3/3) DIFRECTION
PROTECT Q528, 529, 530
CNDD L101, 2 Q500, 511
T501 FBT
HV
FOCUS
IC500 X-RAY PROT
Q533 PROT
+180V
+115V
+15V
+24V
H DL DAC
COMP SYNC
D507 HV-DELAY SW
V IN
VIDEO V
IC502 V-DELAY MONO MULTI
VDL DAC
D509 SW
DIGI V SW Q509
DIGITAL
D364 OR MUTE
RGB SW Q369
D363 DC SHIFT
D362 DC SHIFT
BRIGHT UP SW3 Q368
BRIGHT UP SW2 Q367
BRIGHT UP SW1 Q366
B/W SW2 Q354
IC326 HOLD AMP
Q337 SECAM SW
SECAM SW Q347
SECAM STOP
D324 R-Y C/B BAL ADJ
D326 B-Y C/B BAL ADJ
COL DAC
COL SEL
ID-AT-SW Q346
ID SW Q336
IC303 SECAM DEC
IC304 SYS SW2
CP302 PAL/HV
IC304 SYS SW1
BUFF Q302
IC301 ACC OFF GAME CONT
DPF SW
Q357 ACC OFF
IC801 CAPTION DECODER
OUTPUT LOGIC
PHASE FREQ DET
CLAMP
CN503
DIGITAL OPTION
AUDIO SEL 3
AUDIO SEL 2
AUDIO SEL 1
AUDIO
R-Y
B-Y
Y
V-SYNC
H-SYNC
SFT 2
SFT 1
AUDIO
IC325 AUDIO SEL
IC200 AUDIO OUT
12V REG Q200
DC VOL ATT
AUDIO OUT
+12V
+15V
OSD MUTE
VOL
M. FREQ
CN505
CN504
AF OUT
TO SPEAKER
12V REG Q520
IC505 12V REG

BLOCK DIAGRAMS (2)

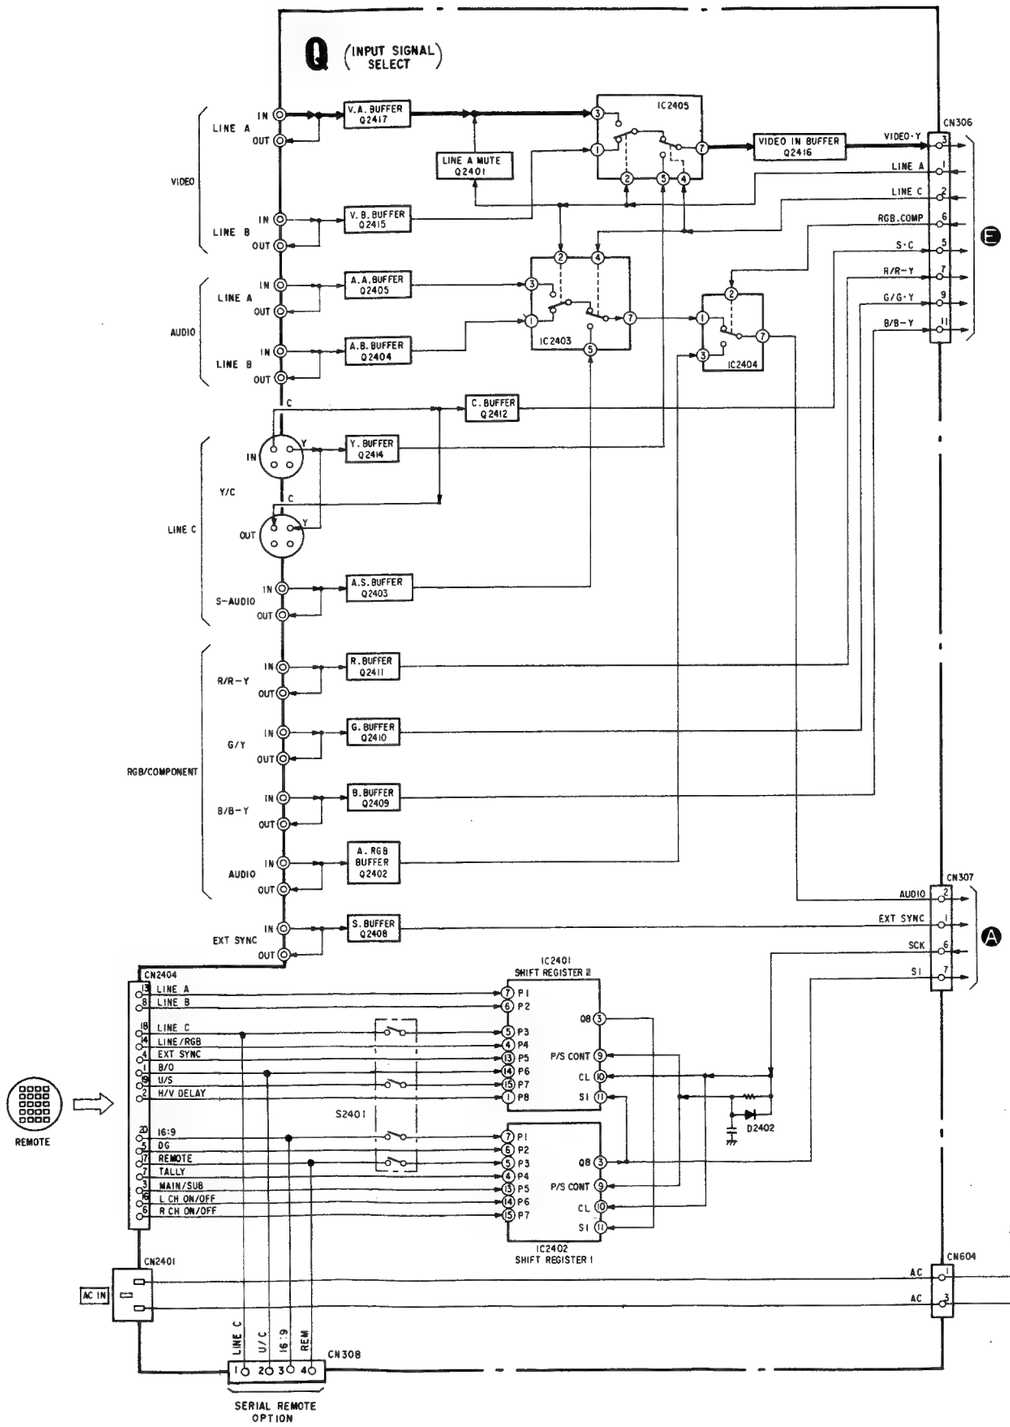

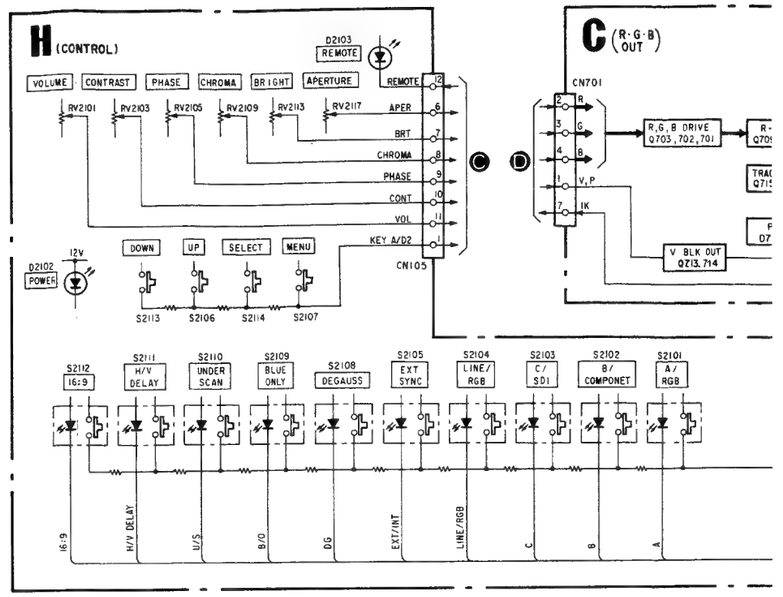

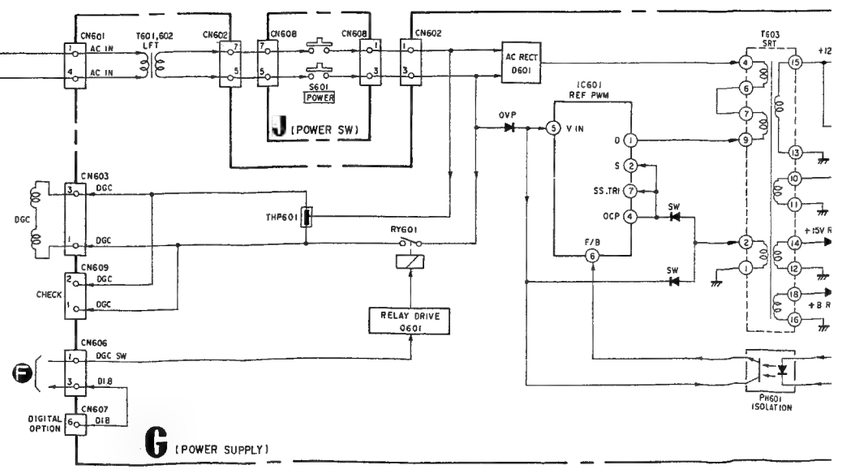

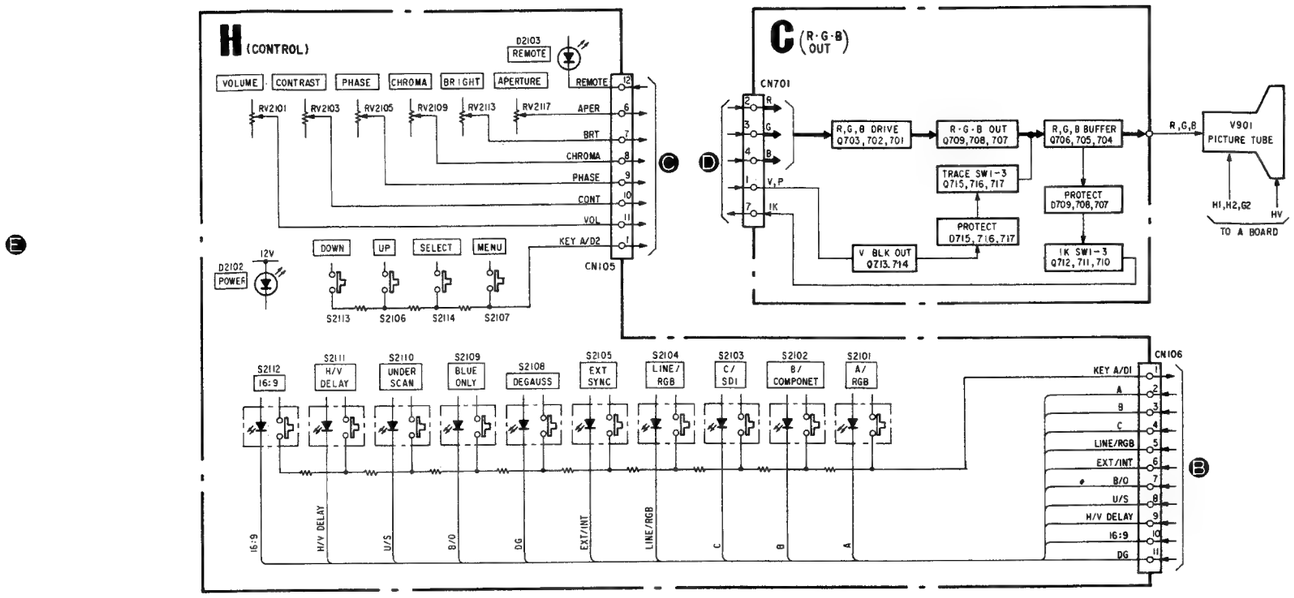
H (CONTROL)
D2103 REMOTE
VOLUME
CONTRAST
PHASE
CHROMA
BRIGHT
APERTURE
REMOTE
RV2101
RV2103
RV2105
RV2109
RV2113
RV2117
APER
BRT
CHROMA
PHASE
CONT
VOL
KEY A/D2
CN105
D2102 POWER
12V
DOWN
UP
SELECT
MENU
S2113
S2106
S2114
S2107
C (R·G·B OUT)
CN701
R
G
B
V,P
IK
R,G,B DRIVE Q703,702,701
R·G·B OUT Q709,708,707
R,G,B BUFFER Q706,705,704
R,G,B
V901 PICTURE TUBE
H1,H2,G2
HV
TO A BOARD
TRACE SW1-3 Q715,716,717
PROTECT D709,708,707
PROTECT D715,716,717
V BLK OUT Q713,714
IK SW1-3 Q712,711,710
S2112 16:9
S2111 H/V DELAY
S2110 UNDER SCAN
S2109 BLUE ONLY
S2108 DEGAUSS
S2105 EXT SYNC.
S2104 LINE/RGB
S2103 C/SDI
S2102 B/COMPONET
S2101 A/RGB
CN106
KEY A/DI
A
B
C
LINE/RGB
EXT/INT
B/O
U/S
H/V DELAY
16:9
DG
16:9
H/V DELAY
U/S
B/O
DG
EXT/INT
LINE/RGB
C
B
A

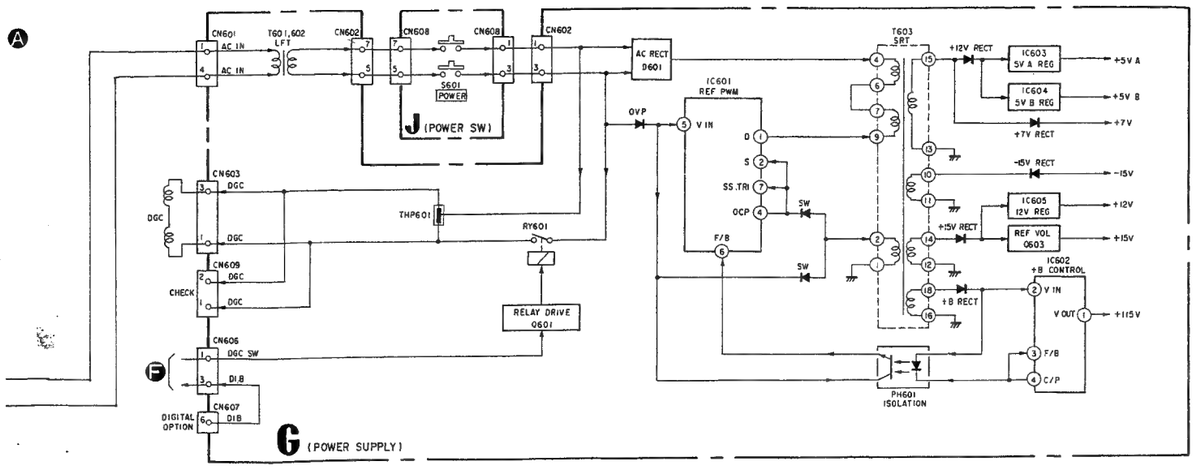
CN601
AC IN
AC IN
T601,602 LFT
CN602
CN608
CN608
CN602
S601 POWER
J (POWER SW)
AC RECT D601
OVP
IC601 REF PWM
V IN
D
S
SS.TRI
OCP
F/B
SW
SW
SW
T603 SMT
+12V RECT
IC603 5V A REG
+5V A
IC604 5V B REG
+5V B
+7V RECT
+7V
-15V RECT
-15V
IC605 12V REG
+12V
+15V RECT
REF VOL 0603
+15V
IC602 +B CONTROL
V IN
V OUT
+11.5V
+B RECT
F/B
C/P
PH601 ISOLATION
CN603
DGC
DGC
DGC
THP601
RY601
CN609
CHECK
DGC
DGC
RELAY DRIVE Q601
CN606
DGC SW
DIB
CN607
DIB
DIGITAL OPTION
G (POWER SUPPLY)

6-2. FRAME SCHEMATIC DIAGRAM

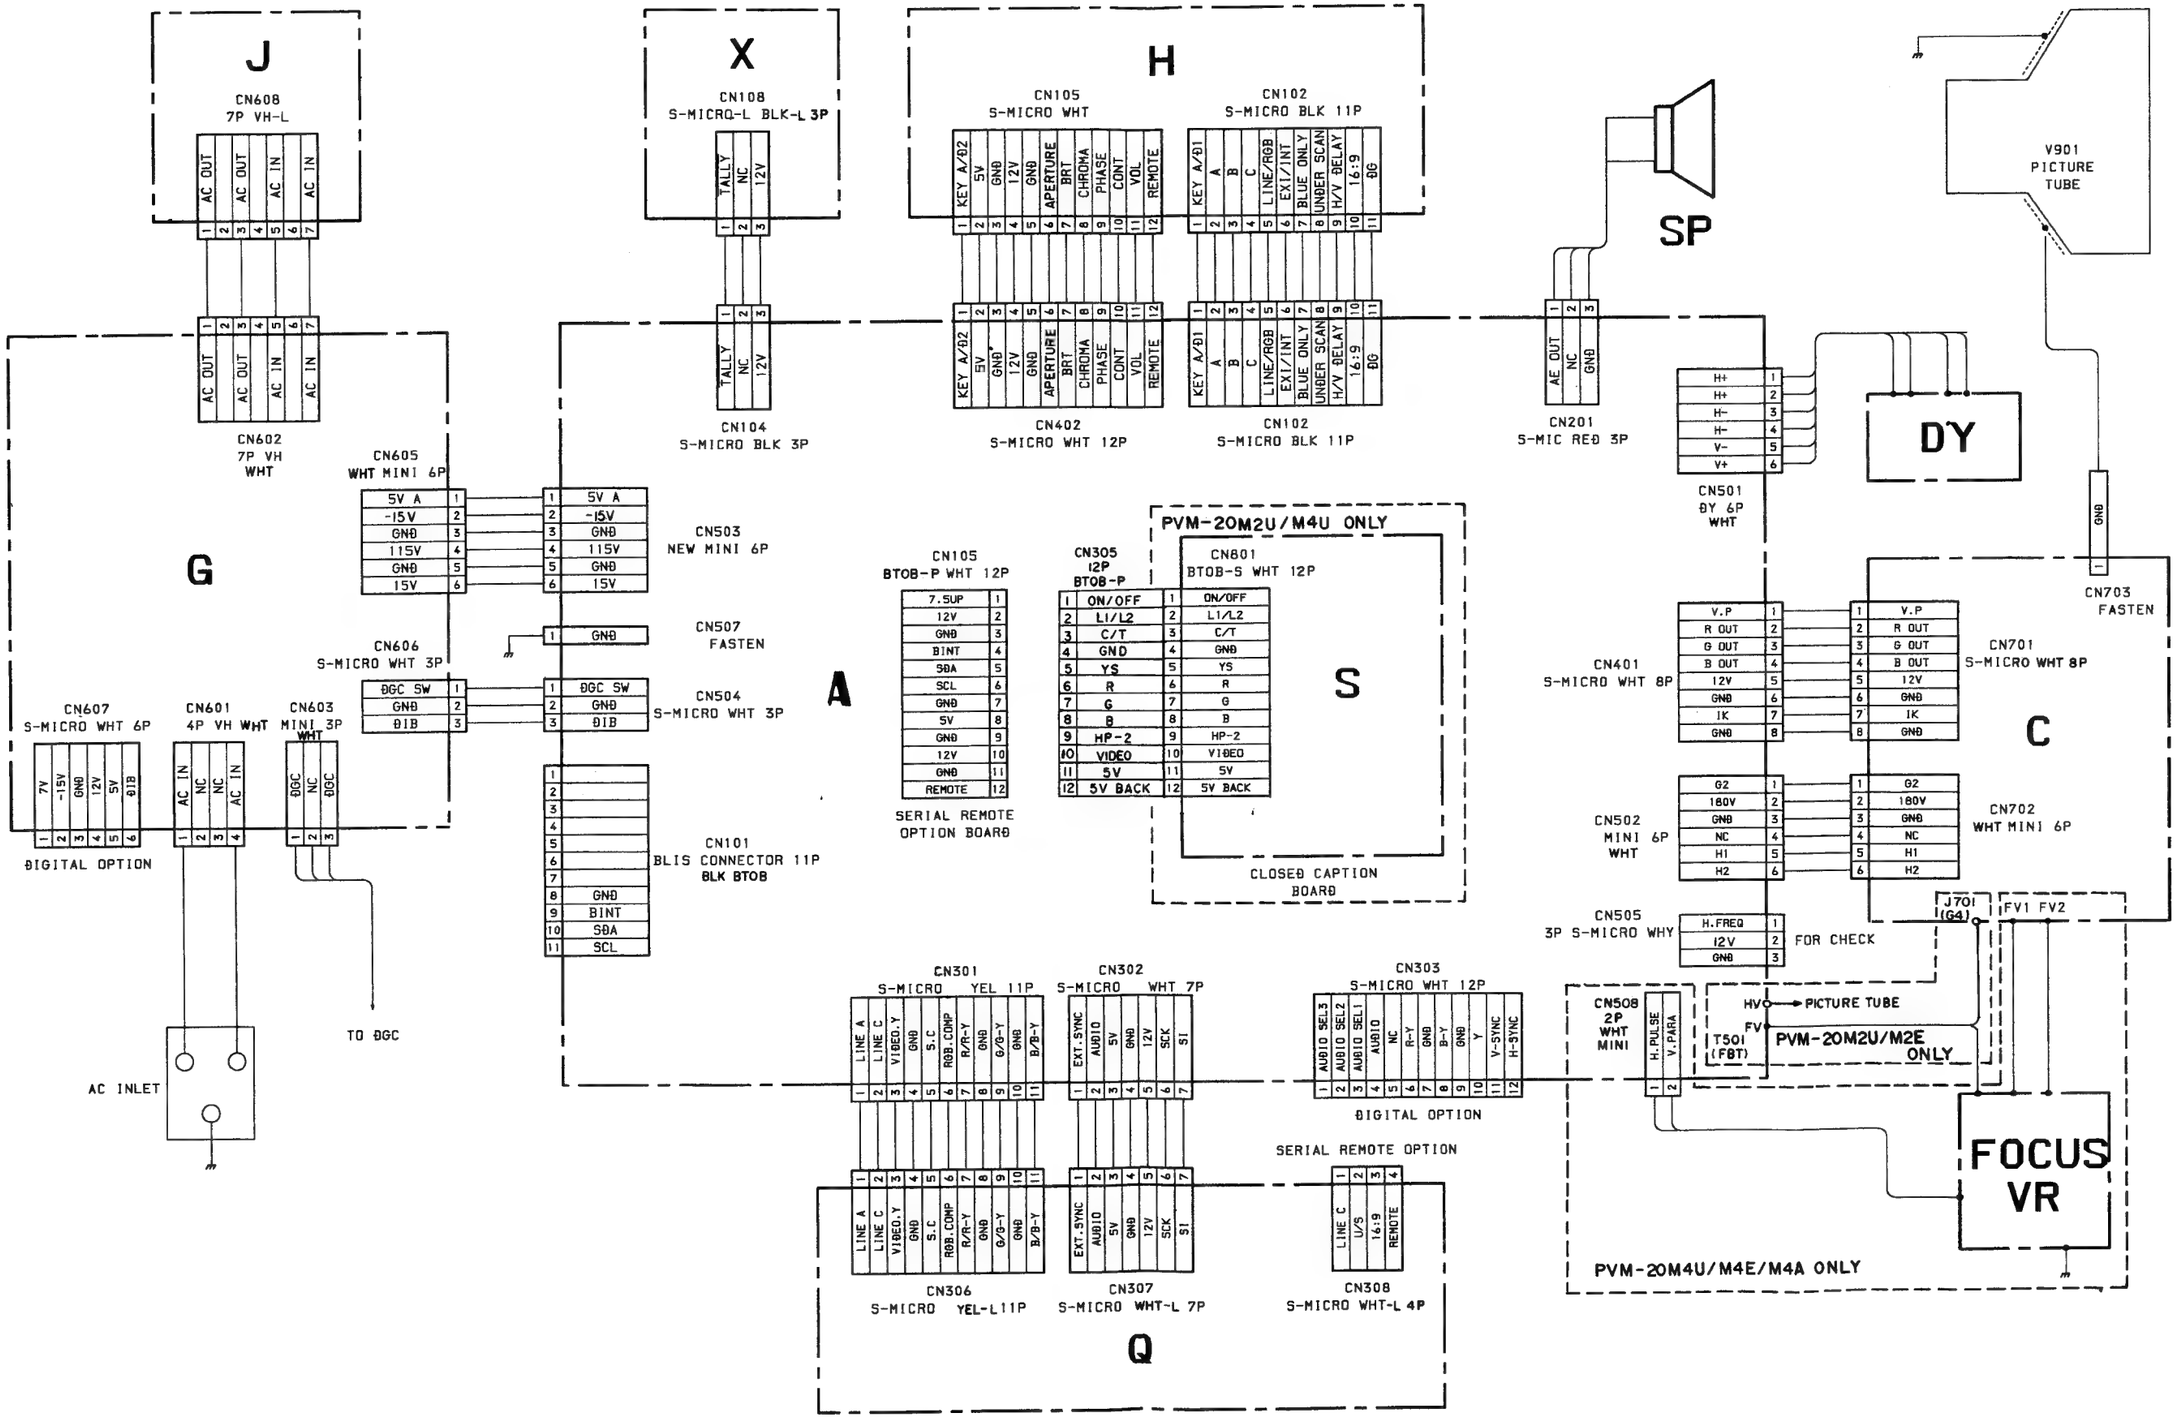

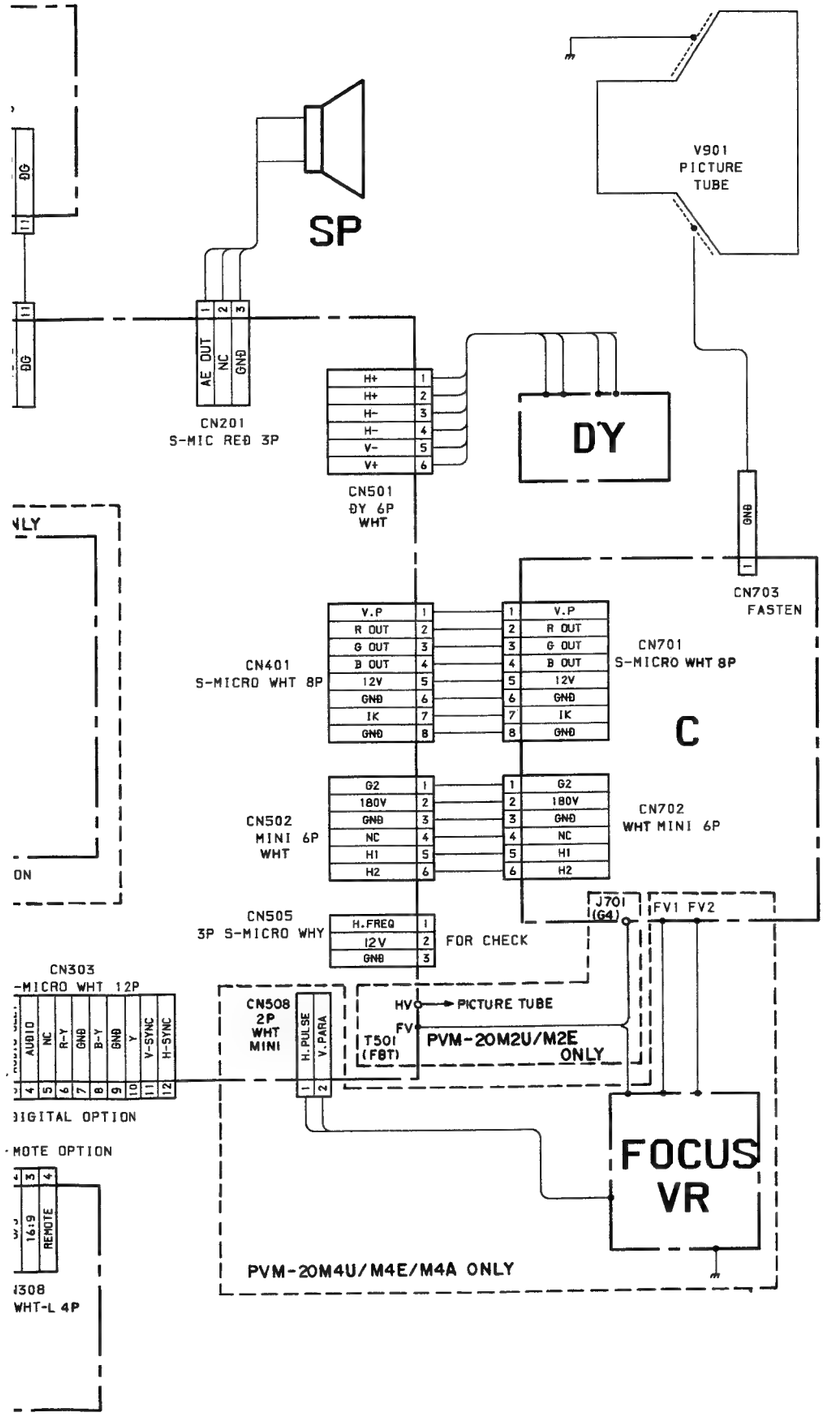

MEMO

6-3. CIRCUIT BOARDS LOC

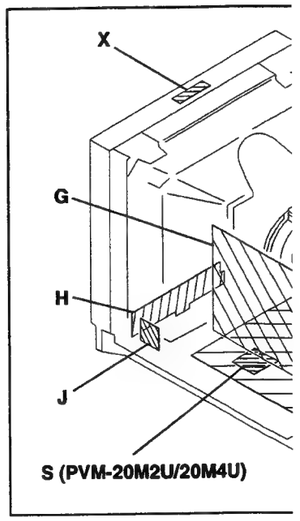

6-4. PRINTED WIRING BOAF

Note:

- All capacitors are in µF unless othe 50 WV or less are not indicated except
- Indication of resistance, which does r electrical power, is as follows.

Pitch: 5 mm
Rating electrical power ¼ W

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- △ : internal component.
- : panel designation, and adjus
- All variable and adjustable resistors h B, unless otherwise noted.
- The components identified by ⊠ ir diagram have been carefully factory-s order to satisfy regulations regarding X- Should replacement be required, repl originally used.
- When replacing components identifie necessary adjustments indicated. If r specified value, change the compone repeat the adjustment until the speci (Refer to R1536 adjust on Page 25 and
- When replacing the part in below table related adjustment.

Part replaced (◪)
C512, C513, C523, C549, C592, D533, IC500, IC507, Q500, Q51 R508, R515, R516, R517, R518, R551, R1537, R1560..... (A E

6-3. CIRCUIT BOARDS LOCATION

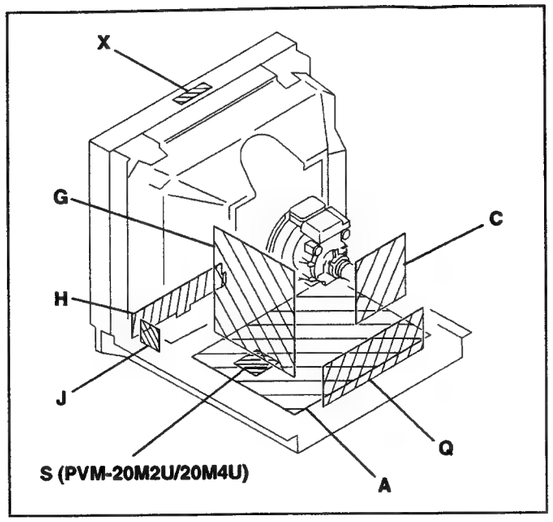

6-4. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50 WV or less are not indicated except for electrolytics.
- Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm Rating electrical power ¼ W

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- △ : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by ▬ in this basic schematic diagram have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- When replacing components identified by ◪, make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by ▬ and repeat the adjustment until the specified value is achieved. (Refer to R1536 adjust on Page 25 and 26.)
- When replacing the part in below table, be sure to perform the related adjustment.

Part replaced (◪)	Adjustment (⧓)
C512, C513, C523, C549, C592, D501, D533, IC500, IC507, Q500, Q511, R506, R508, R515, R516, R517, R518, R519, R551, R1537, R1560····· (A BOARD)	R1536 (HOLD-DOWN)

- All voltages are in V.
- Voltage are dc with respect to ground unless otherwise noted.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- ▬▬ : B + bus.
- ▬ ▬ ▬ : B − bus.
- ▒▒▒ : signal path.
- No mark : with PAL colour-bar signal sreceived or common voltage.
- For the respective voltage ratings in SECAM, NTSC 3.58, NTSC 4.43 S-VIDEO, and ANALOG RGB modes, see the table

Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RW	NONFLAMMABLE WIREWOUND
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

Note: The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par une trame et par une marque ⚠ sont d'une importance critique pour la sécurité. Ne les remplacer que par des pièces de numéro spécifié.

A [MICON, RGB-MATRIX, DAC, ON SCREEN DISPLAY, ON/OFF MUTE, VOL OFF SW, BLACK-SAMPLING, RGB SW] [CHROMA DEMOD, SECAM CHROMA SELECT, SYSTEM SW, SYNC SELECT, B/B-Y SW, R/R-Y SW, G/Y SW, AUDIO SELECT, SECAM DECODER, HOLD AMP] [H/V OUT, DEFLECTION SYSTEM, AUDIO OUT]

A BOARD
(COMPONENT SIDE)

IC

IC101	B–2
IC102	B–2
IC103	C–1
IC104	B–2
IC105	B–3
IC106	C–3
IC107	C–2
IC109	C–3
IC110	C–3
IC111	B–2
IC112	B–2
IC200	A–5
IC301	G–2
IC302	G–3
IC303	E–1
IC304	G–1
IC305	G–2
IC306	F–3
IC309	F–3
IC310	D–3
IC311	E–3
IC312	E–3
IC313	F–2
IC314	G–4
IC315	D–2
IC316	G–5
IC317	D–1
IC318	D–2
IC320	F–5
IC321	F–5
IC322	E–5
IC323	E–5
IC324	E–4
IC325	E–4
IC326	E–2
IC327	C–3
IC350	D–2
IC401	B–4
IC402	D–4
IC403	B–5
IC404	D–4
IC405	C–5
IC406	B–5
IC407	C–5
IC408	C–6
IC409	C–6
IC410	B–5
IC411	B–5
IC412	B–4
IC413	C–4
IC500	G–8
IC502	G–6
IC503	G–6
IC504	C–7
IC505	E–6
IC506	E–6
IC507	D–7
IC508	C–7
IC509	C–8
IC510	E–3
IC511	A–7
IC512	A–8

TRANSISTOR

Q102	C–2
Q103	C–2
Q104	B–2
Q105	A–3
Q107	A–3
Q108	C–2
Q109	A–3
Q110	A–1
Q112	D–6
Q200	A–6
Q300	G–3
Q308	G–3
Q311	G–3
Q314	F–4
Q316	F–5
Q320	E–3
Q324	G–1
Q335	D–1
Q340	F–1
Q341	E–3
Q342	E–3
Q343	E–4
Q346	F–1
Q347	E–2
Q348	E–2
Q353	D–3
Q354	E–3
Q355	F–5
Q356	D–2
Q357	G–2
Q358	G–1
Q359	G–1
Q360	D–2
Q362	D–3
Q365	E–3
Q366	E–3
Q372	C–3
Q373	C–3
Q374	C–3
Q404	B–5
Q406	B–5
Q408	B–5
Q410	D–4
Q411	B–5
Q412	C–5
Q413	C–5
Q414	D–5
Q415	D–5
Q416	D–5
Q425	D–5
Q426	D–6
Q429	C–5
Q430	D–6
Q432	C–5
Q433	C–4
Q435	D–4
Q436	D–4
Q437	D–4
Q438	C–5
Q440	C–4
Q441	C–4
Q442	C–4
Q445	C–5
Q446	C–5
Q447	B–4
Q449	D–3
Q501	D–9
Q502	D–8
Q503	B–7
Q512	A–10
Q513	A–9
Q515	A–8
Q518	B–7
Q520	B–7
Q523	B–6
Q524	A–6
Q525	A–6
Q526	G–6
Q527	E–10
Q528	A–8
Q532	G–8

DIODE

D100	D–5
D104	B–1
D105	B–1
D106	B–4
D108	E–5
D109	A–1
D110	E–5
D112	A–1
D114	F–2
D300	G–2
D301	D–2
D305	G–3
D308	F–2
D313	G–5
D314	C–1
D327	D–3
D332	E–3
D335	F–1
D336	F–1
D338	E–3
D339	E–2
D360	C–3
D361	C–3
D362	E–2
D365	G–4
D381	D–2
D406	C–1
D413	E–5
D414	D–4
D415	D–5
D416	D–4
D417	D–4
D418	D–4
D423	C–6
D424	B–5
D502	E–9
D504	D–9
D505	E–10
D506	D–9
D510	F–6
D512	D–9
D514	E–7
D515	F–10
D520	E–6
D521	C–6
D522	D–6
D524	C–8
D525	C–9
D527	B–8
D528	A–10
D529	A–8
D530	A–10
D533	G–8
D535	B–6
D537	A–7
D538	D–6
D540	E–6
D541	F–3
D543	G–6
D544	F–6
D545	G–6
D546	E–10
D548	G–8

VARIABLE RESISTOR

RV501	B–9

–A BOARD– <Component Side>

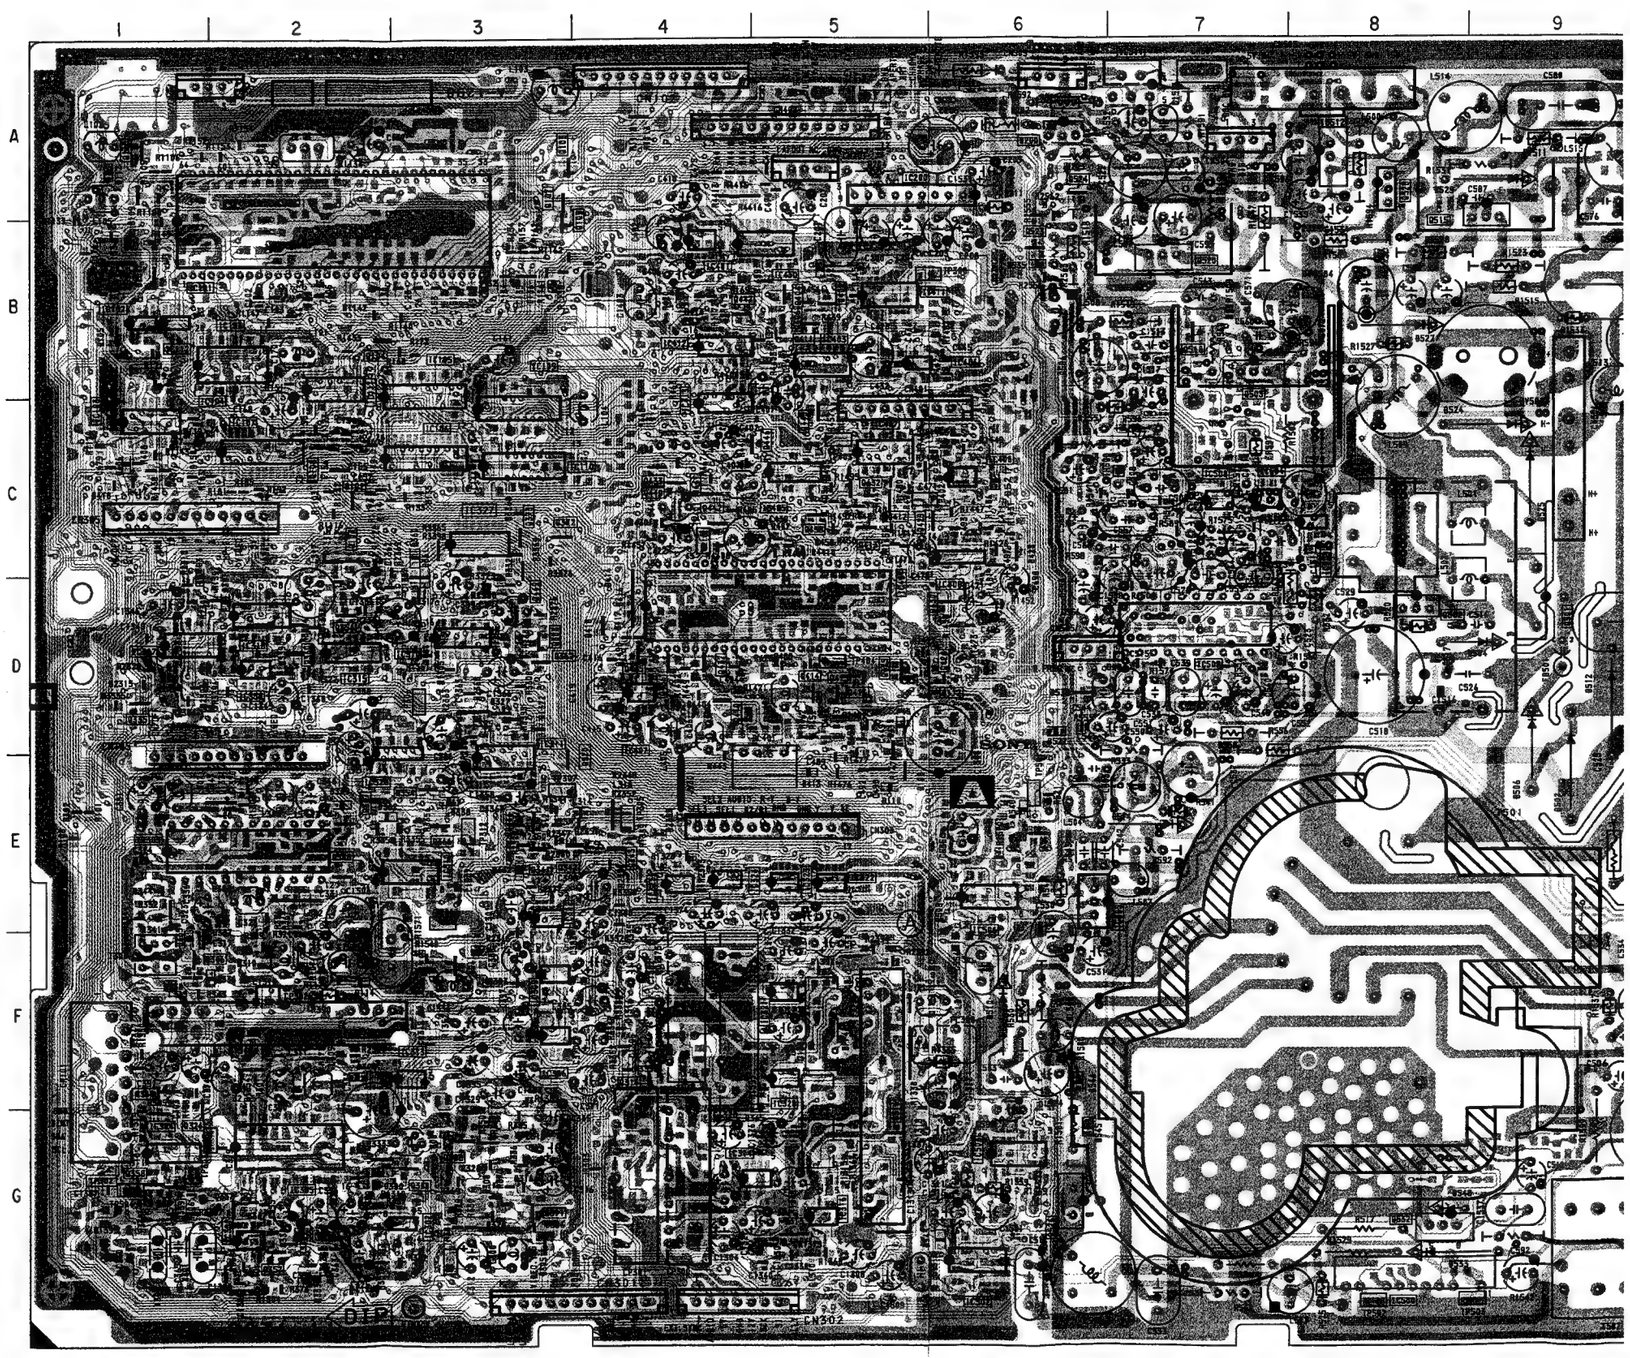

YSTEM,]

• : Pattern from the side which enables seeing.
• : Pattern of the rear side.

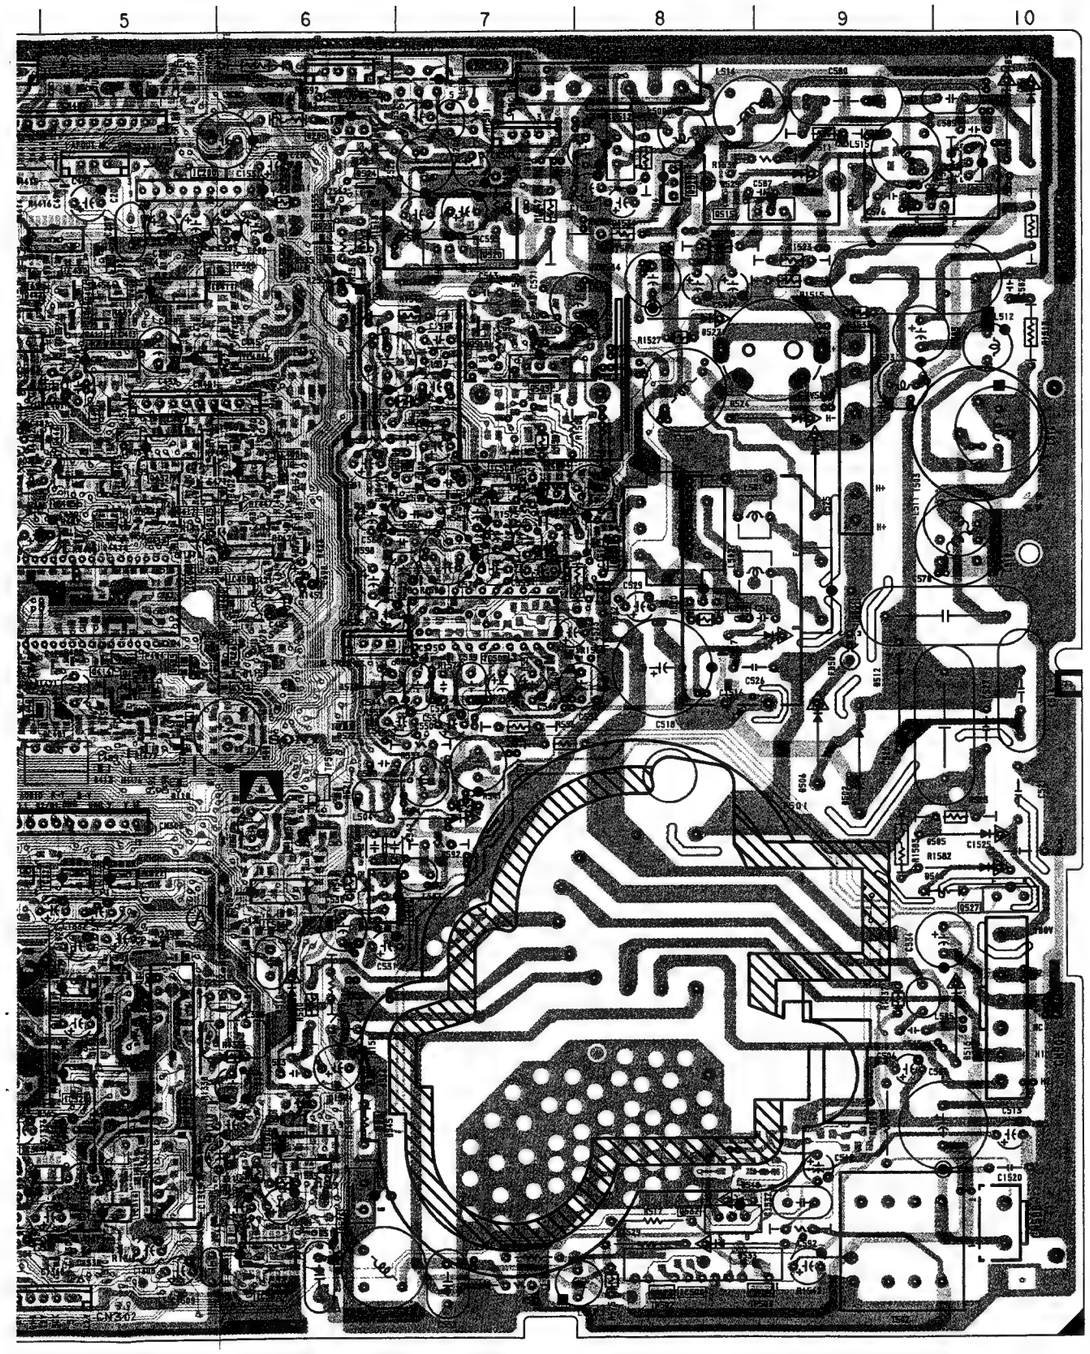

A BOARD
(CONDUCTOR SIDE)

IC		TRANSISTOR						DIODE				VARIABLE RESISTOR	
IC101	A–9	Q101	A–9	Q405	C–6	Q517	C–4	D101	B–10	D322	D–9	RV501	B–2
IC108	B–8	Q111	C–10	Q407	C–7	Q519	C–3	D102	B–9	D323	C–9		
IC200	A–5	Q113	A–7	Q409	D–7	Q520	B–4	D103	B–9	D324	E–9		
IC303	E–9	Q114	A–8	Q417	C–5	Q522	E–5	D107	B–9	D325	D–8		
IC404	D–6	Q200	A–5	Q418	B–5	Q525	A–4	D111	B–9	D326	E–9		
IC500	G–3	Q201	A–5	Q419	C–6	Q526	G–4	D115	B–9	D333	C–9		
IC505	E–4	Q301	G–8	Q420	C–6	Q527	E–1	D116	G–2	D337	E–8		
IC507	D–4	Q302	G–10	Q421	B–5	Q528	A–3	D200	A–4	D344	D–8		
IC511	A–4	Q303	G–6	Q422	B–5	Q529	D–3	D301	G–8	D345	E–7		
IC512	A–3	Q305	G–8	Q423	C–5	Q530	D–4	D303	F–7	D346	E–7		
		Q306	G–7	Q424	C–5	Q531	G–2	D304	G–7	D347	E–7		
		Q307	G–8	Q428	D–6	Q532	G–2	D307	G–8	D363	E–8		
		Q309	G–8	Q431	B–5	Q2501	C–4	D309	G–8	D364	E–8		
		Q310	G–7	Q434	C–5			D310	G–8	D401	B–7		
		Q312	G–8	Q439	C–6			D311	G–9	D402	B–7		
		Q313	G–8	Q444	B–5			D315	E–8	D404	D–6		
		Q315	G–8	Q448	F–9			D317	D–9	D405	B–5		
		Q318	G–7	Q500	G–2			D320	D–9	D407	D–7		
		Q319	F–7	Q501	D–2					D410	C–5		
		Q321	G–8	Q502	D–3					D411	B–6		
		Q322	G–6	Q503	B–3					D421	C–5		
		Q323	G–10	Q505	E–5					D422	C–5		
		Q325	F–8	Q506	B–4					D425	C–5		
		Q326	F–6	Q507	E–5					D427	B–6		
		Q327	F–6	Q508	C–4					D500	G–5		
		Q328	G–9	Q509	G–5					D501	G–2		
		Q329	G–9	Q510	C–4					D502	E–2		
		Q330	F–9	Q511	G–2					D503	D–2		
		Q331	F–9	Q512	A–1					D504	D–2		
		Q332	G–10	Q513	A–1					D505	E–1		
		Q333	D–9	Q514	B–4					D506	E–2		
		Q334	F–9	Q515	B–2					D507	G–5		
		Q336	E–10	Q516	C–4					D508	F–5		
		Q338	C–8							D509	G–5		
		Q339	D–8							D510	F–5		
		Q345	D–8							D511	E–5		
		Q349	E–9							D512	D–2		
		Q350	D–8							D513	E–5		
		Q351	D–8							D514	E–4		
		Q352	D–8							D515	F–1		
		Q355	F–5							D516	F–5		
		Q361	F–8							D517	E–4		
		Q363	G–9							D518	E–5		
		Q364	D–8							D519	C–4		
		Q367	E–8							D523	A–2		
		Q368	E–8							D524	C–2		
		Q369	E–8							D525	C–2		
		Q375	D–8							D526	B–4		
		Q401	B–6							D527	B–3		
		Q402	B–6							D528	A–1		
		Q403	B–6							D529	A–2		
										D530	A–1		
										D531	B–4		
										D532	B–4		
										D533	G–2		
										D534	B–4		
										D536	A–5		
										D542	B–4		
										D546	E–1		
										D547	D–4		
										D548	G–2		

–A BOARD– <Conductor Side>

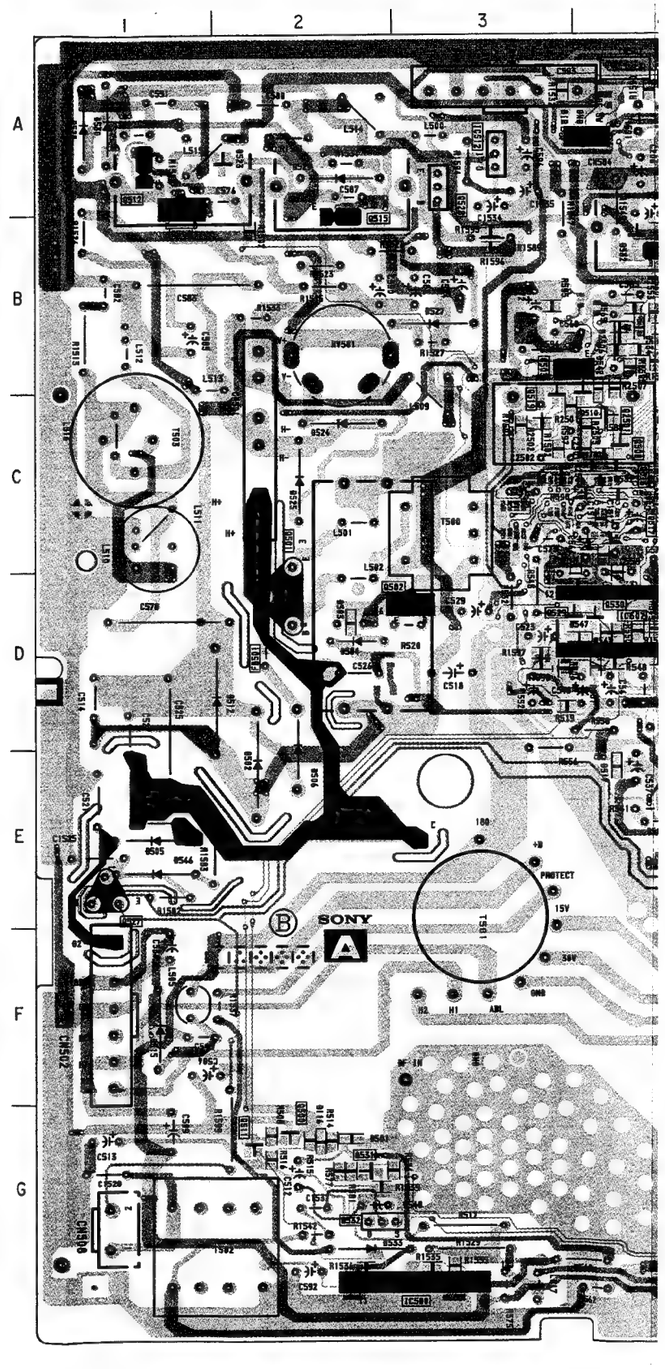

A BOARD (CONDUCTOR SIDE)

IC	
IC101	A–9
IC108	B–8
IC200	A–5
IC303	E–9
IC404	D–6
IC500	G–3
IC505	E–4
IC507	D–4
IC511	A–4
IC512	A–3

TRANSISTOR	
Q101	A–9
Q111	C–10
Q113	A–7
Q114	A–8
Q200	A–5
Q201	A–5
Q301	G–8
Q302	G–10
Q303	G–6
Q305	G–8
Q306	G–7
Q307	G–8
Q309	G–8
Q310	G–7
Q312	G–8
Q313	G–8
Q315	G–8
Q318	G–7
Q319	F–7
Q321	G–8
Q322	G–6
Q323	G–10
Q325	F–8
Q326	F–6
Q327	F–6
Q328	G–9
Q329	G–9
Q330	F–9
Q331	F–9
Q332	G–10
Q333	D–9
Q334	F–9
Q336	E–10
Q338	C–8
Q339	D–8
Q345	D–8
Q349	E–9
Q350	D–8
Q351	D–8
Q352	D–8
Q355	F–5
Q361	F–8
Q363	G–9
Q364	D–8
Q367	E–8
Q368	E–8
Q369	E–8
Q375	D–8
Q401	B–6
Q402	B–6
Q403	B–6
Q405	C–6
Q407	C–7
Q409	D–7
Q417	C–5
Q418	B–5
Q419	C–6
Q420	C–6
Q421	B–5
Q422	B–5
Q423	C–5
Q424	C–5
Q428	D–6
Q431	B–5
Q434	C–5
Q439	C–6
Q444	B–5
Q448	F–9
Q500	G–2
Q501	D–2
Q502	D–3
Q503	B–3
Q505	E–5
Q506	B–4
Q507	E–5
Q508	C–4
Q509	G–5
Q510	C–4
Q511	G–2
Q512	A–1
Q513	A–1
Q514	B–4
Q515	B–2
Q516	C–4
Q517	C–4
Q519	C–3
Q520	B–4
Q522	E–5
Q525	A–4
Q526	G–4
Q527	E–1
Q528	A–3
Q529	D–3
Q530	D–4
Q531	G–2
Q532	G–2
Q2501	C–4

DIODE	
D101	B–10
D102	B–9
D103	B–9
D107	B–9
D111	B–9
D115	B–9
D116	G–2
D200	A–4
D301	G–8
D303	F–7
D304	G–7
D307	G–8
D309	G–8
D310	G–8
D311	G–9
D315	E–8
D317	D–9
D320	D–9
D322	D–9
D323	C–9
D324	E–9
D325	D–8
D326	E–9
D333	C–9
D337	E–8
D344	D–8
D345	E–7
D346	E–7
D347	E–7
D363	E–8
D364	E–8
D401	B–7
D402	B–7
D404	D–6
D405	B–5
D407	D–7
D410	C–5
D411	B–6
D421	C–5
D422	C–5
D425	C–5
D427	B–6
D500	G–5
D501	G–2
D502	E–2
D503	D–2
D504	D–2
D505	E–1
D506	E–2
D507	G–5
D508	F–5
D509	G–5
D510	F–5
D511	E–5
D512	D–2
D513	E–5
D514	E–4
D515	F–1
D516	F–5
D517	E–4
D518	E–5
D519	C–4
D523	A–2
D524	C–2
D525	C–2
D526	B–4
D527	B–3
D528	A–1
D529	A–2
D530	A–1
D531	B–4
D532	B–4
D533	G–2
D534	B–4
D536	A–5
D542	B–4
D546	E–1
D547	D–4
D548	G–2

VARIABLE RESISTOR	
RV501	B–2

NOTE:
The circuit indicated as left contains high voltage of over 600 Vp-p. Care must be paid to prevent an electric shock in inspection or repairing.

• : Pattern from the side which enables seeing.
• : Pattern of the rear side.

–A BOARD– <Conductor Side>

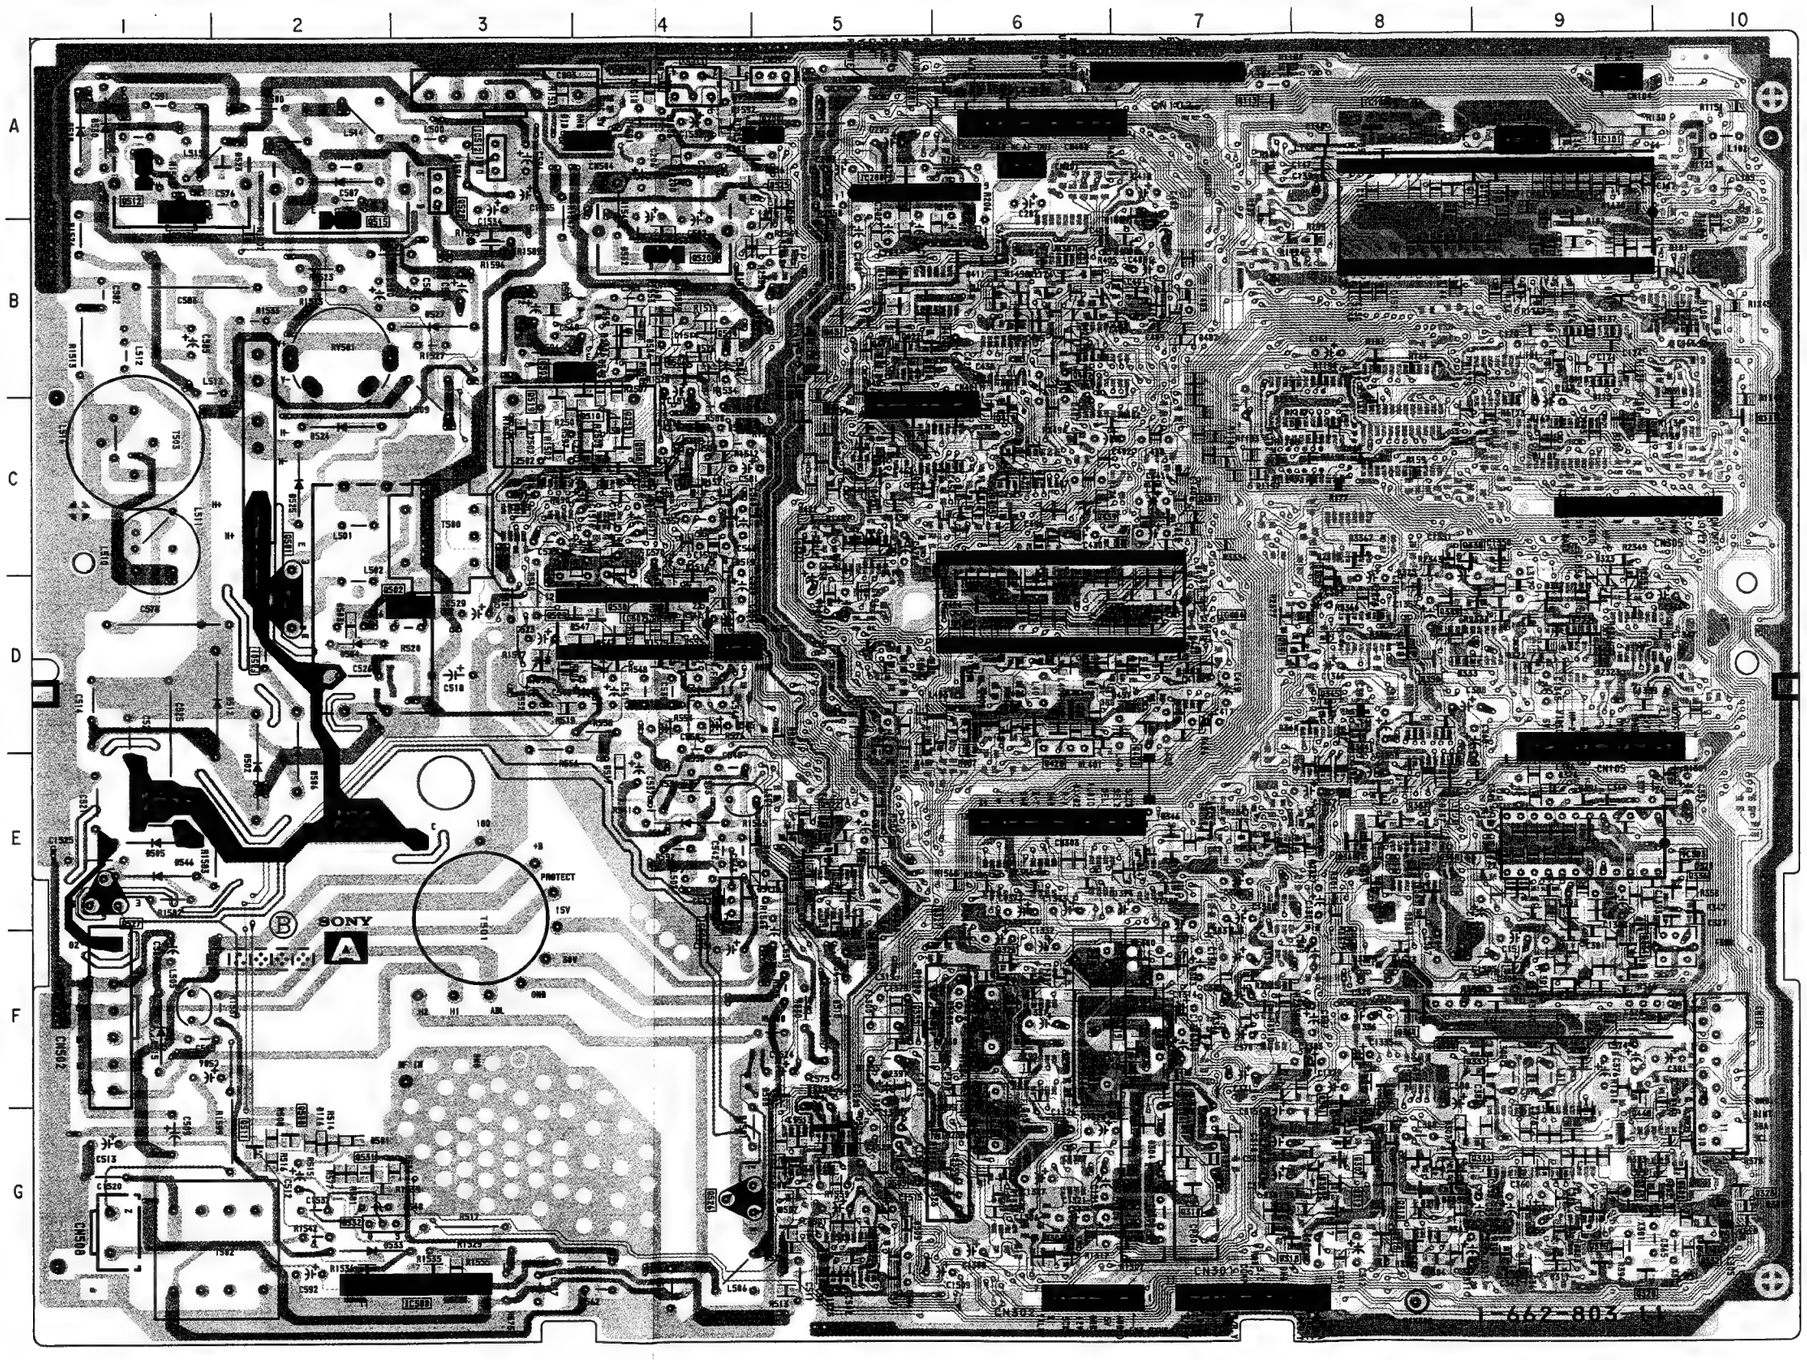

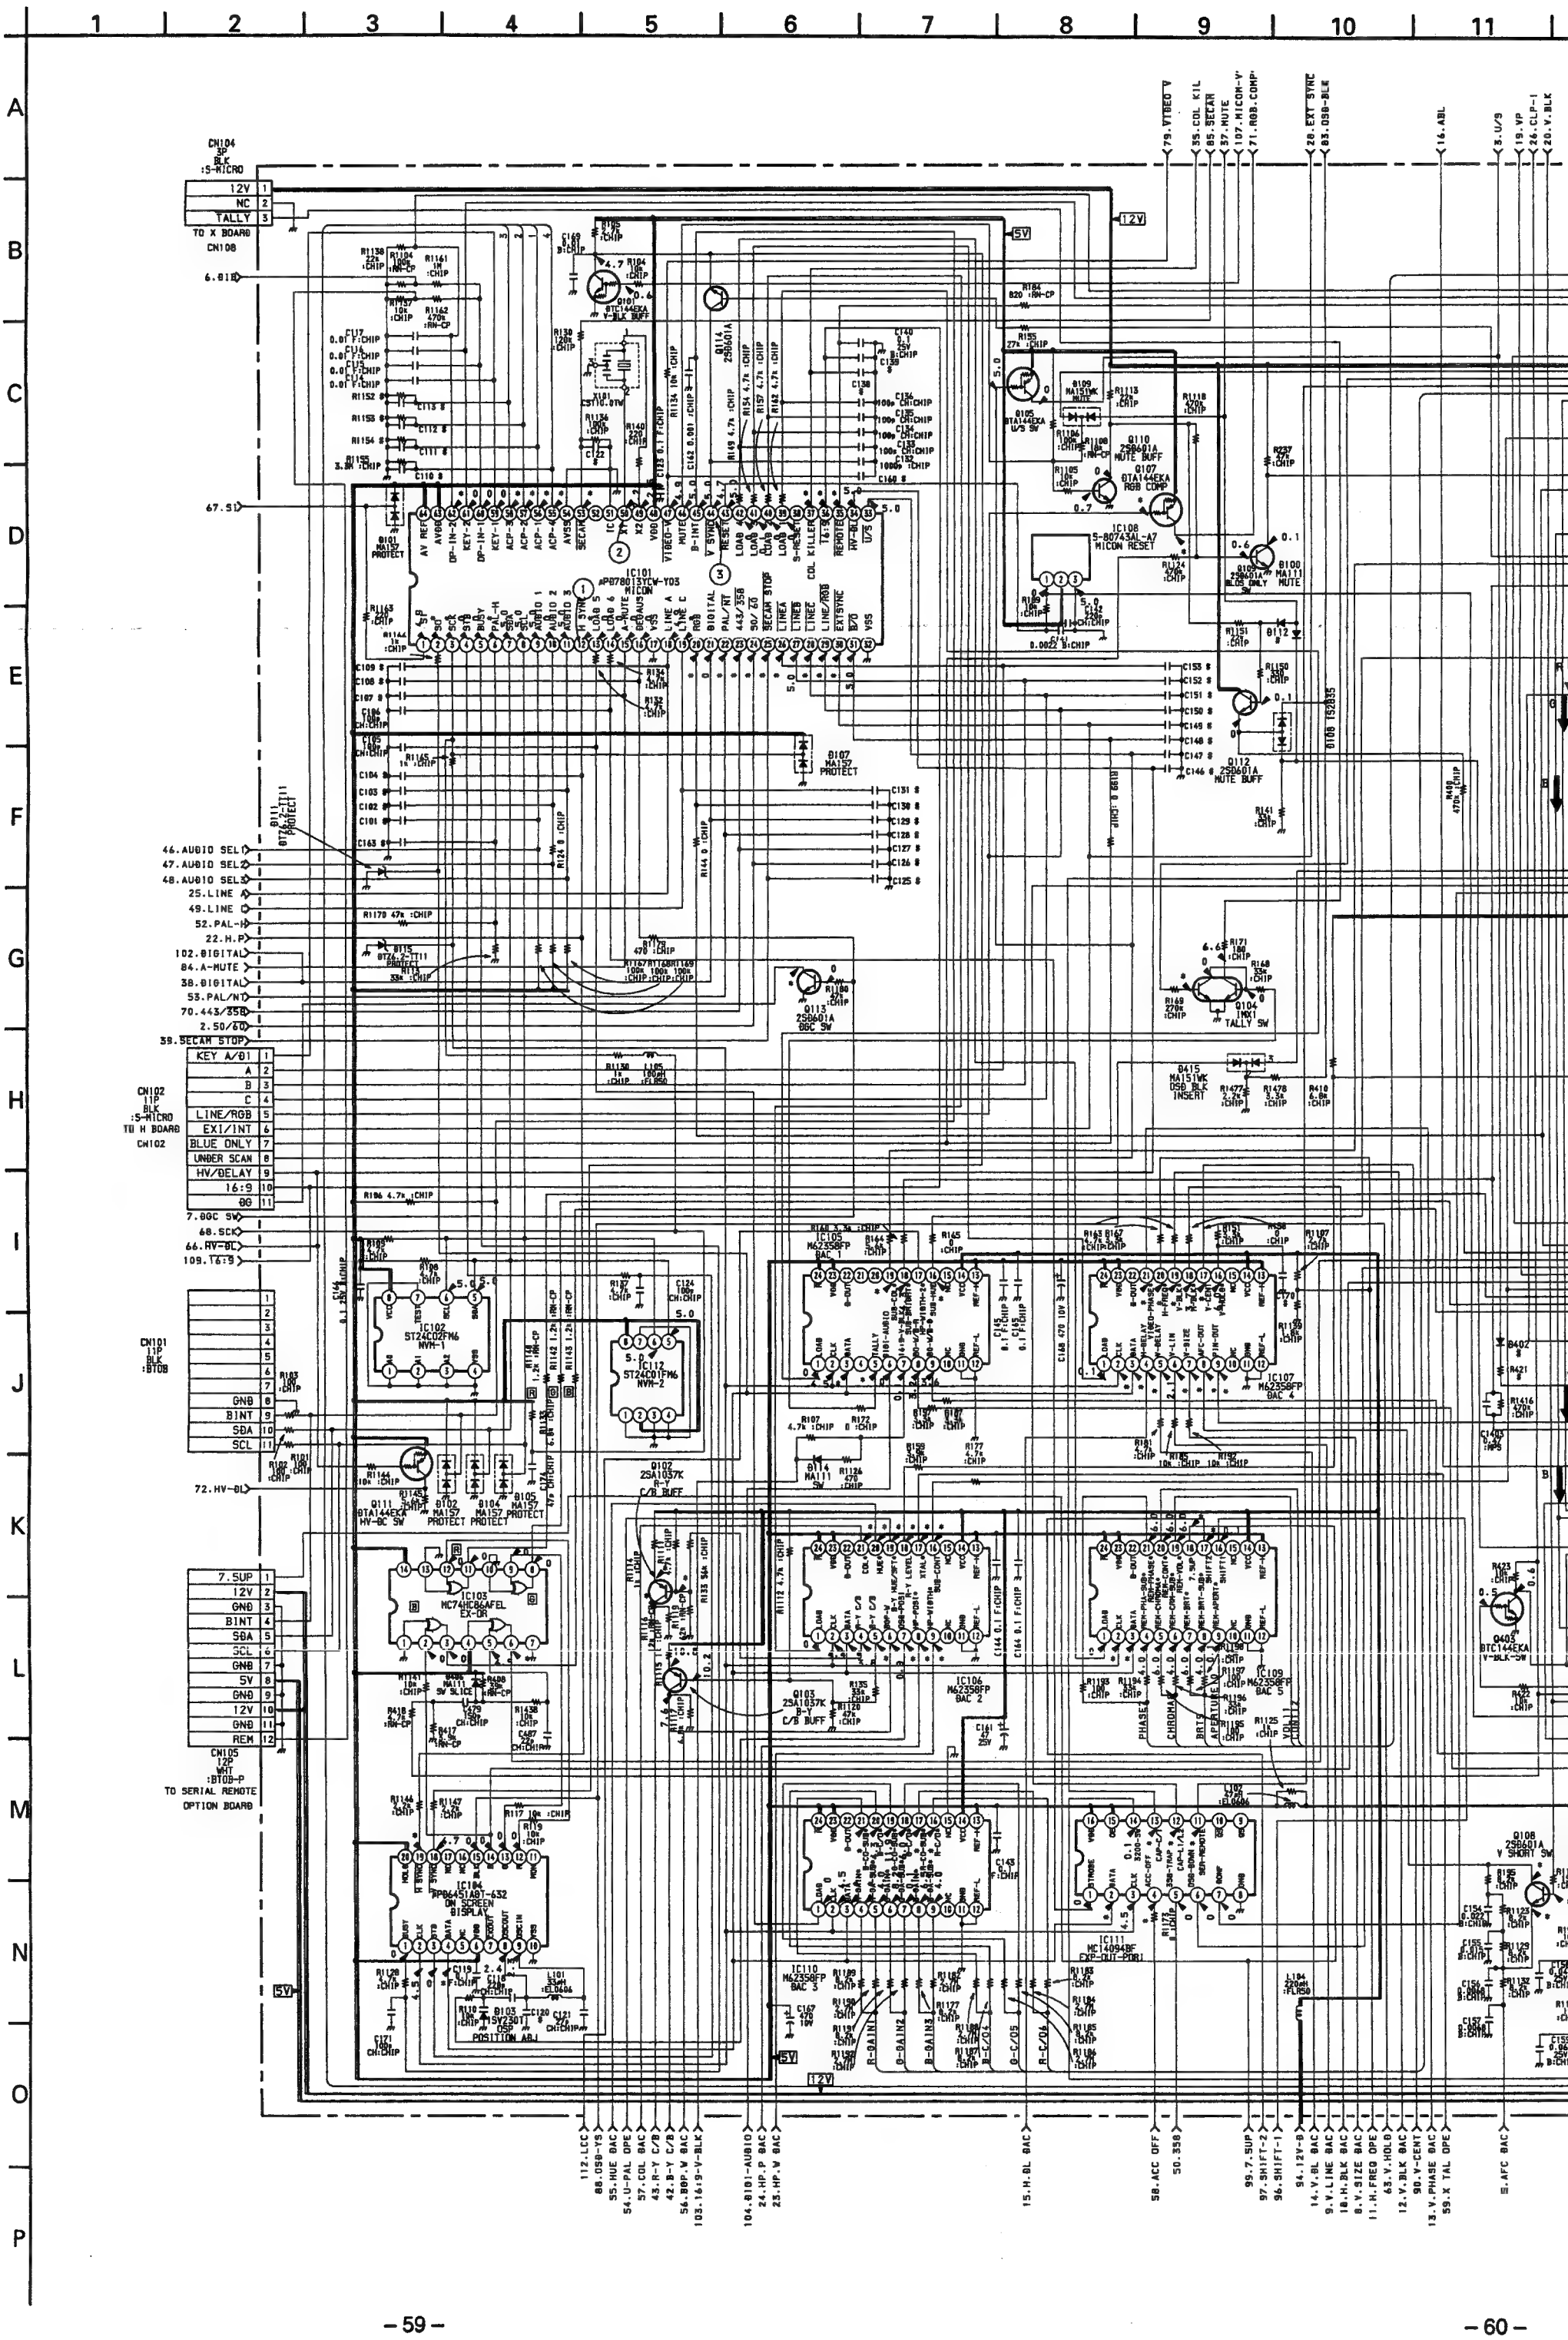
CN104 3P BLK :S-MICRO
12V 1
NC 2
TALLY 3
TO X BOARD CN108
IC101 μPD78013YCW-Y03 MICON
IC102 ST24C02FM6 NVM-1
IC112 ST24C01FM6 NVM-2
IC103 MC74HC86AFEL EX-OR
IC104 SPD6451A8T-632 ON SCREEN DISPLAY
IC105 M62358FP DAC 1
IC106 M62358FP DAC 2
IC107 M62358FP DAC 4
IC108 S-80743AL-A7 MICON RESET
IC109 M62358FP DAC 5
IC110 M62358FP DAC
IC111 MC14094BF EXP-OUT-PORT
CN102 11P BLK :S-MICRO TO H BOARD CN102
KEY A/D1
A
B
C
LINE/RGB
EXT/INT
BLUE ONLY
UNDER SCAN
HV/DELAY
16:9
DG
CN101 11P BLK :BTOB
GND
BINT
SDA
SCL
CN105 12P WHT :BTOB-P TO SERIAL REMOTE OPTION BOARD
7.5UP
12V
GND
BINT
SDA
SCL
GND
5V
GND
12V
GND
REM
Q101 DTC144EKA V-BLK BUFF
Q102 2SA1037K R-Y C/B BUFF
Q103 2SA1037K B-Y C/B BUFF
Q104 IMX1 TALLY SW
Q105 DTA144EKA U/S SW
Q107 DTA144EKA RGB COMP
Q108 2SB601A V SHORT SW
Q109 MA151WK MUTE
Q110 2SB601A MUTE BUFF
Q111 DTA144EKA HV-DC SW
Q112 2SB601A MUTE BUFF
Q113 2SB601A DC SW
Q114 2SB601A
Q403 DTC144EKA V-BLK-SW
D101 MA157 PROTECT
D102 MA157 PROTECT
D103 MA157 PROTECT
D104 MA157 PROTECT
D105 MA157 PROTECT
D107 MA157 PROTECT
D111 DTZ6.2-TT11 PROTECT
D112 MA111
D113 MA111 SW SLICE
D114 MA111 SW
D115 DTZ6.2-TT11 PROTECT
D415 MA151WK OSD BLK INSERT
L101 L105 L184 L185 L186
X101 CSTC.01M
79.VIDEO-V
35.COL KIL
85.SECAM
57.MUTE
107.MICOM-V
71.RGB.COMP
28.EXT SYNC
83.OSD-BLK
16.ABL
3.U/S
19.VP
26.CLP-I
20.V.BLK
46.AUDIO SEL1
47.AUDIO SEL2
48.AUDIO SEL3
25.LINE A
49.LINE B
52.PAL-H
22.H.P
102.DIGITAL
84.A-MUTE
38.DIGITAL
53.PAL/NT
70.443/358
2.50/60
39.SECAM STOP
7.DGC SW
68.SCK
66.HV-DL
109.16:9
72.HV-DL
112.LCC
88.OSD-YS
55.HUE DAC
54.U-PAL DPE
57.COL DAC
43.R-Y C/B
42.B-Y C/B
56.BPP.W DAC
103.16:9-V-BLK
104.DIGITAL-AUDIO
24.HP.P DAC
25.HP.W DAC
15.H.DL DAC
58.ACC OFF
50.35H
99.7.SUP
97.SHIFT-2
96.SHIFT-1
94.12V-B
14.V.DL DAC
9.V.LINE DAC
18.H.BLK DAC
8.V.SIZE DAC
11.H.FREQ DPE
63.V.HOLD
12.V.BLK DAC
90.V-CENT
13.V.PHASE DAC
59.X TAL DPE
5.AFC DAC
R-DAIN1
G-DAIN2
B-DAIN3
R-C/O4
G-C/O5
R-C/O6
5V
12V

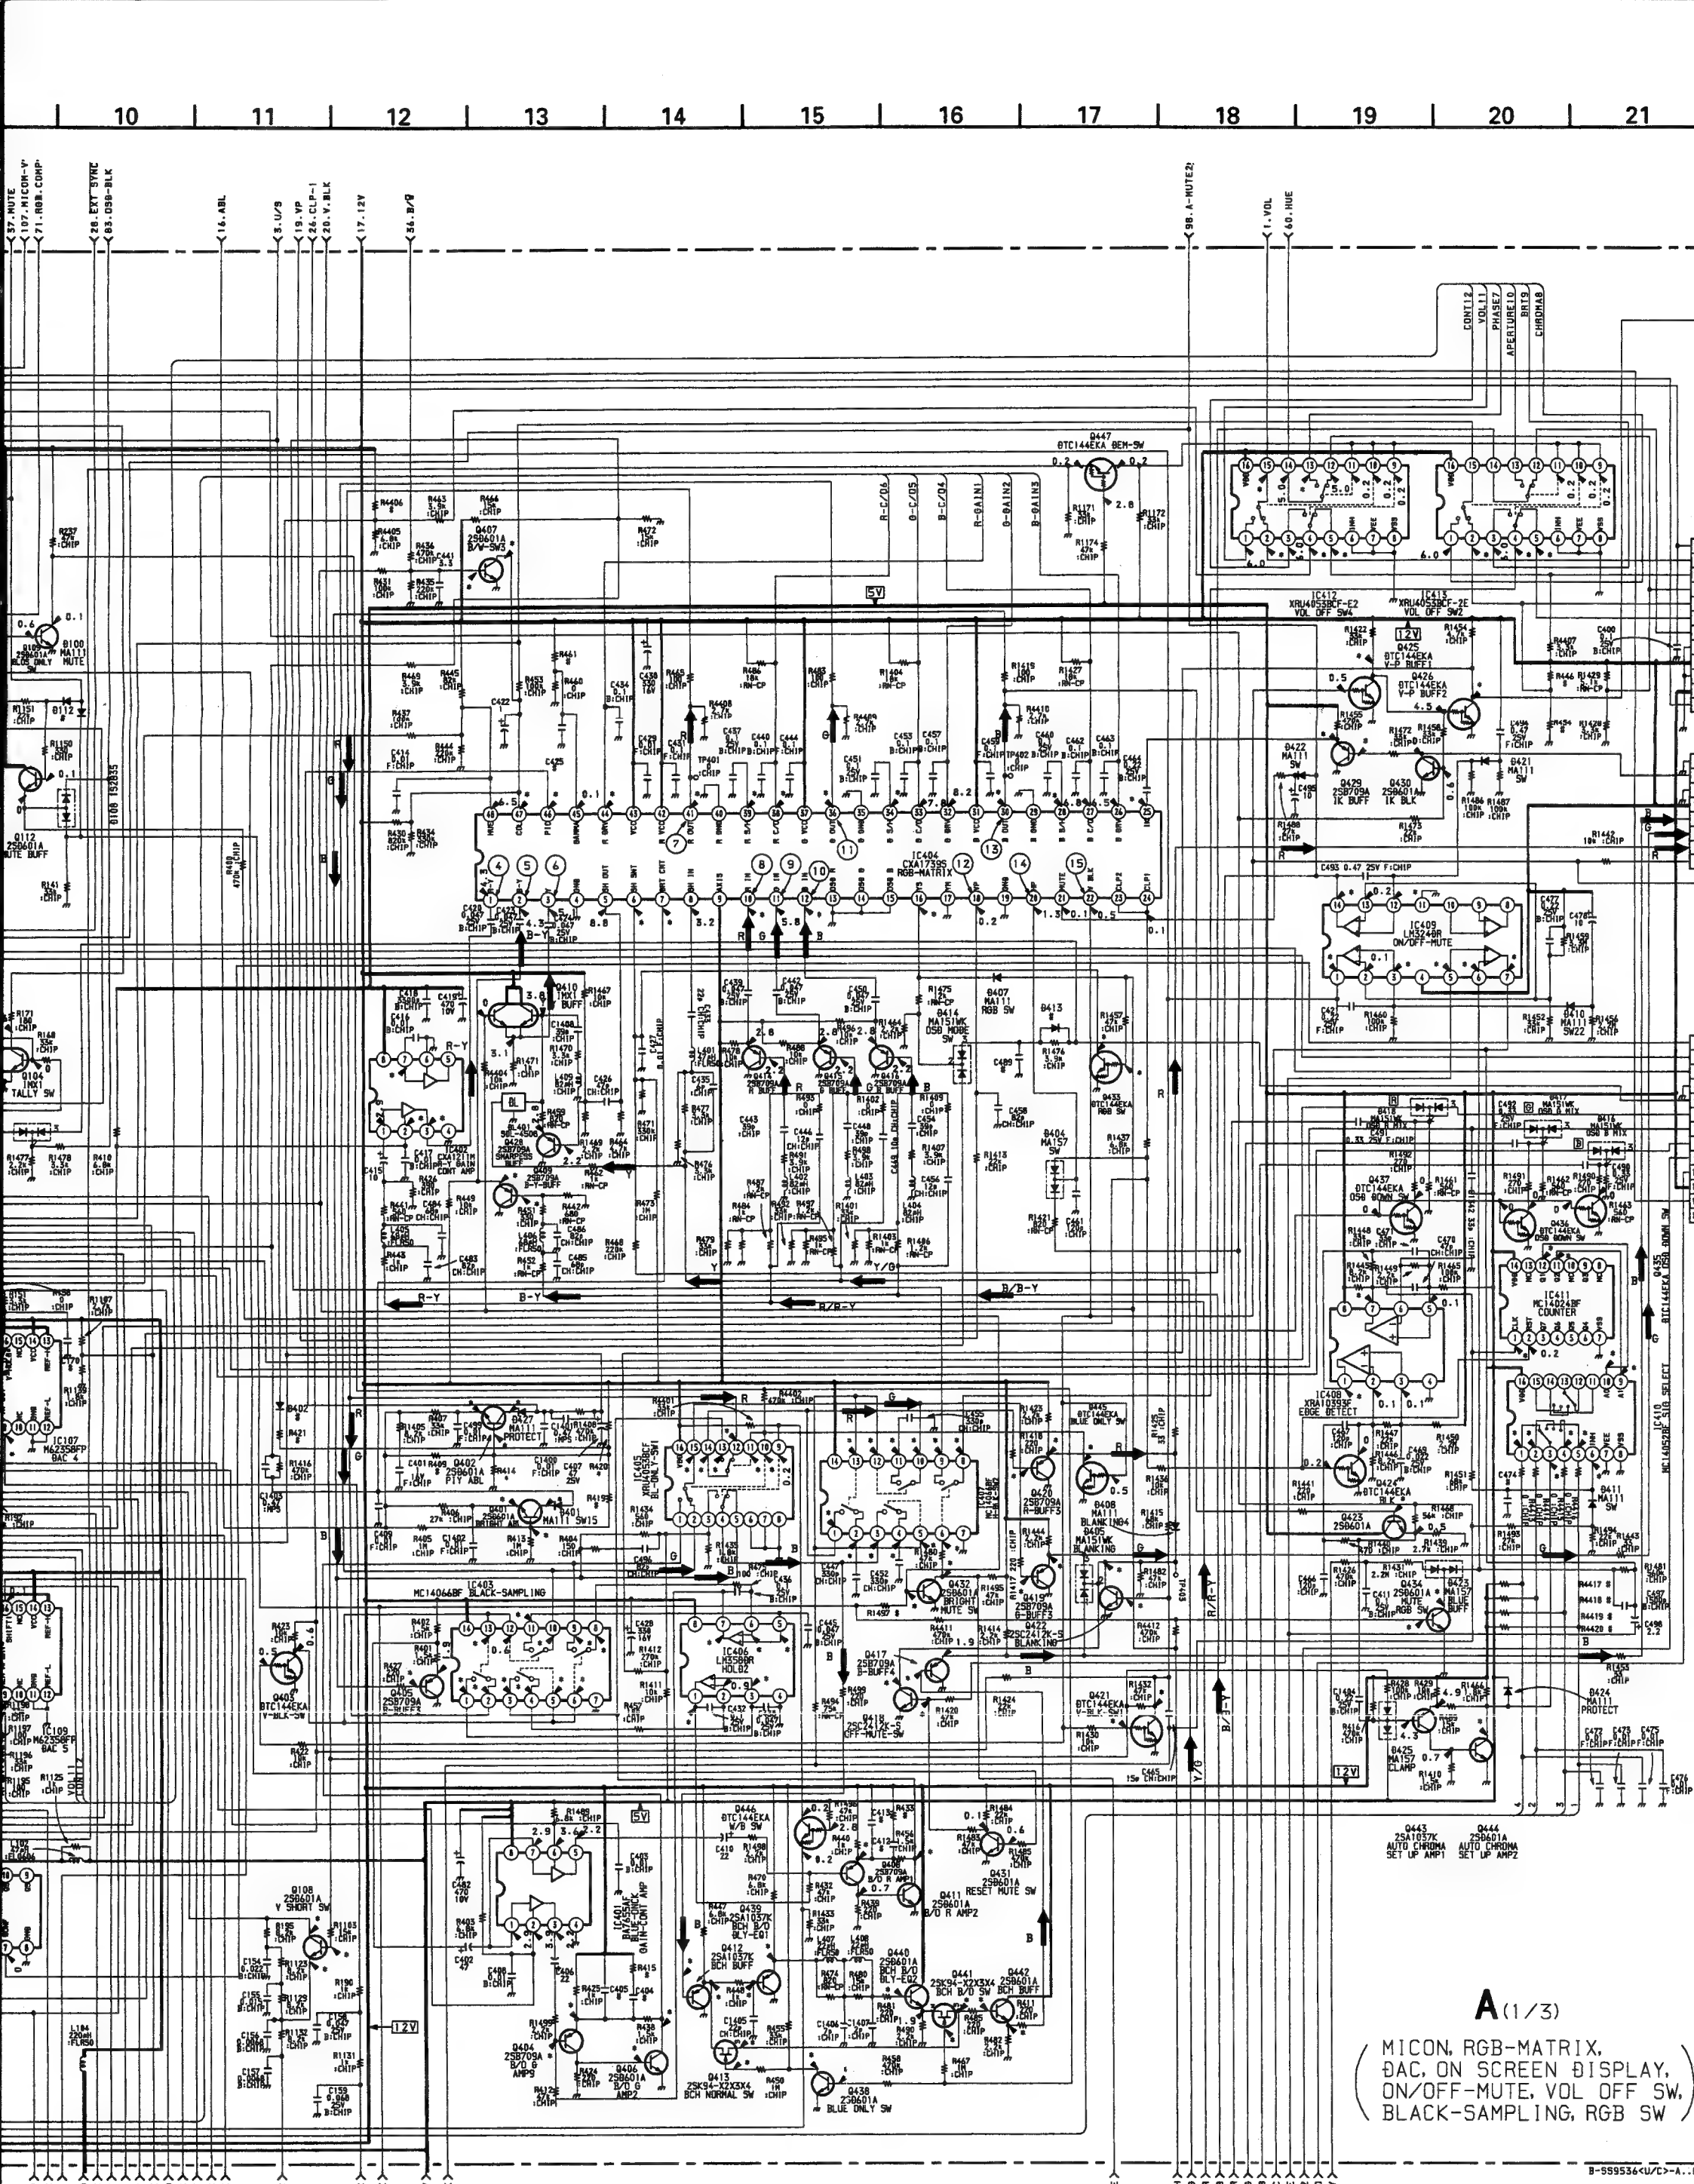
10
11
12
13
14
15
16
17
18
19
20
21
57.MUTE
107.MICOM-V
71.RGB.COMP
28.EXT SYNC
83.DSO-BLK
16.ABL
3.U/B
19.VP
26.CLP-I
20.V.BLK
17.12V
36.R/B
98.A-MUTE2
1.VOL
60.HUE
CONT12
VOL11
PHASE7
APERTURE10
BRT9
CHROMA8
IC412
XRU40533BCF-E2
VOL OFF SW4
IC413
XRU40533BCF-2E
VOL OFF SW2
Q447
DTC144EKA BEM-SW
Q407
2SB601A B/W-SW3
Q425
DTC144EKA V-P BUFF1
Q426
DTC144EKA V-P BUFF2
Q429
2SB709A IK BUFF
Q430
2SB601A IK BLK
IC404
CXA1739S RGB-MATRIX
IC409
LM3240R ON/OFF-MUTE
Q410
TMX1 BUFF
Q427
MA111 PROTECT
Q428
2SB709A SHARPNESS BUFF
Q409
2SB709A B-Y BUFF
Q418
2SB709A R BUFF
Q419
2SB709A G BUFF
Q417
2SB709A B-BUFF4
Q420
2SB709A R-BUFF3
Q422
2SC2412K-S BLANKING
Q418
2SC2412K-S OFF-MUTE-SW
IC405
XRA4053BCF BL-ONLY-SW1
IC407
MC14066BF
IC403
MC14066BF BLACK-SAMPLING
IC406
LM3580R HDL02
IC401
BA7655AF BLUE-ONLY GAIN-CONT AMP
Q401
MA111 SW15
Q402
2SB601A PIX ABL
Q403
2SB601A BRIGHT ABL
Q405
2SB709A R-BUFF2
Q404
2SB709A B/D G AMP3
Q406
2SB601A B/D G AMP2
Q408
MA111 BLANKING
Q405
MA151WK BLANKING
Q432
2SB601A BRIGHT MUTE SW
Q422
2SC2412K-S BLANKING
Q421
DTC144EKA V-BLK-SW1
Q423
2SB601A
Q424
DTC144EKA BLK
Q425
MA157 CLAMP
Q433
DTC144EKA RGB SW
Q407
MA111 RGB SW
Q414
MA151WK OSD MODE SW
Q413
Q404
MA157 BLUE BUFF
Q434
2SC2412K-S MUTE BLUE ONLY SW
Q435
DTC144EKA OSD BDWN SW
Q436
DTC144EKA OSD BDWN SW
Q437
DTC144EKA OSD BDWN SW
Q418
MA151WK OSD B MIX
Q417
MA151WK OSD B MIX
Q404
MA157 SW
Q411
MA111 SW
Q422
MA111 SW
Q421
MA111 SW
Q424
MA111 PROTECT
IC411
MC14024BF COUNTER
IC408
XRA10393F EDGE DETECT
IC410
MC14052BF SIG.SELECT
Q443
2SA1037K AUTO CHROMA SET UP AMP1
Q444
2SB601A AUTO CHROMA SET UP AMP2
Q108
2SB601A V SHORT SW
Q412
2SA1037K BCH BUFF
Q439
2SA1037K BCH B/D BLY-EQ1
Q440
2SB601A BCH B/D BLY-EQ2
Q441
2SK94-X2X3X4 BCH B/D SW
Q442
2SB601A BCH BUFF
Q413
2SK94-X2X3X4 BCH NORMAL SW
Q438
2SB601A BLUE ONLY SW
Q431
2SB601A RESET MUTE SW
Q411
2SB601A B/D R AMP2
Q408
2SB709A B/D R AMP1
Q446
DTC144EKA W/B SW
Q100
MA111 MUTE
Q112
2SB601A MUTE BUFF
Q104
MX1 TALLY SW
IC107
M62356FP DAC 4
IC109
M62356FP DAC 5
IC402
CXA1213N-Y GAIN CONT AMP
IC401
BA7655AF BLUE-ONLY GAIN-CONT AMP
L401
L402
L403
L404
L405
L406
L107
L184
220uH FLR50
R/B-Y
G/Y
B/R-Y
R-Y
B-Y
R/R-Y
Y/G
B/-Y
5V
12V
A(1/3)
(MICON, RGB-MATRIX, DAC, ON SCREEN DISPLAY, ON/OFF-MUTE, VOL OFF SW, BLACK-SAMPLING, RGB SW)
99.7.SUP
97.SHIFT-2
96.SHIFT-1
84.12V-B
14.V.BL DAC
9.V.LINE DAC
18.H.BLK DAC
8.V.SIZE DAC
11.H.FREQ OPE
63.V.HOLD
12.V.BLK DAC
90.V-CENT
13.V.PHASE DAC
59.X TAL OPE
5.AFC DAC
4.PIN DAC
106.DR-MUTE
10.5V
64.H-BLK
108.NOR MUTE
30.R09-H
34.Y/G
33.R-Y/R
32.B-Y/B
80.050-R
81.050-G
82.050-B
91.APL-DC
92.0/Y PEDE
31.HP-2
51.V10EQ
93.0/Y
B-559536<U/C>-A..
– 60 –
– 61 –

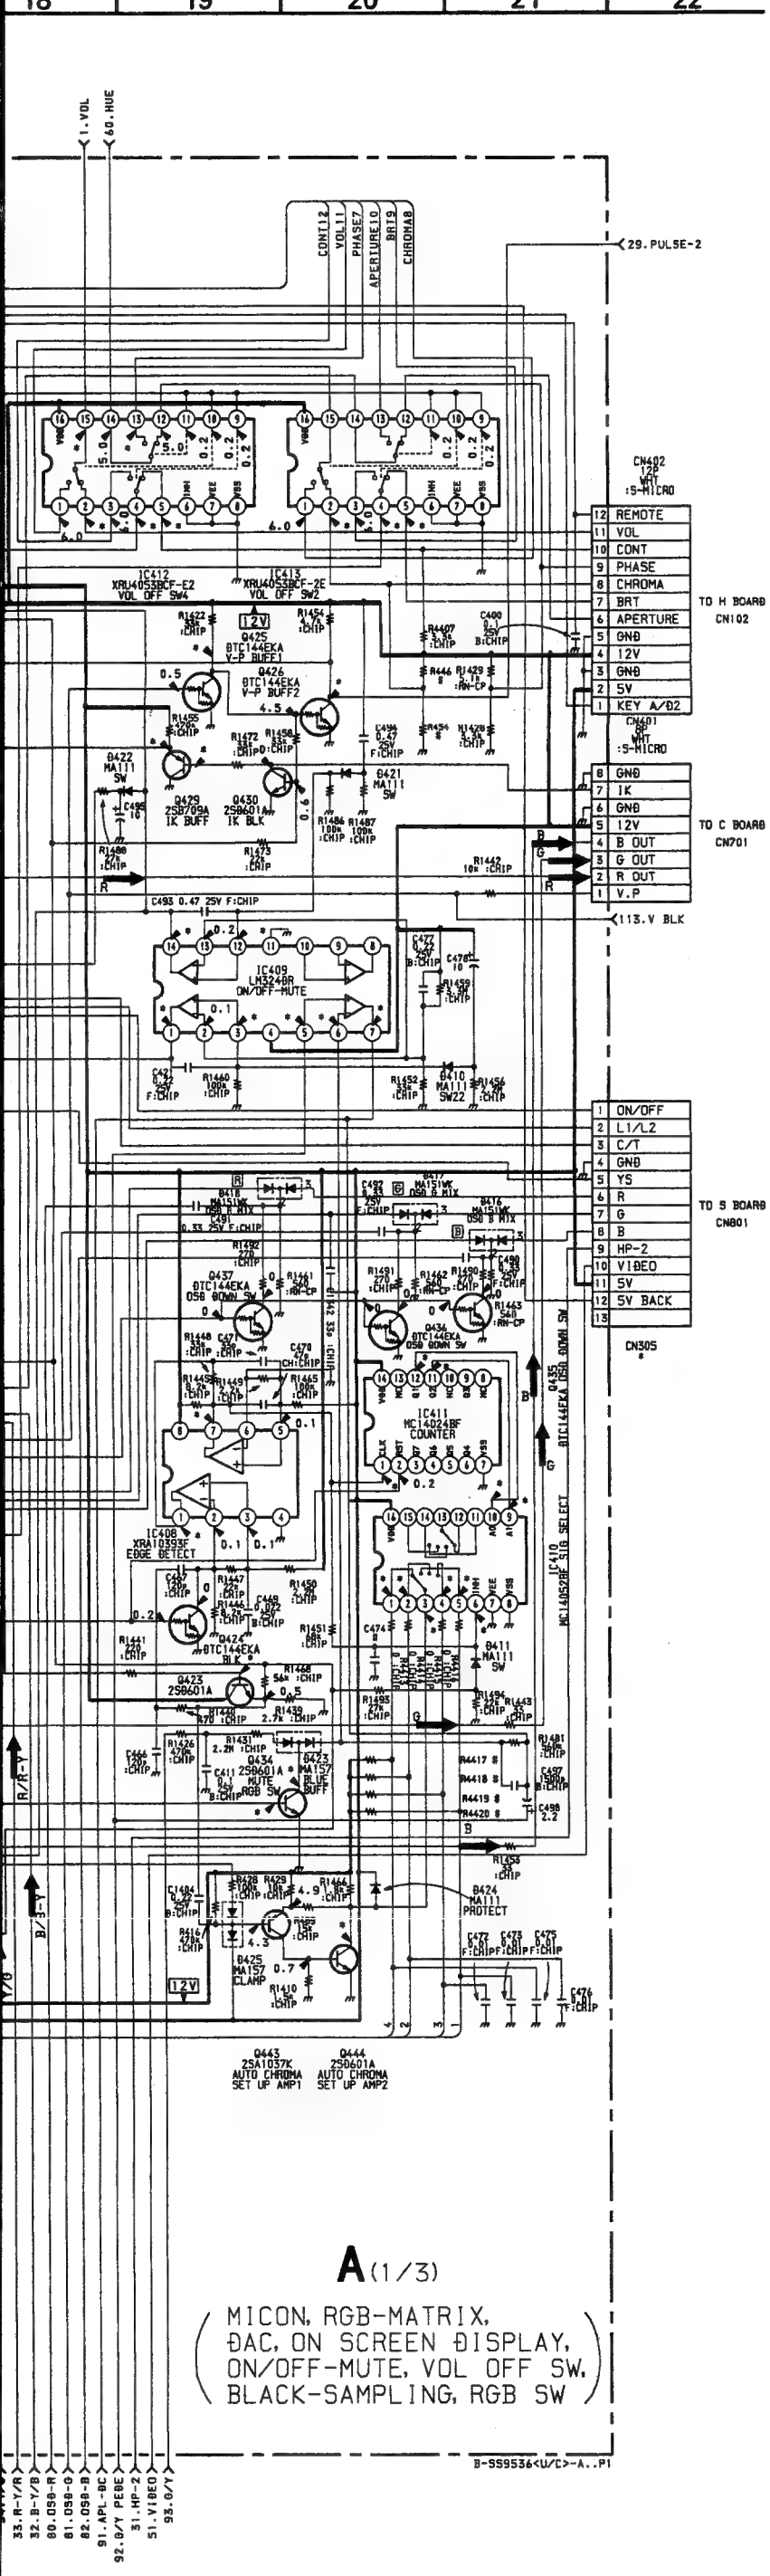

A(1/3)

(MICON, RGB-MATRIX, ĐAC, ON SCREEN ĐISPLAY, ON/OFF-MUTE, VOL OFF SW, BLACK-SAMPLING, RGB SW)

B-SS9536<U/C>-A..P1

• A BOARD WAVEFORMS

① 4.3 Vp-p (H)	② 5.6 Vp-p (10MHz)	③ 4.8 Vp-p (V)
④ PAL 0.3 Vp-p (H) SECAM 0.32 Vp-p (H)	④ NTSC3.58 & 4.43 0.28 Vp-p (H) S-VIDEO 0.35 Vp-p (H)	⑤ PAL 0.45 Vp-p (H) SECAM 0.5 Vp-p (H)
⑤ NTSC3.58 0.42 Vp-p (H) NTSC4.43 0.38 Vp-p (H)	⑤ S-VIDEO 0.45 Vp-p (H)	⑥ PAL 0.57 Vp-p (H) SECAM 0.45 Vp-p (H)
⑥ NTSC3.58 & 4.43 0.4 Vp-p (H) S-VIDEO 0.52 Vp-p (H)	⑦ PAL 2.4 Vp-p (H) SECAM 2.3 Vp-p (H)	⑦ NTSC3.58 2.1 Vp-p (H) NTSC4.43 2.2 Vp-p (H)
⑦ S-VIDEO 2.4 Vp-p (H)	⑦ ANALOG RGB 2.7 Vp-p (H)	⑧ ANALOG RGB 0.6 Vp-p (H)
⑨ ANALOG RGB 0.6 Vp-p (H)	⑩ ANALOG RGB 0.6 Vp-p (H)	⑪ PAL 2.6 Vp-p (H) SECAM 2.5 Vp-p (H)
⑪ NTSC3.58 2.4 Vp-p (H) NTSC4.43 2.5 Vp-p (H)	⑪ S-VIDEO 2.4 Vp-p (H)	⑪ ANALOG RGB 3.0 Vp-p (H)
⑫ 4.6 Vp-p (V)	⑬ PAL 1.8 Vp-p (H) SECAM 1.9 Vp-p (H)	⑬ NTSC3.58 1.8 Vp-p (H) NTSC4.43 1.7 Vp-p (H)
⑬ S-VIDEO 1.9 Vp-p (H)	⑬ ANALOG RGB 2.4 Vp-p (H)	⑭ 3.7 Vp-p (H)
⑮ 3.6 Vp-p (V)		

A BOARD (1/3) * MARK LIST

	PVM-20M4U/E/A	PVM-20M2U/E
R414	10k : CHIP	0 : CHIP

: Not Used

A BOARD (1/3) * MARK

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO
IC101 ②	2.3	2.4	2.2	2.2	2.0
③	4.5	4.6	4.5	4.4	4.4
⑤	4.1	3.4	0	0.1	0
⑫	3.4	3.5	3.5	3.5	3.1
⑬	0	0	0	0	4.8
⑭	0	0	0	0	0
⑰	4.9	5.0	0	0	0
⑰	5.0	5.0	0	5.0	0
⑭	5.0	5.0	0	0	0
⑮	0	5.0	0	0	0
⑯	0.1	0	0.1	0.1	4.9
⑱	5.0	5.0	5.0	5.0	0
⑲	5.0	5.0	5.0	5.0	4.9
⑳	5.0	5.0	5.0	5.0	5.0
㉑	4.2	4.1	4.6	5.0	3.9
㉒	4.0	4.0	4.6	5.0	3.6
㉗	0.3	4.4	0.1	0.7	0.1
㉘	4.2	0.1	4.3	4.2	4.2
㉙	4.0	3.4	3.6	3.7	3.9
㉚	0.5	0.9	1.0	0.8	3.1
㉛	3.0	2.5	2.6	2.3	3.8
㉜	3.6	3.0	2.9	3.2	3.9
㉝	4.0	4.0	4.0	4.0	2.9
IC103 ⑤	0.2	0	0.2	0.2	0
IC104 ④	2.3	2.3	2.2	2.2	2.0
⑬	3.5	3.5	3.5	3.5	3.1
IC105 ③	2.3	2.3	2.2	2.2	0
⑤	0	0.1	0.1	0	11.8
⑭	2.6	2.7	2.7	2.6	2.8
⑮	5.4	5.4	5.4	5.4	6.6
IC106 ③	2.3	2.3	2.2	2.2	2.1
⑤	5.4	5.4	5.4	5.4	4.1
⑦	2.4	2.4	2.4	2.4	0.5
⑧	7.8	7.8	7.8	7.7	5.5
⑨	5.1	5.1	5.1	5.1	4.0
⑯	0.1	10.5	10.5	10.5	10.9
⑰	3.1	3.1	2.6	3.1	2.7
⑱	2.4	4.6	2.1	2.2	2.1
⑲	6.3	6.3	11.9	9.0	10.7
⑳	3.6	3.6	4.8	3.6	4.3
㉑	0.8	1.8	0.4	0.3	2.4
IC107 ②	4.6	4.5	4.5	4.5	4.4
③	2.3	2.3	2.2	0	2.1
④	2.8	2.8	2.8	2.8	3.3
⑤	1.5	1.4	1.4	1.4	2.3
⑦	2.9	2.9	2.9	2.9	2.1
⑧	2.6	2.6	2.6	2.6	2.9
⑨	2.9	2.9	2.9	2.9	2.6
⑪	2.6	2.6	2.8	2.8	2.8
⑯	3.2	3.2	5.4	5.4	5.3
⑳	4.5	4.6	5.0	5.0	3.7
㉑	6.3	6.3	6.1	6.1	6.0
IC109 ②	4.6	4.5	4.5	4.5	4.4
③	2.3	2.3	2.2	2.2	2.1
⑩	11.9	11.9	11.9	11.9	11.9
⑱	11.9	11.9	0.1	0	0.1
IC110 ③	2.3	2.4	2.2	2.2	2.0
④	7.2	7.2	7.2	7.2	8.3
⑯	5.8	5.8	5.8	5.8	6.2
⑰	11.9	11.9	11.9	11.9	7.8
㉑	0	7.9	7.9	7.9	7.8
㉒	3.7	3.7	3.5	3.5	3.5
IC111 ④	0.3	0.3	0.3	0.3	0
⑪	0.2	0	0.1	0.1	0.1
⑫	0	5.0	5.0	5.0	0
⑬	5.0	5.0	5.0	5.0	0
IC402 ②	3.1	3.9	2.9	3.0	3.0
③	0	2.3	2.3	0	2.2
⑦	2.9	2.9	2.9	0	2.9
IC403 ①	0.8	0.8	0.8	0.8	0.8
②	1.2	1.2	0.8	0.8	1.2
③	1.4	1.3	0.9	0.9	1.3
④	0.8	0.8	0.9	0.9	0.8
⑤	0.6	0.5	0.6	0.6	0
⑤	0.5	0.6	0.6	0.6	0.6
⑧	1.0	1.0	1.0	1.0	0.8
⑨	1.6	1.5	1.1	1.1	1.4
⑩	1.4	1.4	1.0	1.0	1.2
⑪	0.9	1.0	1.0	1.0	0.8
⑬	0.6	0.6	0.6	0.6	0
IC404 ⑤	3.0	3.0	3.0	3.0	4.5
⑦	4.9	4.9	4.9	4.9	4.7
⑩	5.6	5.6	5.6	5.6	5.6
⑫	5.6	5.6	5.6	5.6	5.6
⑯	0	0.1	0	0	0
⑰	3.8	4.0	4.1	4.2	4.0
⑱	7.1	6.6	8.0	8.0	7.7
⑲	1.4	1.3	1.2	1.1	1.2
⑳	7.0	7.3	8.1	7.8	7.8
㉕	1.4	1.3	1.2	1.1	1.2
㉖	7.8	7.8	7.7	7.8	8.0
㉗	6.9	7.1	7.8	7.7	7.6
㊶	1.2	1.2	1.0	1.0	1.2
㊹	7.2	7.2	7.2	7.2	8.3
㊺	7.2	7.2	7.2	7.2	6.9
㊻	6.6	6.6	6.6	6.6	5.5
IC405 ①	1.6	1.5	1.1	1.3	1.4
②	1.4	1.4	0.9	0	1.2
③	1.2	1.2	0.9	0	1.1
④	1.4	1.3	1.0	0	1.2
⑤	1.3	1.3	1.0	0	1.2
⑩	0.5	0.5	0.6	1.0	0.3
⑪	0.5	0.5	0.6	1.3	0.3
⑫	1.2	1.2	0.8	1.1	1.2
⑬	1.4	1.3	0.9	1.3	1.3
⑭	1.2	1.2	0.8	1.2	1.2
⑮	1.4	1.3	1.0	1.3	1.2
IC406 ①	4.8	5.1	4.8	4.8	4.8
③	0.8	0	0.9	0.9	0.8
⑤	1.0	0.9	1.0	1.0	0.8
⑥	1.0	1.0	1.1	1.1	0.8
⑦	5.1	5.1	4.9	4.9	4.9
IC407 ①	1.2	1.2	0.9	1.2	1.2
②	0.4	- 0.1	0.5	0.3	0.4
③	1.4	1.3	1.0	1.3	1.2
④	0.6	0	0.7	0.5	0.5
⑤	2.0	1.8	2.0	2.0	2.0
⑥	11.7	10.7	11.6	11.3	11.7
⑧	5.5	5.5	5.5	5.5	5.4
⑨	5.5	5.5	5.5	5.5	5.4
⑩	1.4	1.4	1.0	1.3	1.2
⑪	0.6	- 0.1	0.7	0.6	0.5
⑫	2.0	1.7	2.0	2.0	2.0
⑬	2.0	1.7	2.0	2.0	2.0
IC408 ①	3.1	2.9	2.9	3.1	3.7
⑦	4.1	3.8	3.9	4.1	4.2
IC409 ①	0	8.8	9.0	9.4	0
③	0	0.6	0.4	0.3	0.3
⑤	5.9	5.9	6.3	0	5.9
⑥	5.9	5.9	6.3	6.0	5.9
⑦	5.9	5.9	6.3	6.0	5.9
⑫	0.1	1.8	0.5	1.2	0.1
⑭	0	10.7	6.6	6.9	0

Schematic diagram
← A(1/3) board

• A BOARD WAVEFORMS

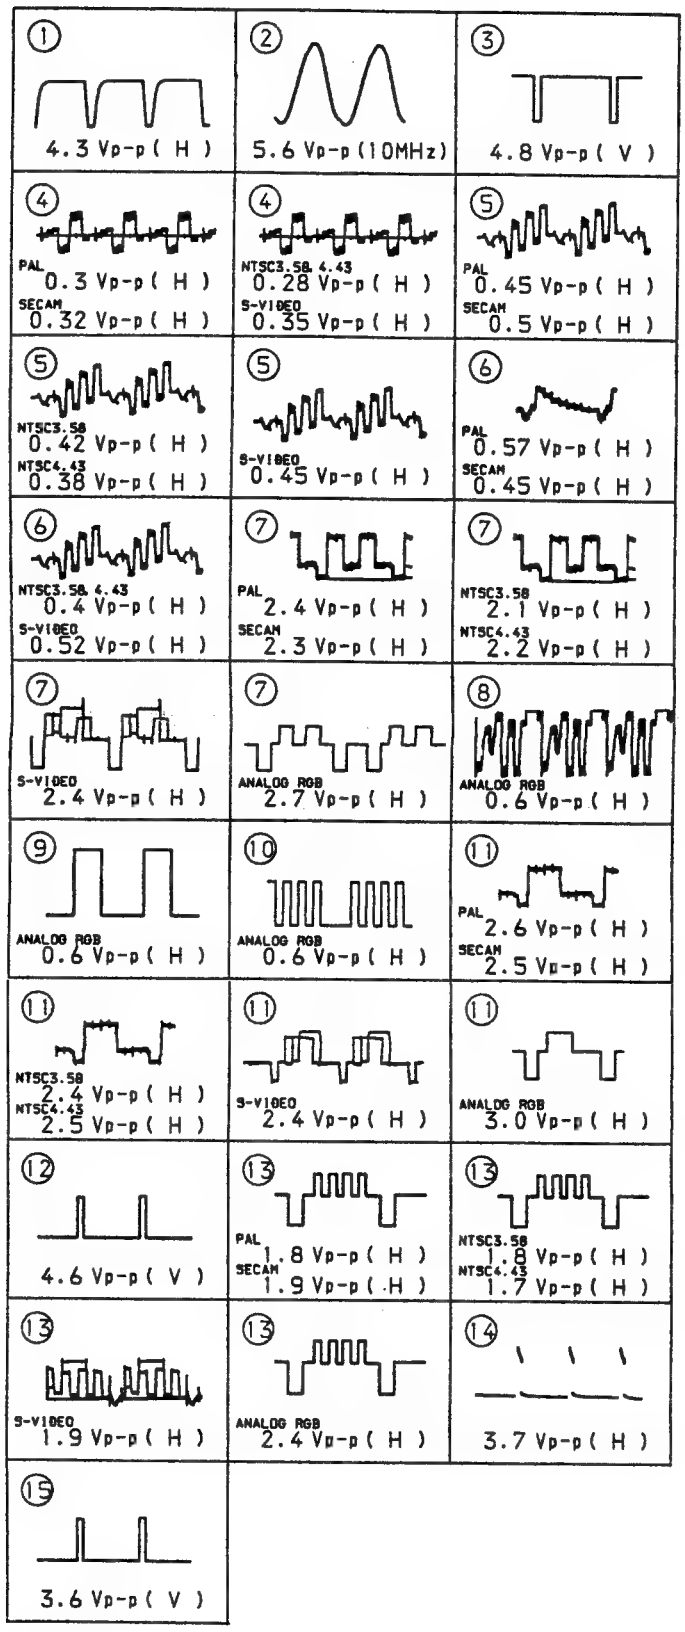

A BOARD (1/3) * MARK LIST

	PVM-20M4U/E/A	PVM-20M2U/E
R414	10k : CHIP	0 : CHIP

: Not Used

A BOARD (1/3) * MARK

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
IC101 ②	2.3	2.4	2.2	2.2	2.0	2.3
③	4.5	4.6	4.5	4.4	4.4	4.5
⑥	4.1	3.4	0	0.1	0	0
⑫	3.4	3.5	3.5	3.5	3.1	3.5
⑬	0	0	0	0	4.8	0
⑭	0	0	0	0	0	4.9
⑰	4.9	5.0	0	0	0	0
⑰	5.0	5.0	0	5.0	0	0
㉔	5.0	5.0	0	0	0	0
㉕	0	5.0	0	0	0	0
㉖	0.1	0	0.1	0.1	4.9	0.1
㉘	5.0	5.0	5.0	5.0	0	5.0
㉙	5.0	5.0	5.0	5.0	4.9	0.1
㉚	5.0	5.0	5.0	5.0	5.0	0.1
㉝	4.2	4.1	4.6	5.0	3.9	3.9
㉞	4.0	4.0	4.6	5.0	3.6	3.7
㉜	0.3	4.4	0.1	0.7	0.1	0.1
㉛	4.2	0.1	4.3	4.2	4.2	4.3
㉟	4.0	3.4	3.6	3.7	3.9	4.0
㊱	0.5	0.9	1.0	0.8	3.1	1.9
㊲	3.0	2.5	2.6	2.3	3.8	2.2
㊴	3.6	3.0	2.9	3.2	3.9	4.0
㊵	4.0	4.0	4.0	4.0	2.9	4.0
IC103 ⑥	0.2	0	0.2	0.2	0	0
IC104 ④	2.3	2.3	2.2	2.2	2.0	2.3
⑱	3.5	3.5	3.5	3.5	3.1	3.5
IC105 ③	2.3	2.3	2.2	2.2	0	2.3
⑤	0	0.1	0.1	0	11.8	0
⑮	2.6	2.7	2.7	2.6	2.8	2.6
⑯	5.4	5.4	5.4	5.4	6.6	8.1
IC106 ①	2.3	2.3	2.2	2.2	2.1	2.3
⑤	5.4	5.4	5.4	5.4	4.1	5.4
⑦	2.4	2.4	2.4	2.4	0.6	2.4
⑧	7.8	7.8	7.8	7.7	5.5	7.8
⑨	5.1	5.1	5.1	5.1	4.0	5.1
⑯	0.1	10.5	10.5	10.5	10.9	10.5
⑰	3.1	3.1	2.6	3.1	2.7	2.5
⑱	2.4	4.6	2.1	2.2	2.1	3.2
⑲	6.3	6.3	11.9	9.0	10.7	3.7
㉑	3.6	3.6	4.8	3.6	4.3	9.5
㉒	0.8	1.8	0.4	0.3	2.4	3.1
IC107 ②	4.6	4.5	4.5	4.5	4.4	4.5
③	2.3	2.3	2.2	0	2.1	0
④	2.8	2.8	2.8	2.8	3.3	2.8
⑤	1.5	1.4	1.4	1.4	2.3	1.4
⑦	2.9	2.9	2.9	2.9	2.1	2.9
⑧	2.6	2.6	2.6	2.6	2.9	2.6
⑨	2.9	2.9	2.9	2.9	2.6	2.9
⑰	2.6	2.6	2.8	2.8	2.8	2.8
⑱	3.2	3.2	5.4	5.4	5.3	5.4
⑲	4.5	4.6	5.0	5.0	3.7	5.0
㉑	6.3	6.3	6.1	6.1	6.0	6.1
IC109 ②	4.6	4.5	4.5	4.5	4.4	4.4
③	2.3	2.3	2.2	2.2	2.1	2.3
⑰	11.9	11.9	11.9	11.9	11.9	0.1
⑱	11.9	11.9	0.1	0	0.1	11.8
IC110 ③	2.3	2.4	2.2	2.2	2.0	2.2
④	7.2	7.2	7.2	7.2	8.3	7.2
⑯	5.8	5.8	5.8	5.8	6.2	5.8
⑰	11.9	11.9	11.9	11.9	7.8	11.9
㉑	0	7.9	7.9	7.9	7.8	7.9
㉒	3.7	3.7	3.5	3.5	3.5	3.6
IC111 ④	0.3	0.3	0.3	0.3	0	0.3
⑪	0.2	0	0.1	0.1	0.1	0.1
⑫	0	5.0	5.0	5.0	0	5.0
⑬	5.0	5.0	5.0	5.0	0	5.0
IC402 ②	3.1	3.9	2.9	3.0	3.0	3.6
③	0	2.3	2.3	0	2.2	2.2
⑦	2.9	2.9	2.9	0	2.9	2.9
IC403 ①	0.8	0.8	0.8	0.8	0.8	0
②	1.2	1.2	0.8	0.8	1.2	0.9
③	1.4	1.3	0.9	0.9	1.3	0
④	0.8	0.8	0.9	0.9	0.8	1.4
⑤	0.6	0.5	0.6	0.6	0	0.6
⑥	0.5	0.6	0.6	0.6	0.6	0
⑧	1.0	1.0	1.0	1.0	0.8	1.1
⑨	1.6	1.5	1.1	1.1	1.4	1.6
⑩	1.4	1.4	1.0	1.0	1.2	1.5
⑪	0.9	1.0	1.0	1.0	0.8	1.1
⑬	0.6	0.6	0.6	0.6	0	0.6
IC404 ⑥	3.0	3.0	3.0	3.0	4.5	0
⑦	4.9	4.9	4.9	4.9	4.7	6.1
⑩	5.6	5.6	5.6	5.6	5.6	5.8
⑫	5.6	5.6	5.6	5.6	5.6	5.8
⑮	0	0.1	0	0	0	4.4
⑯	3.8	4.0	4.1	4.2	4.0	3.6
⑰	7.1	6.6	8.0	8.0	7.7	7.9
㊳	1.4	1.3	1.2	1.1	1.2	1.4
㊴	7.0	7.3	8.1	7.8	7.8	7.8
㊵	1.4	1.3	1.2	1.1	1.2	1.5
㊶	7.8	7.8	7.7	7.8	8.0	7.7
㊷	6.9	7.1	7.8	7.7	7.6	7.6
⑪	1.2	1.2	1.0	1.0	1.2	1.3
⑭	7.2	7.2	7.2	7.2	8.3	7.2
⑮	7.2	7.2	7.2	7.2	6.9	7.0
⑰	6.6	6.6	6.6	6.6	5.5	0
IC405 ①	1.6	1.5	1.1	1.3	1.4	1.6
②	1.4	1.4	0.9	0	1.2	1.5
③	1.2	1.2	0.9	0	1.1	1.2
④	1.4	1.3	1.0	0	1.2	1.4
⑤	1.3	1.3	1.0	0	1.2	1.4
⑩	0.5	0.5	0.6	1.0	0.3	0.2
⑪	0.5	0.5	0.6	1.3	0.3	0.2
⑫	1.2	1.2	0.8	1.1	1.2	1.3
⑬	1.4	1.3	0.9	1.3	1.3	1.4
⑭	1.2	1.2	0.8	1.2	1.2	1.3
⑮	1.4	1.3	1.0	1.3	1.2	1.5
IC406 ①	4.8	5.1	4.8	4.8	4.8	5.1
③	0.8	0	0.9	0.9	0.8	1.0
⑤	1.0	0.9	1.0	1.0	0.8	1.1
⑥	1.0	1.0	1.1	1.1	0.8	1.1
⑦	5.1	5.1	4.9	4.9	4.9	5.1
IC407 ①	1.2	1.2	0.9	1.2	1.2	1.3
②	0.4	- 0.1	0.5	0.3	0.4	0.5
③	1.4	1.3	1.0	1.3	1.2	1.4
④	0.6	0	0.7	0.5	0.5	0.7
⑤	2.0	1.8	2.0	2.0	2.0	2.0
⑥	11.7	10.7	11.6	11.3	11.7	11.2
⑧	5.5	5.5	5.5	5.5	5.4	8.5
⑨	5.5	5.5	5.5	5.5	5.4	8.4
⑩	1.4	1.4	1.0	1.3	1.2	1.5
⑪	0.6	- 0.1	0.7	0.6	0.5	0.6
⑫	2.0	1.7	2.0	2.0	2.0	2.0
⑬	2.0	1.7	2.0	2.0	2.0	2.0
IC408 ①	3.1	2.9	2.9	3.1	3.7	3.4
⑦	4.1	3.8	3.9	4.1	4.2	4.1
IC409 ①	0	8.8	9.0	9.4	0	7.5
③	0	0.6	0.4	0.3	0.3	1.6
⑤	5.9	5.9	6.3	0	5.9	5.9
⑥	5.9	5.9	6.3	6.0	5.9	5.9
⑦	5.9	5.9	6.3	6.0	5.9	5.9
⑫	0.1	1.8	0.5	1.2	0.1	0
⑭	0	10.7	6.6	6.9	0	10.7

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
IC410 ①	3.8	4.0	4.0	4.0	0	3.9
②	3.0	3.1	2.4	3.1	0	4.0
③	1.3	0.7	1.4	1.6	2.3	1.5
④	3.5	3.6	3.0	3.8	3.9	3.9
⑤	0.6	1.3	1.1	1.1	3.1	1.7
⑥	4.0	4.0	4.0	3.9	0	0
⑨	0	2.0	1.9	1.8	2.5	1.4
⑩	2.0	2.3	2.3	2.0	1.8	3.0
IC411 ①	4.1	4.0	3.9	3.8	4.2	4.1
⑪	1.8	2.0	1.9	1.8	2.5	1.3
⑰	2.0	2.3	2.3	2.1	1.8	3.0
IC412 ②	0.4	0.5	0.4	0.4	5.9	0.6
④	8.9	8.9	8.9	8.9	8.9	8.3
⑤	9.0	8.9	9.0	8.9	8.9	8.3
⑪	6.0	6.0	6.0	6.0	6.0	0
⑬	0.4	0.5	0.4	0.4	5.9	0.5
IC413 ②	7.9	8.0	8.0	8.0	0	6.9
④	0	5.5	5.5	5.5	5.4	0
⑤	5.5	5.5	5.5	5.5	5.4	8.6
⑫	3.1	3.1	3.1	3.1	0	5.1
⑭	3.1	3.1	3.1	3.1	6.0	5.1
⑮	7.9	7.9	8.0	7.9	6.3	6.9
Q102 B	10.9	10.9	10.9	10.9	10.7	10.9
C	8.1	8.1	8.1	8.1	0	8.1
E	11.5	11.5	11.5	11.5	11.3	11.5
Q104 B	- 0.2	0	- 0.2	0	0	- 0.2
Q107 B	5.0	5.0	5.0	5.0	5.0	0.1
C	0	0	0	0	0	5.0
Q108 C	2.6	2.6	2.6	2.6	2.9	2.6
E	2.6	2.6	2.6	2.6	2.9	2.6
Q111 B	5.0	5.0	0	0	4.9	4.9
C	0.4	0.4	0	0	0.4	0.4
Q113 C	4.1	4.3	4.2	4.2	3.8	4.0
Q401 B	1.1	0.8	1.5	1.6	1.2	1.0
C	7.5	5.5	6.0	5.2	8.4	10.0
E	1.4	1.6	3.2	3.4	3.1	1.0
Q402 B	0.5	0.5	0.5	0.5	2.4	0.5
C	9.5	7.7	8.1	7.4	10.4	6.9
E	1.4	1.6	3.2	3.3	3.2	1.0
Q404 B	5.3	4.1	4.9	5.2	5.3	5.2
E	6.1	6.3	6.0	6.1	6.1	6.2
Q405 B	1.3	1.3	1.2	1.1	1.2	1.4
Q406 B	0.7	0.7	0	0.7	0.7	0.7
C	1.6	1.5	1.0	1.5	1.4	1.6
Q407 B	0	0	0	0	0	0.6
C	6.6	6.6	6.6	6.6	5.4	0
Q408 B	5.3	4.7	4.9	5.0	5.2	5.2
E	6.0	6.2	5.9	6.1	6.0	6.1
Q409 B	1.9	1.6	1.6	1.6	1.7	1.6
E	2.0	2.2	2.2	2.2	2.3	2.2
Q411 C	1.4	1.4	0.9	1.3	1.3	1.4
Q412 B	1.3	1.3	1.0	1.3	1.1	1.4
E	2.0	1.9	1.7	1.9	1.8	2.0
Q413 G	2.0	- 15.1	1.8	- 2.2	1.8	- 2.1
D	2.0	1.9	- 4.3	0	2.2	2.0
S	2.0	1.9	1.7	1.9	1.8	2.0
Q417 B	1.4	1.4	1.2	1.2	1.2	1.4
Q418 C	2.1	2.1	1.7	1.7	1.7	2.0
Q419 B	1.4	1.4	1.2	1.1	1.2	1.5
E	2.0	1.9	1.7	1.7	1.8	2.0
Q420 B	1.2	1.2	1.0	1.0	1.2	1.3
E	1.8	1.8	1.6	1.6	1.8	1.9
Q422 C	2.1	2.1	1.7	1.7	1.8	2.0
Q423 B	0.5	0.3	0.4	0.4	0.4	0.2
Q425 C	4.5	4.5	4.5	4.5	4.7	4.5
Q426 C	0.8	0.8	0.7	0.7	0.7	0
Q429 B	0.1	0.8	0.4	0.4	0.1	0.1
E	0	- 2.3	- 1.2	- 1.2	0.4	0.4
Q432 B	- 0.3	- 3.8	- 3.4	- 2.7	- 0.1	- 3.9
C	11.9	11.6	11.8	11.8	12.0	11.6
Q433 B	0	- 0.1	0	0	0	2.7
C	3.0	3.0	3.0	3.0	4.5	0
Q434 B	- 0.1	0	0	0	- 0.1	0.4
C	3.6	4.7	4.5	4.8	2.9	0
Q438 B	- 0.4	- 2.9	- 3.1	- 2.4	0	- 2.4
C	11.7	11.4	11.7	11.7	11.6	11.7
Q439 B	2.0	1.9	1.8	1.7	1.8	2.0
E	2.6	2.5	2.4	2.4	0	2.6
Q440 B	2.6	2.5	2.5	2.5	2.4	2.7
Q441 G	- 1.1	- 13.0	1.7	- 4.8	0	- 0.7
D	2.0	1.9	- 8.1	1.9	1.8	2.0
S	2.0	1.9	1.6	1.9	1.8	2.0
Q442 B	1.3	1.3	1.1	1.1	1.1	2.1
E	0.9	0.9	0.7	0.7	0.7	1.5
Q444 C	1.2	1.1	1.2	1.4	2.2	1.3
Q445 C	0.4	1.2	1.4	1.3	0.3	0.4

Schematic diagram
← A(1/3) board

Schematic diagrams
A(2/3) board →

A BOARD (2/3) * MARK

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
IC301 ①	2.8	0	2.8	3.0	3.0	2.3
②	2.0	0	1.8	1.7	1.7	3.5
IC302 ①	2.9	2.9	2.9	0.3	2.9	2.9
⑤	5.3	5.1	4.5	4.5	4.5	4.5
⑦	10.5	8.4	0	0	0	0
IC303 ⑧	2.3	2.6	2.2	2.2	2.6	2.8
⑭	0.1	4.2	0.6	0.6	0.6	0.1
⑯	3.9	2.8	3.1	3.1	3.3	3.9
IC304 ④	2.2	2.6	2.2	2.2	2.2	2.2
⑨	9.4	9.1	9.4	9.4	9.4	9.4
⑩	7.3	7.3	2.5	2.5	2.6	2.5
⑪	7.3	7.3	2.5	2.6	2.6	2.5
⑭	1.9	1.9	2.2	2.2	2.2	2.2
⑮	2.5	2.5	2.2	2.2	2.3	2.2
IC305 ①	2.8	2.8	2.8	0	2.8	2.8
④	2.5	1.1	2.5	2.4	2.4	1.3
⑦	4.1	4.1	4.1	4.1	4.2	4.5
⑨	0.4	0.2	0	0	0	0.1
⑫	2.6	2.6	2.5	2.4	2.5	2.7
⑭	0	0	0.8	0.8	0.9	0.9
⑮	2.1	2.7	1.9	1.9	1.9	2.7
IC306 ①	8.1	8.1	8.1	8.1	8.1	0
②	0	0	0	0.1	0.1	4.4
IC309 ②	3.6	0	3.6	3.6	3.6	3.6
④	0	0	0	0	0	4.4
IC310 ①	6.2	6.2	6.2	6.2	6.2	5.9
③	6.3	6.3	6.2	6.2	6.2	5.9
⑬	5.9	5.9	6.0	6.3	5.9	5.9
IC311 ①	0	6.2	6.2	6.2	6.2	6.2
②	6.2	6.2	6.2	6.2	6.2	5.9
④	6.2	6.3	6.3	6.2	6.2	5.9
⑤	3.3	3.3	2.9	2.9	2.9	0
⑩	5.9	5.9	5.9	6.2	5.8	5.9
⑬	0.4	0.4	0.4	0.4	0.5	0.7
IC312 ②	3.6	0	3.6	3.6	3.6	3.6
④	0	0	0	12.0	0.1	4.5
IC313 ①	0	6.3	0	6.3	6.3	6.3
IC314 ②	0	3.0	7.6	0	3.0	0
④	0	0	0	0	2.9	0.1
IC315 ①	0.4	0.4	0.4	0.4	0.4	0.6
④	0.6	0	0.6	0.6	0.6	0.6
⑨	9.4	9.3	9.3	9.2	9.3	9.4
⑪	2.5	2.5	2.5	2.5	2.5	7.2
⑭	0.4	0.4	0.4	0.4	0.4	0.6
⑮	0.4	0.4	0.4	0.4	0.4	0.6
IC317 ④	2.0	0	2.0	2.1	2.0	12.0
⑤	12.0	0	12.0	12.0	12.0	12.0
⑨	10.7	10.6	10.6	10.6	10.5	10.7
⑭	9.4	9.4	9.4	9.4	9.1	9.4
IC318 ⑤	11.5	11.5	0	11.4	11.4	11.4
IC320 ①	6.3	6.3	6.3	6.3	6.3	0
②	3.0	0	0	3.1	0	0
④	0	0	0	0	3.3	0
IC321 ②	0	0.1	0.1	0	2.9	0
④	0	0	0	0	0.1	2.7
IC322 ⑤	5.8	5.9	6.0	6.3	5.9	5.9
IC323 ⑤	6.2	6.3	6.2	6.2	6.2	5.9
⑦	0	5.6	5.6	5.6	5.6	5.6
IC324 ⑤	6.2	6.2	6.2	6.2	6.2	5.9
IC326 ①	5.9	5.9	6.0	6.3	5.9	5.9
②	5.9	5.9	5.9	6.2	5.8	5.9
③	5.9	5.9	5.9	6.2	5.8	5.9
⑤	1.7	1.9	1.6	1.6	2.1	2.1
⑥	2.4	1.0	2.3	2.3	2.3	4.6
⑦	0	-0.1	10.8	0	-0.1	0
⑧	6.3	6.3	6.3	6.3	6.2	5.9
⑨	6.3	6.3	6.3	6.3	6.2	5.9
⑩	6.3	6.3	6.2	6.2	6.2	5.9

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
IC326 ⑫	6.2	6.2	6.2	6.2	6.2	5.9
⑬	6.2	6.2	6.2	6.3	6.2	5.9
⑭	6.2	6.2	6.2	6.2	6.2	5.9
IC350 ①	6.6	6.5	6.4	6.3	6.1	6.9
②	6.2	6.2	6.2	6.3	6.0	6.4
③	6.2	6.2	6.2	6.3	6.0	6.4
Q300 B	2.5	2.5	2.2	2.2	2.2	2.2
C	10.2	10.2	10.4	10.5	10.4	10.5
E	1.9	1.9	1.6	1.6	1.6	1.6
Q301 E	8.6	8.5	8.2	8.3	8.5	9.8
Q303 E	5.7	5.7	5.7	5.7	5.5	5.7
Q304 B	6.3	6.3	6.3	6.4	6.2	6.3
E	5.7	5.7	5.7	5.7	5.5	5.7
Q305 B	8.6	8.5	8.2	8.3	8.5	9.8
E	7.9	7.9	7.6	7.7	7.9	9.1
Q307 E	1.4	1.4	1.1	1.2	1.4	2.7
Q309 B	1.4	1.4	1.1	1.2	1.4	2.6
C	0.1	0.1	0.2	0.1	0.1	0
E	0.7	1.8	1.7	1.8	0	1.8
Q312 C	8.2	8.2	8.6	8.3	8.3	8.1
Q313 B	8.2	8.2	8.6	8.3	8.2	8.1
E	8.8	8.8	9.3	9.0	8.9	8.7
Q314 B	11.9	6.4	11.9	11.9	11.9	11.9
C	0	11.9	0	0	0	0
Q315 B	3.3	3.2	2.9	3.1	3.2	3.3
E	3.9	3.9	3.5	3.8	3.8	4.0
Q318 B	12.1	12.0	11.7	11.9	12.1	12.1
C	1.0	1.0	1.2	1.0	1.0	0.9
Q322 B	2.4	2.4	2.3	2.3	5.6	2.4
E	1.8	1.8	1.8	1.8	5.0	1.8
Q323 B	5.0	5.0	0	0	0	0
C	0	0	3.5	3.5	3.5	3.6
Q324 B	4.1	4.2	0	0	0	0
C	0	0	0.8	0.8	0.8	0.9
Q328 B	2.2	2.2	2.2	2.2	2.0	1.3
C	2.8	2.8	2.8	2.8	0	0
Q329 D	2.1	2.1	2.2	2.4	0	2.2
G	0	0	1.6	0	2.9	2.8
Q332 B	4.9	5.0	0	4.9	0	0
C	0	0	4.4	0	4.3	4.4
Q333 B	1.7	1.7	1.9	1.8	1.7	1.7
E	1.5	1.5	1.7	1.5	1.5	1.4
Q336 G	4.7	4.6	4.6	4.7	4.2	4.8
D	4.3	4.3	4.3	4.3	4.5	4.3
Q339 B	12.3	12.5	12.5	12.4	12.5	12.3
Q347 B	0.1	4.2	0.1	0.1	0.6	0.1
C	9.4	0.1	9.4	9.4	9.4	9.4
Q349 B	2.8	2.7	2.7	2.7	2.2	2.8
E	3.4	3.3	3.4	3.4	2.8	3.4
Q354 B	12.0	0.6	0	0	0	0
E	12.0	0.4	0	0	0	-0.2
Q358 E	2.2	2.2	0	2.2	2.2	2.2
Q360 1	6.2	6.2	6.2	6.3	6.1	6.4
3	6.2	6.2	6.2	6.3	6.0	6.4
5	1.3	4.7	2.2	4.1	5.3	3.8
Q361 B	4.9	4.9	5.0	5.0	5.0	0.8
C	0.1	0	0	0	0.1	4.9
Q362 C	9.0	9.0	9.0	9.5	9.2	8.5
Q364 C	3.3	3.3	2.9	2.9	2.8	2.9
Q365 B	0.4	0	0.3	0.3	0.4	0.4
Q369 B	0.8	0.9	0.8	0.8	0.9	4.9
Q372 B	0	0	0	0	0	4.9
C	11.7	11.7	11.8	11.8	11.7	0
Q374 B	10.4	10.3	10.1	10.3	10.7	6.4
C	0	0	0	0	6.2	6.7
E	6.4	6.4	6.3	6.3	6.1	6.7
Q375 B	10.7	10.8	10.7	10.7	10.7	5.9
C	0	0	0	0	6.3	6.4
E	6.2	6.2	6.2	6.2	6.0	6.4

A BOARD (2/3) * MARK LIST

	PVM-20M4U/E/A	PVM-20M2U/E
C525	0.0115 2kV : PP	0.012 2kV : PP
C1524	100	#
C1525	0.0047 2kV E	#
C1531	0.1 25V B :CHIP	#
C1532	47 25V	#
C1534	47 25V	#
C1535	47 25V	#
C1536	0.1 :MPS	#
C1537	0.33 100V :MPS	#
CN509	3P WHT :S-MICRO	#
D544	MA111	#
D545	MA111	#
D546	V11N	#
D548	RD16ESB2	#
IC511	LA6500-FA	#
IC512	NJM79M12FA	#
L506	1-459-087-00	1-459-104-00
L509	1-459-087-00	1-459-104-00
Q526	2SC4686A	#
Q527	2SC4686A	#
Q531	2SA1037K	#
Q532	IRF520	#
R562	47 1/4W : FPRD	22 1/4W : FPRD
R566	47k : RN-CP	27k : RN-CP
R574	47k : CHIP	#
R577	10k : CHIP	#
R581	1k : CHIP	#
R584	3.9k : CHIP	10k : CHIP
R1506	1k : CHIP	470 : CHIP
R1539	100k : CHIP	#
R1542	22 : FPRD	#
R1564	560 : RN-CP	#
R1580	27k : CHIP	#
R1581	10M 1W : RS	#
R1582	2M 1W : RS	#
R1583	470 1/2W : RF	#
R1584	9.1k : RN-CHIP	#
R1585	1.8k : CHIP	#
R1586	47k : RN-CHIP	#
R1587	2.2k : CHIP	#
R1588	2.2 : CHIP	#
R1590	10 : CHIP	#
R1591	0.47 : FPRD	#
R1592	4.7k 1/2W : FPRD	#
R1593	8.2 1/2W : FPRD	#
R1594	8.2 1W : RS	#
R1599	10k 1/2W : RC	#
R2506	150k : CHIP	120k : CHIP
R2507	330k : CHIP	220k : CHIP

: Not Used

A BOARD IC303 CXA1214P

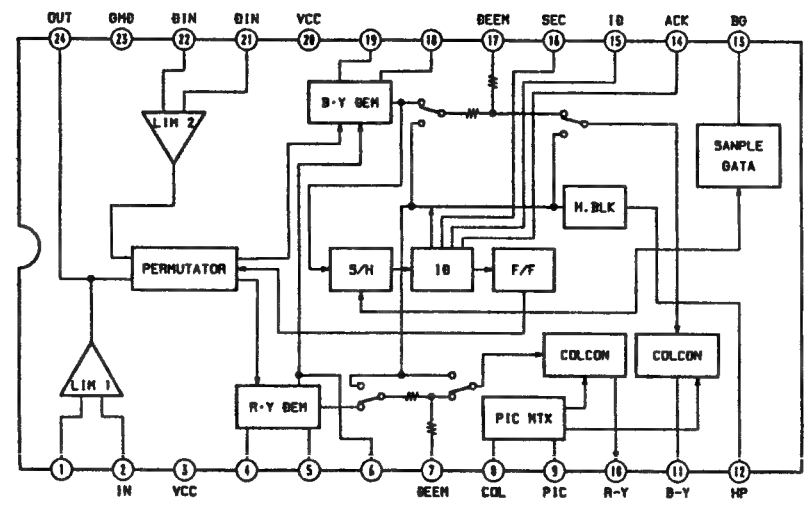

A BOARD IC305 M51279FP

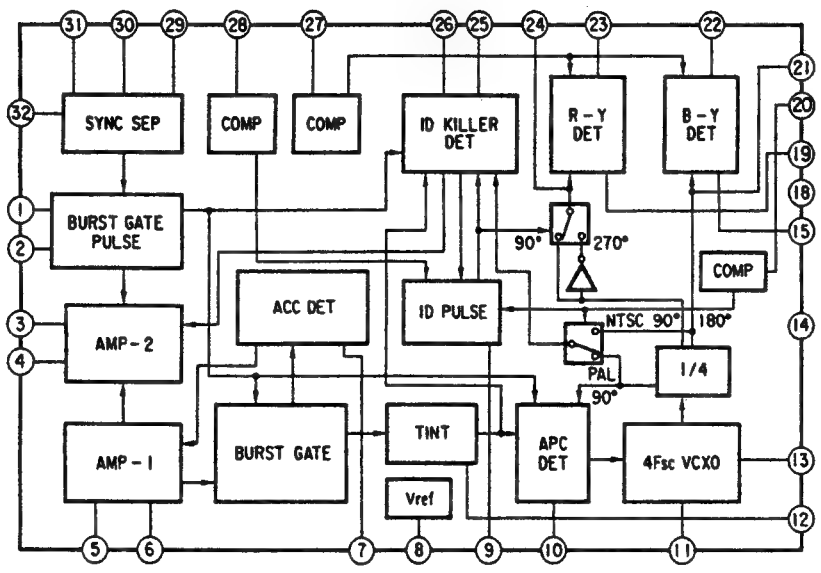

·A BOARD WAVEFORMS

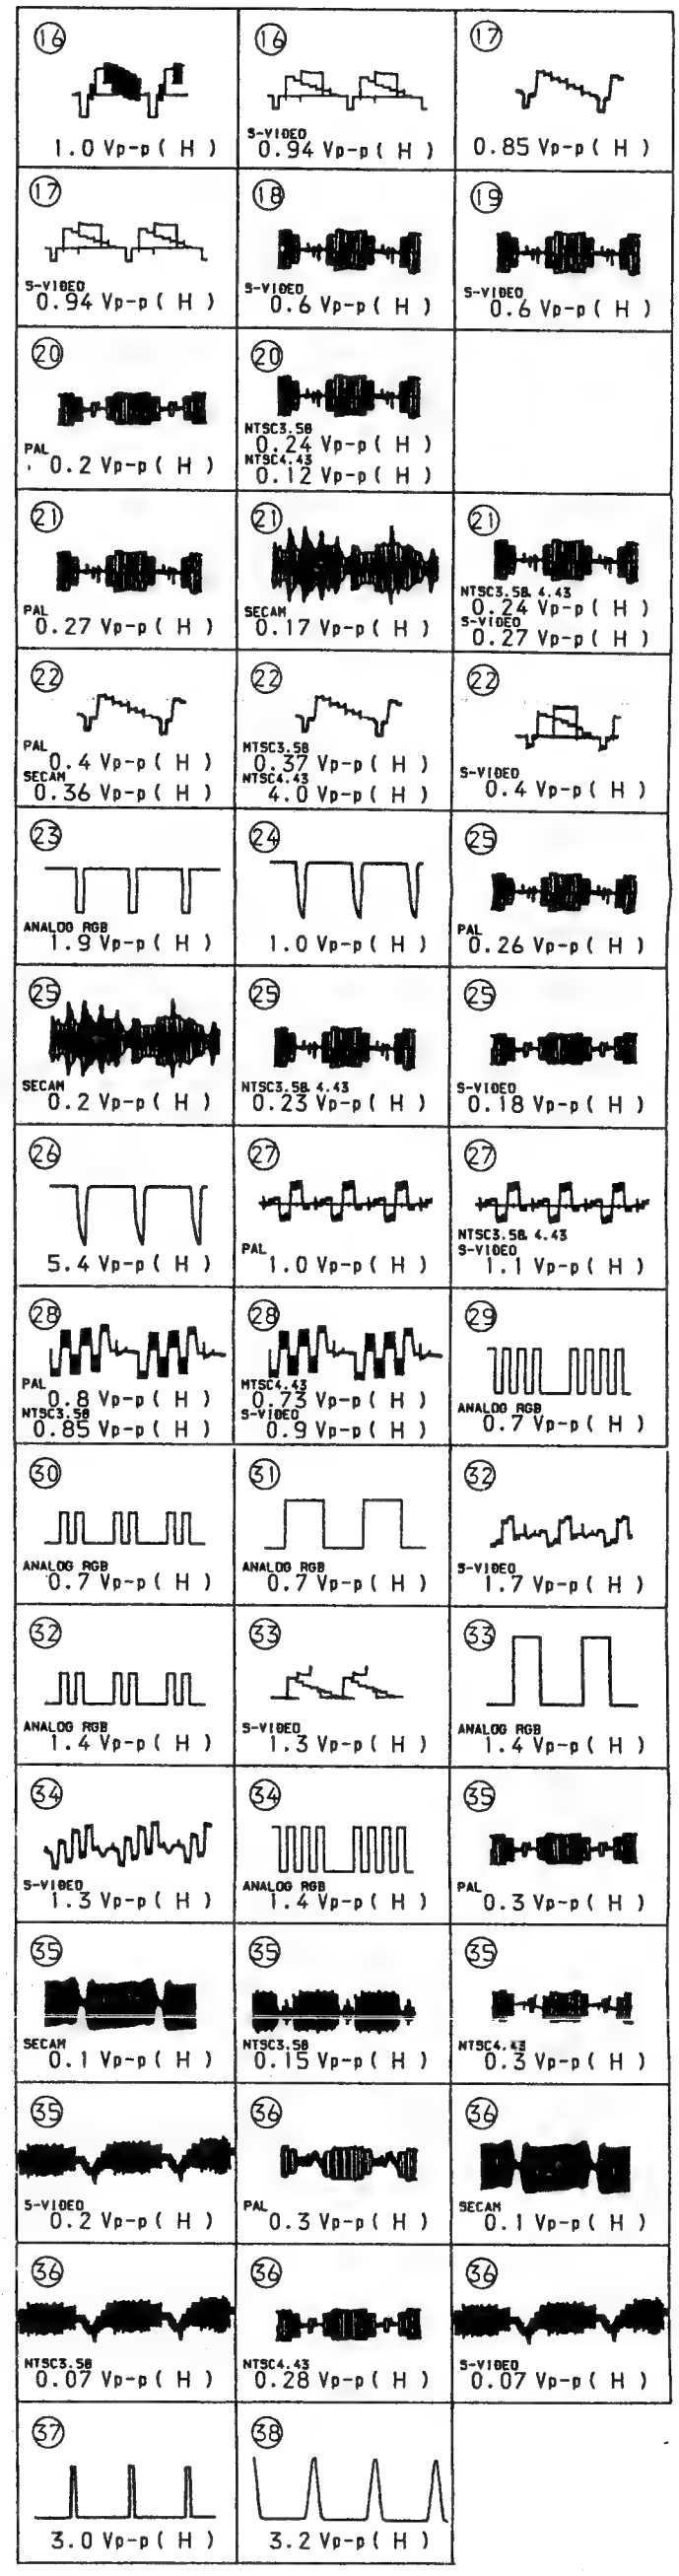

MS

94 Vp-p (H)	⑰ 0.85 Vp-p (H)
6 Vp-p (H)	⑲ S-VIDEO 0.6 Vp-p (H)
24 Vp-p (H) 2 Vp-p (H)	
7 Vp-p (H)	㉑ NTSC3.58 4.43 0.24 Vp-p (H) S-VIDEO 0.27 Vp-p (H)
37 Vp-p (H) 0 Vp-p (H)	㉒ S-VIDEO 0.4 Vp-p (H)
0 Vp-p (H)	㉕ PAL 0.26 Vp-p (H)
23 Vp-p (H)	㉕ S-VIDEO 0.18 Vp-p (H)
0 Vp-p (H)	㉗ NTSC3.58 4.43 S-VIDEO 1.1 Vp-p (H)
73 Vp-p (H) 9 Vp-p (H)	㉙ ANALOG RGB 0.7 Vp-p (H)
7 Vp-p (H)	㉜ S-VIDEO 1.7 Vp-p (H)
3 Vp-p (H)	㉝ ANALOG RGB 1.4 Vp-p (H)
4 Vp-p (H)	㉟ PAL 0.3 Vp-p (H)
15 Vp-p (H)	㉟ NTSC4.43 0.3 Vp-p (H)
.3 Vp-p (H)	㊱ SECAM 0.1 Vp-p (H)
28 Vp-p (H)	㊱ S-VIDEO 0.07 Vp-p (H)
.2 Vp-p (H)	

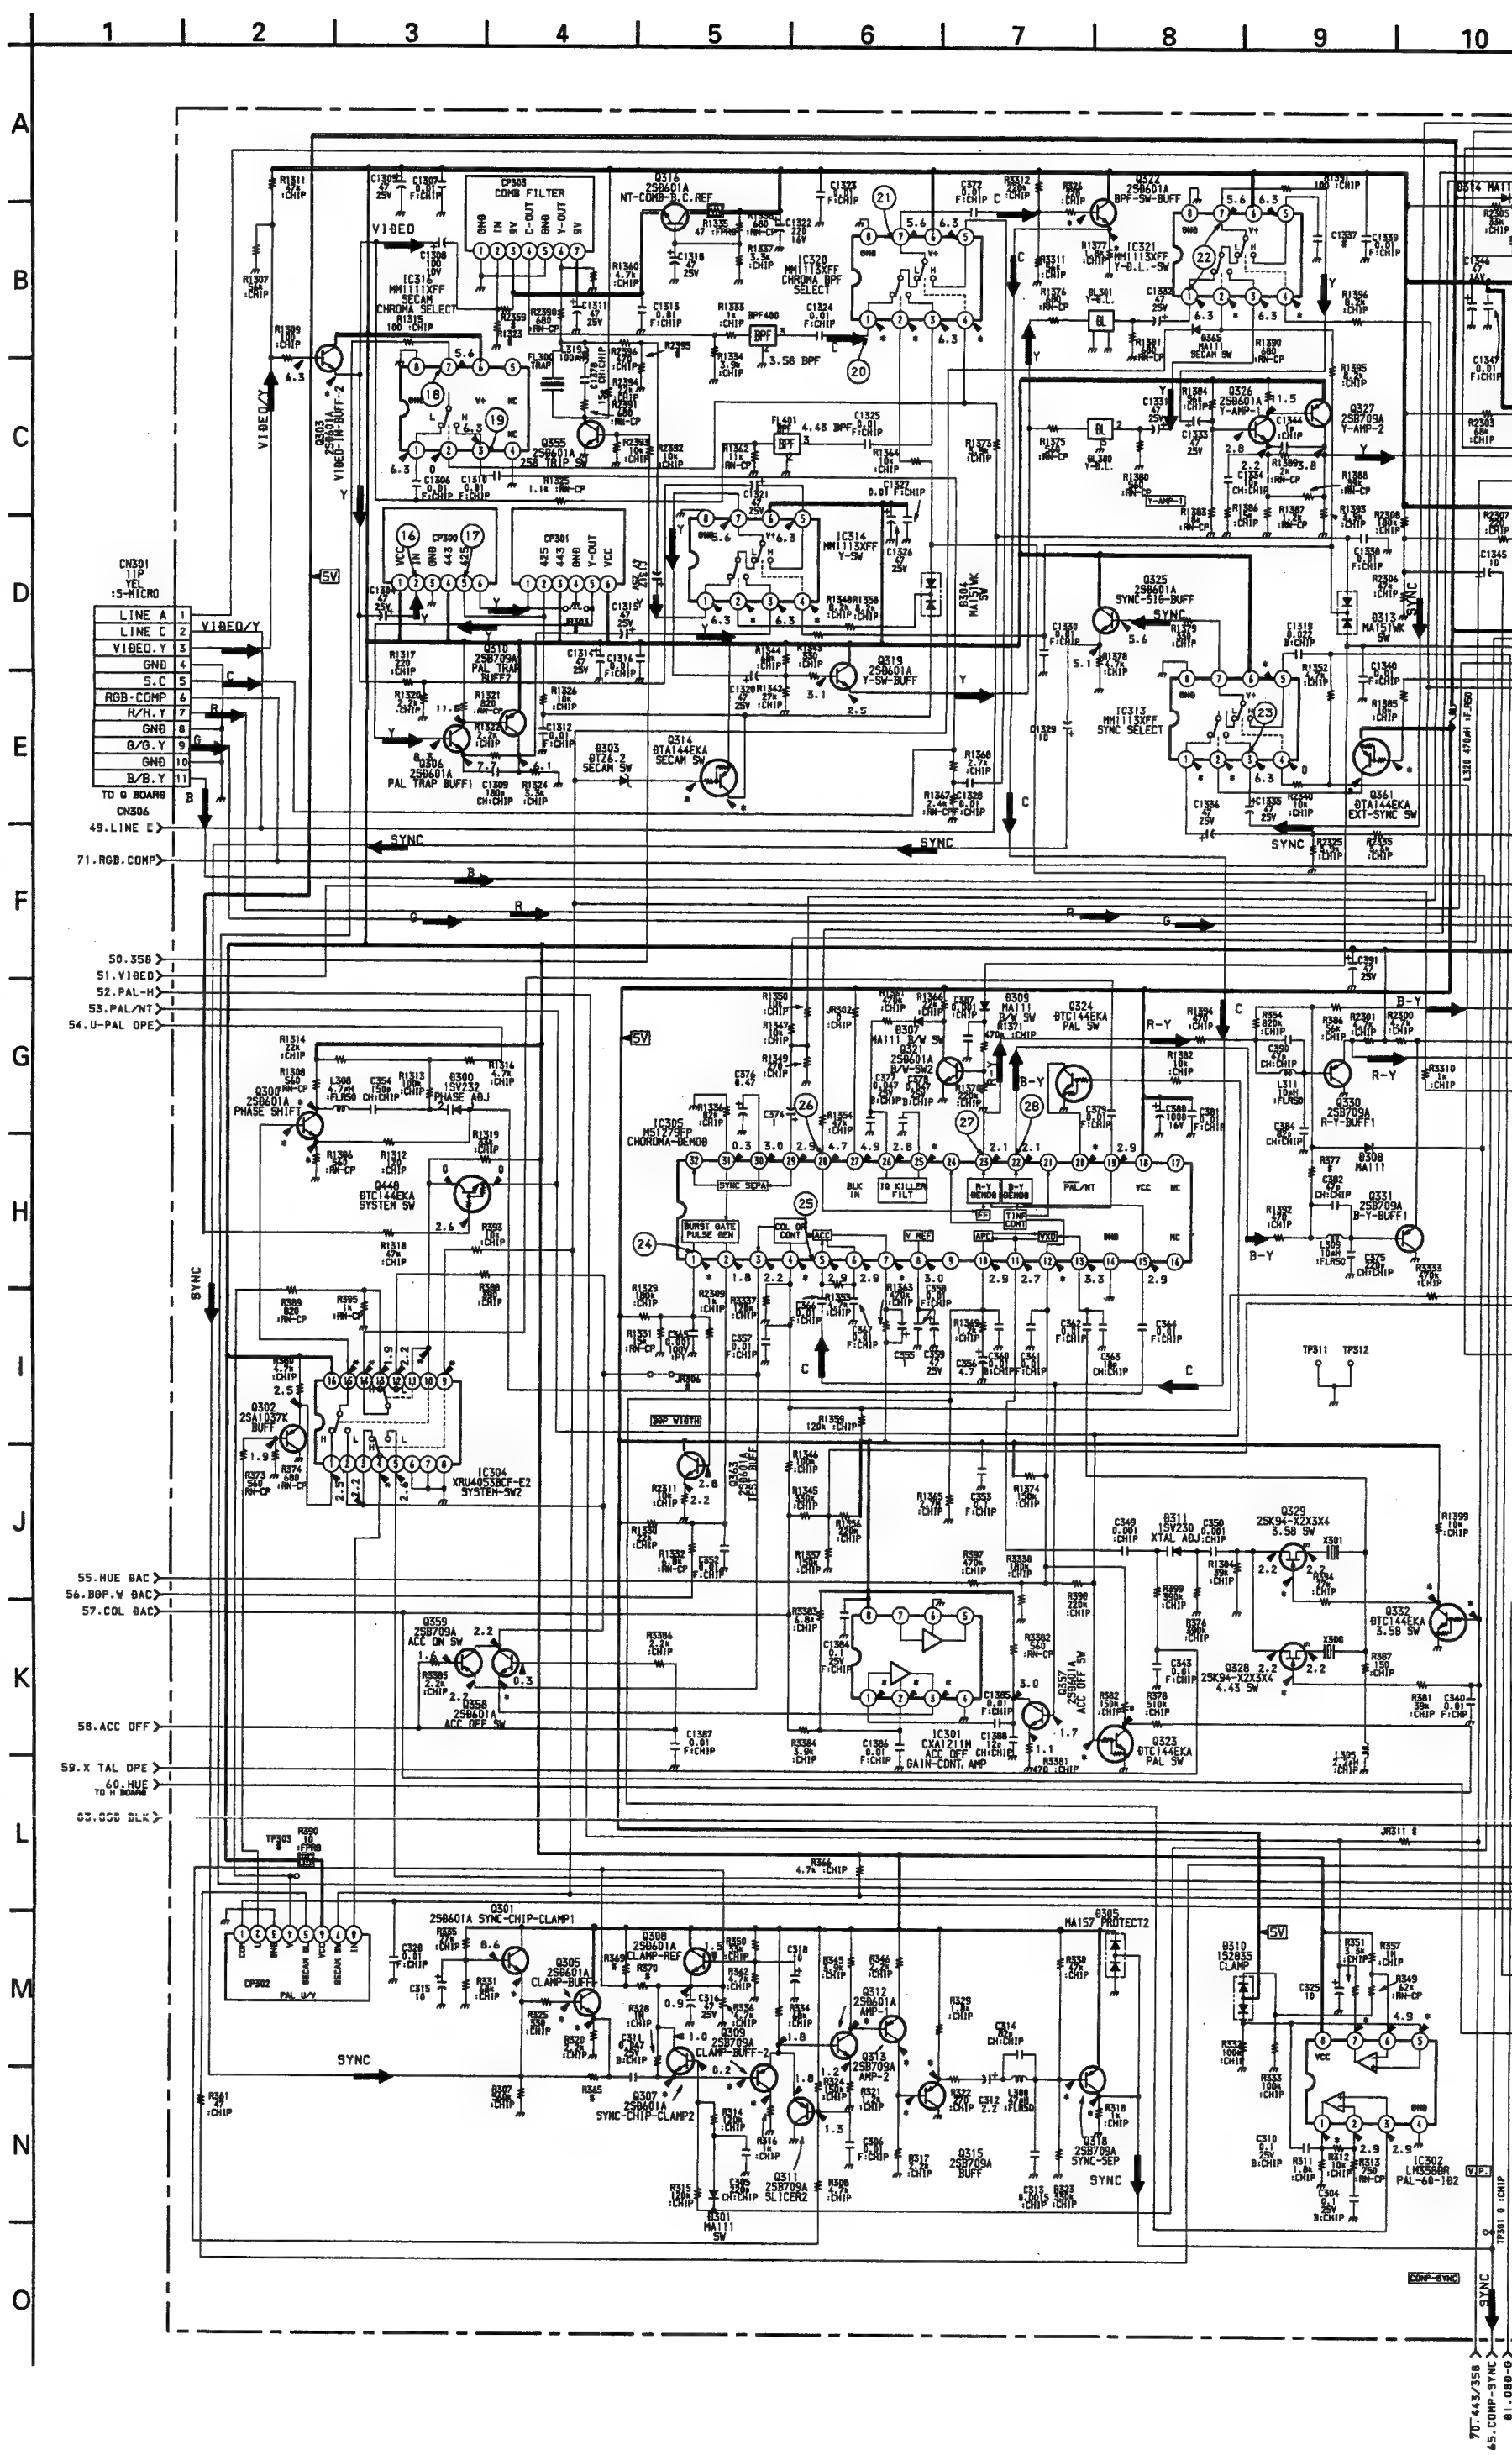

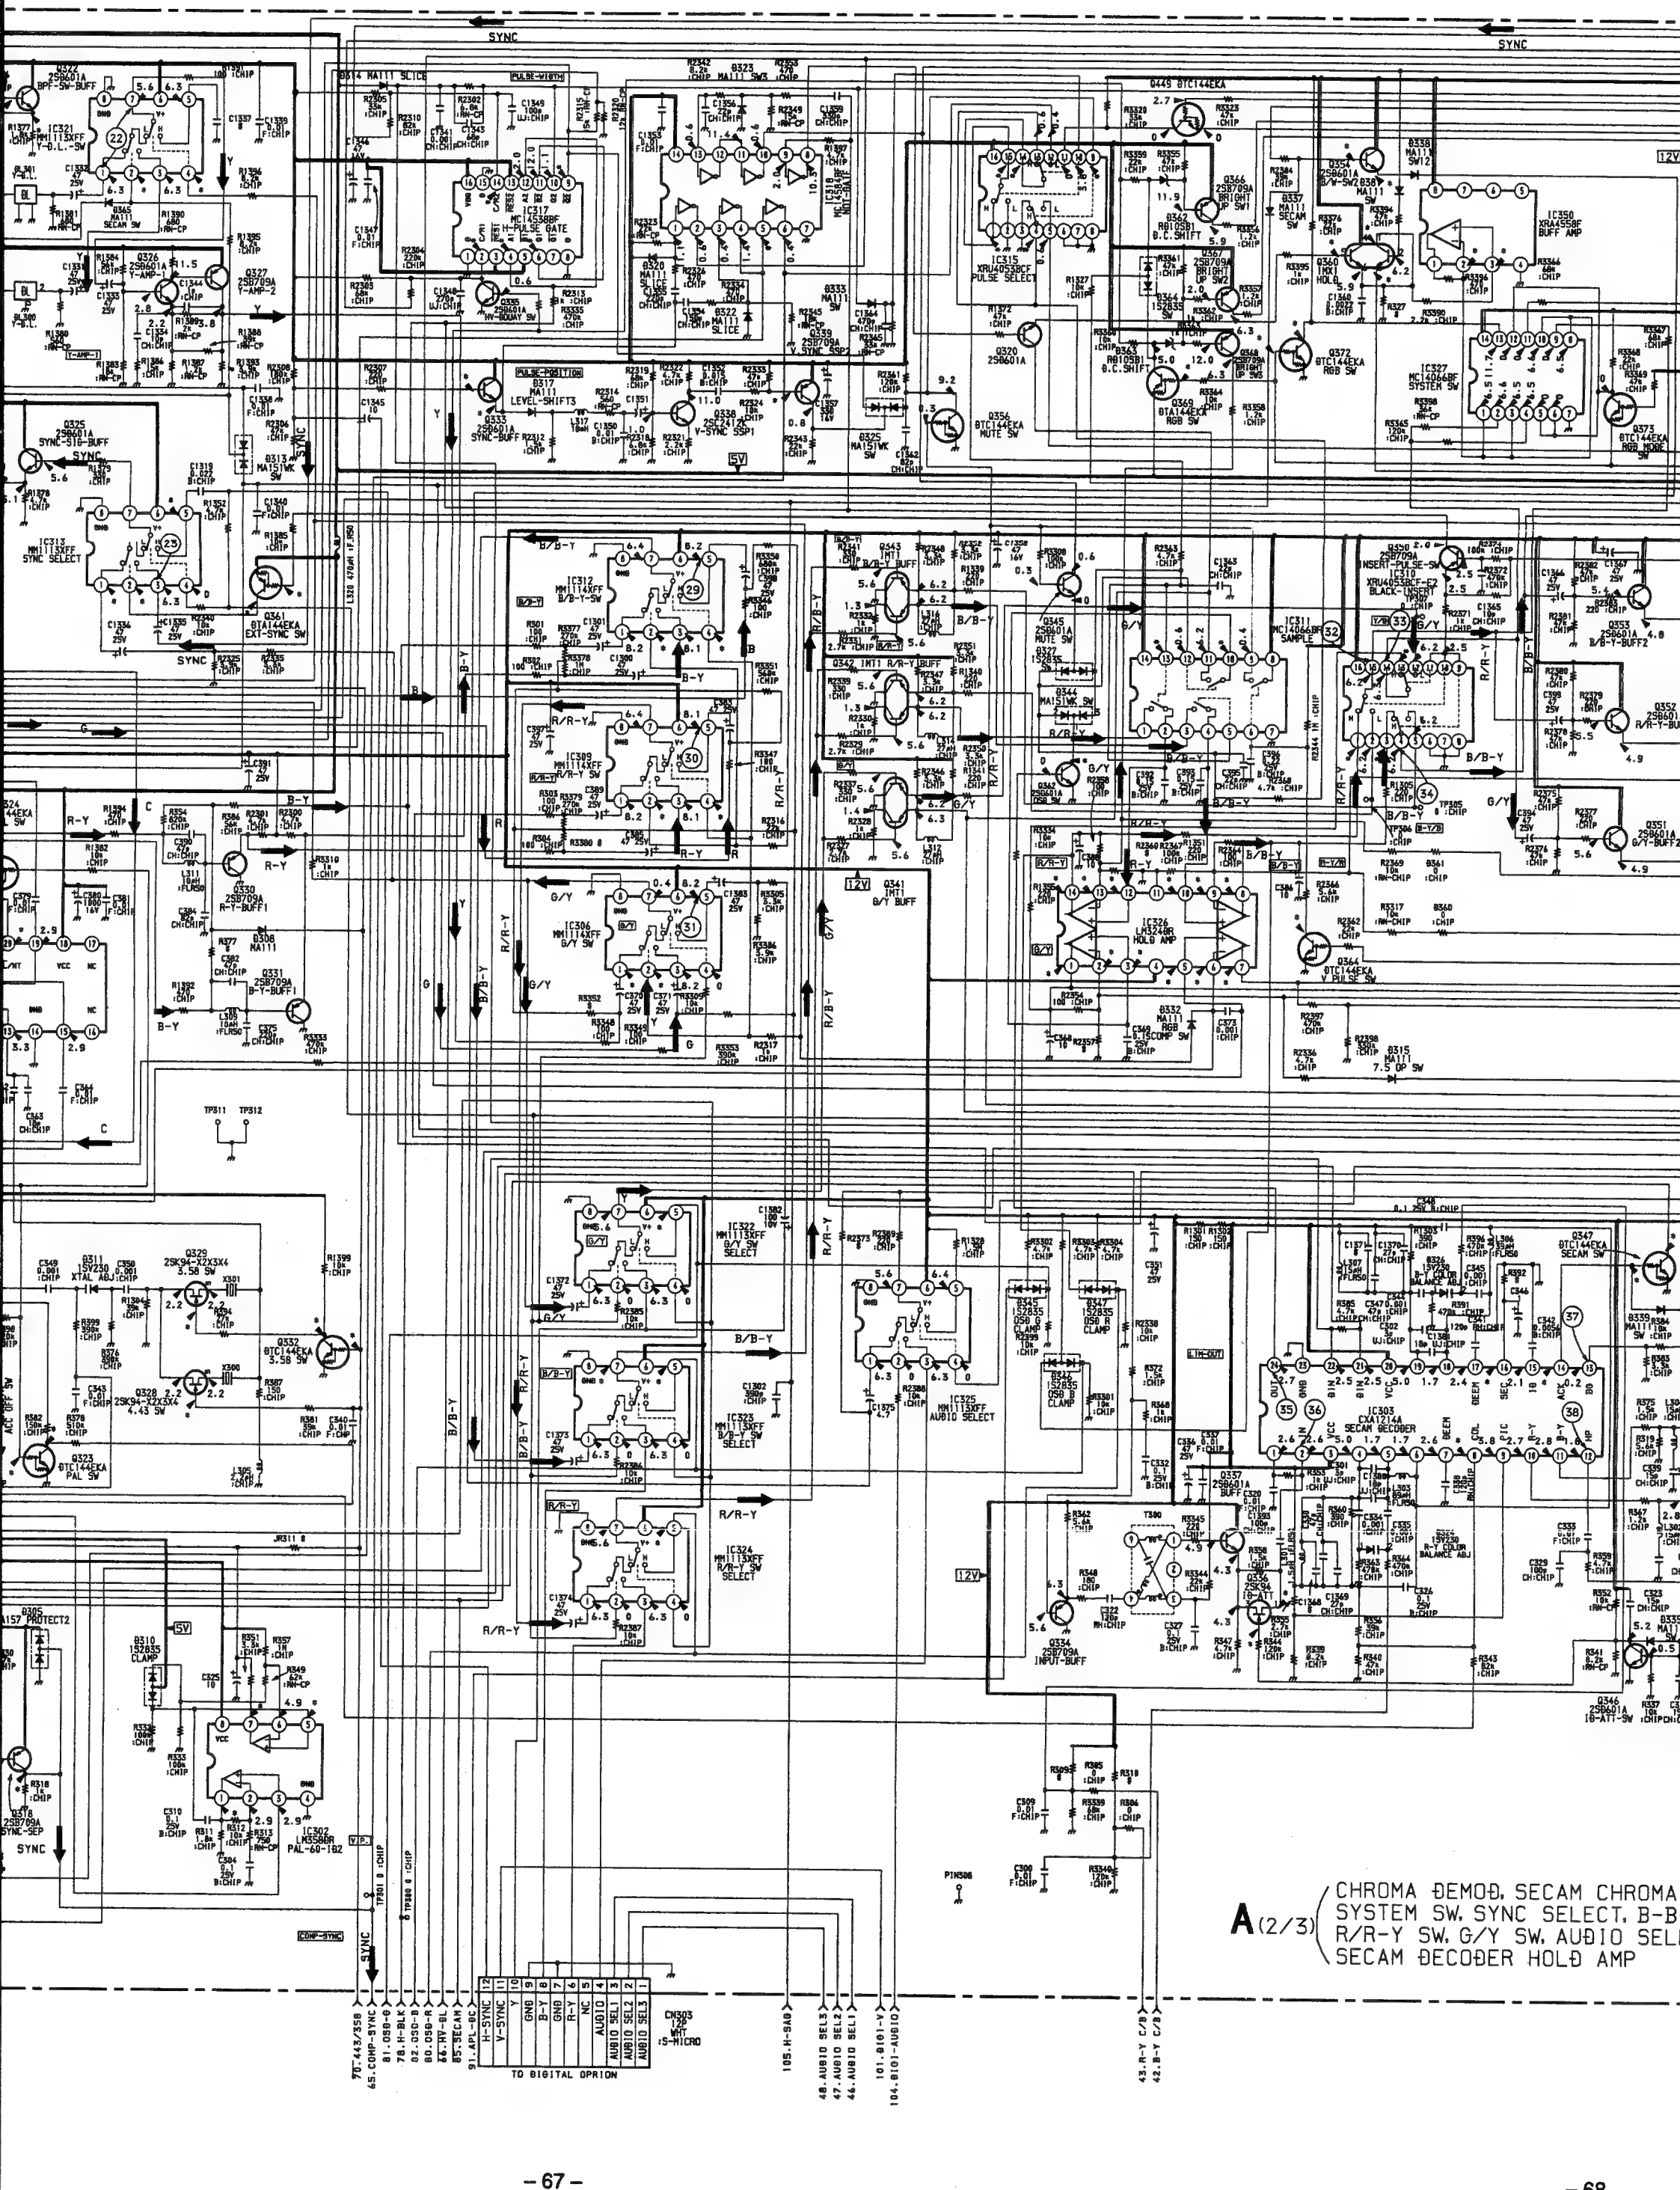
SYNC
IC321 MM1113XFF Y-D.L.-SW
Q322 2SB601A BPF-SW-BUFF
Q326 2SB601A Y-AMP-1
Q327 2SB709A Y-AMP-2
IC317 MC14538BF PULSE GATE
Q317 MA111 LEVEL-SHIFT3
Q333 2SB601A SYNC-BUFF
Q338 2SC2412K V-SYNC SSP1
Q339 2SB709A V.SYNC SSP2
Q355 2SB601A VV-BOUAY SW
Q320 2SB601A
Q356 BTC144EKA MUTE SW
Q325 MA151WK SW
IC315 XRU4053BCF PULSE SELECT
Q362 RB105B1 D.C.SHIFT
Q363 RB105B1 D.C.SHIFT
Q366 2SB709A BRIGHT UP SW1
Q367 2SB709A BRIGHT UP SW2
Q368 2SB709A BRIGHT UP SW3
Q369 BTA144EKA RGB SW
Q372 BTC144EKA RGB SW
IC327 MC14066BF SYSTEM SW
Q373 BTC144EKA RGB MODE SW
IC350 XRA4558F BUFF AMP
Q354 2SB601A B/W-SW2
Q360 MX1 HOLD
Q313 MA151WK SW
IC313 MM1113XFF SYNC SELECT
Q325 2SB601A SYNC-SIG-BUFF
Q361 BTA144EKA EXT-SYNC SW
IC312 MM1114XFF B/B-Y-SW
IC309 MM1114XFF R/R-Y SW
IC306 MM1114XFF G/Y SW
Q343 INT1 B/B-Y BUFF
Q342 INT1 R/R-Y BUFF
Q341 INT1 G/Y BUFF
Q345 2SB601A MUTE SW
Q344 MA151WK SW
Q342 2SB601A MUTE SW
IC311 MC14066BF SAMPLE
IC310 XRU4053BCF-E2 BLACK-INSERT
Q350 2SB709A INSERT-PULSE-SW
Q353 2SB601A B/B-Y-BUFF2
Q352 2SB601A R/R-Y-BUFF2
Q351 2SB601A G/Y-BUFF2
IC326 LM324QR HOLD AMP
Q364 BTC144EKA V PULSE SW
Q332 BTC144EKA 3.58 SW
Q329 2SK94-X2X3X4 3.58 SW
Q328 2SK94-X2X3X4 4.43 SW
Q323 BTC144EKA PAL SW
IC322 MM1113XFF G/Y SW SELECT
IC323 MM1113XFF B/Y SW SELECT
IC324 MM1113XFF R/R-Y SW SELECT
IC325 MM1113XFF AUDIO SELECT
IC303 CXA1214A SECAM DECODER
Q347 BTC144EKA SECAM SW
Q339 MA111 SECAM SW
Q330 2SB709A R-Y-BUFF1
Q331 2SB709A B-Y-BUFF1
Q308 MA111
Q334 2SB709A INPUT-BUFF
Q337 2SB601A BUFF
Q336 2SK94 10-ATT
Q346 2SB601A 10-ATT-SW
Q315 MA111 7.5 OP SW
Q332 MA111 RGB SW
Q310 1S2835 CLAMP
IC302 LM3560R PAL-60-182
CN303 12P WHT S-MICRO
TO BIGITAL OPRION
12V
5V
A(2/3) CHROMA ĐEMOĐ, SECAM CHROMA SYSTEM SW, SYNC SELECT, B-Y R/R-Y SW, G/Y SW, AUĐIO SEL SECAM ĐECOĐER HOLĐ AMP

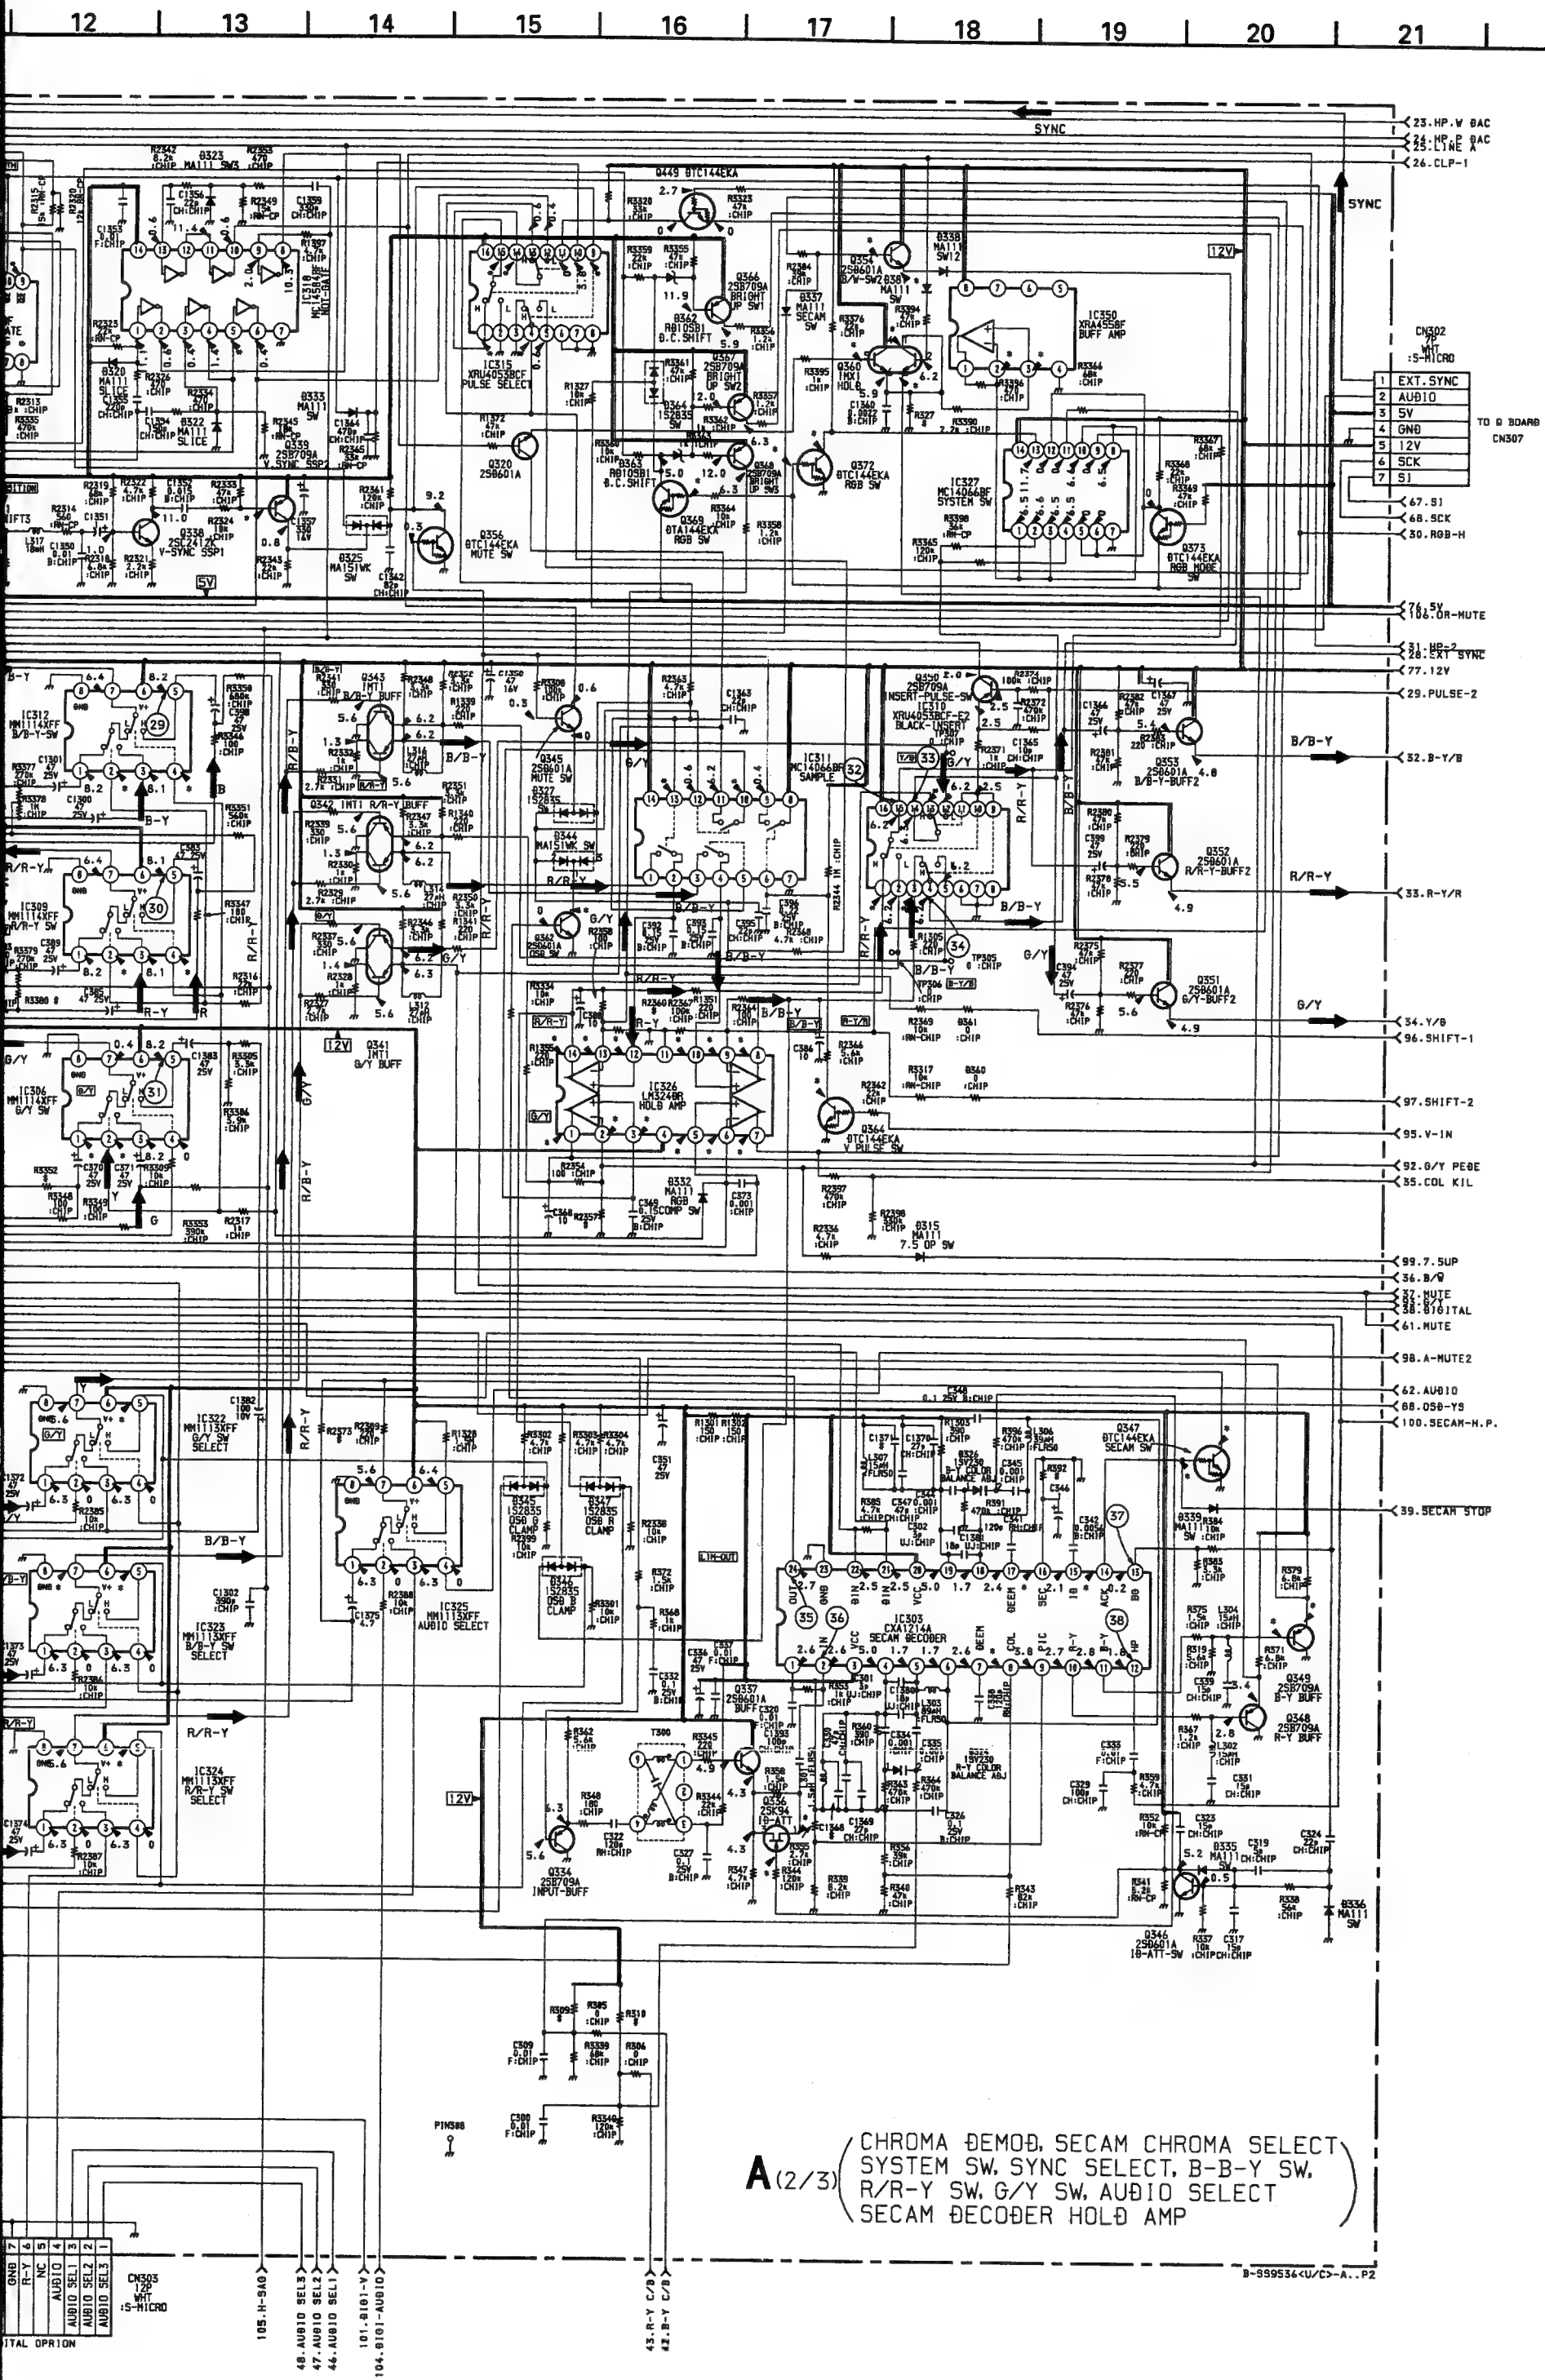
12
13
14
15
16
17
18
19
20
21
22
SYNC
12V
5V
23.HP.W BAC
24.HP.P BAC
25.LINE A
26.CLP-1
CN302
7P
WHT
:S-MICRO
1 EXT.SYNC
2 AUDIO
3 5V
4 GND
5 12V
6 SCK
7 SI
TO G BOARD
CN307
67.SI
68.SCK
30.RGB-H
76.5V
106.OR-MUTE
31.HP-2
28.EXT SYNC
77.12V
29.PULSE-2
32.B-Y/B
33.R-Y/R
34.Y/G
96.SHIFT-1
97.SHIFT-2
95.V-IN
92.G/Y PEDE
35.COL KIL
99.7.5UP
36.B/B
37.MUTE
93.G/Y
38.DIGITAL
61.MUTE
98.A-MUTE2
62.AUDIO
88.DSO-YS
100.SECAM-H.P.
39.SECAM STOP
IC315 XRU40538CF PULSE SELECT
IC350 XRA4558F BUFF AMP
IC327 MC14044BF SYSTEM SW
IC326 LM3248R HOLD AMP
IC303 CXA1214A SECAM DECODER
IC312 MM1114XFF B/B-Y-SW
IC309 MM1114XFF R/R-Y SW
IC306 MM1114XFF G/Y SW
IC322 MM1113XFF G/Y SW SELECT
IC323 MM1113XFF B/B-Y SW SELECT
IC324 MM1113XFF R/R-Y SW SELECT
IC325 MM1113XFF AUDIO SELECT
IC310 XRU4053BCF-E2 BLACK-UNSERT
IC311 MC14066BF SAMPLE
Q449 DTC144EKA
Q354 2SB601A W-SW
Q366 2SB709A BRIGHT UP SW1
Q367 2SB709A BRIGHT UP SW2
Q368 2SB709A BRIGHT UP SW3
Q362 RB105B1 D.C.SHIFT
Q363 RB105B1 D.C.SHIFT
Q364 1S2835 SW
Q360 IMX1 HOLD
Q372 DTC144EKA RGB SW
Q369 DTA144EKA RGB SW
Q373 DTC144EKA RGB MODE SW
Q320 2SB601A
Q356 DTC144EKA MUTE SW
Q336 2SC2412K V-SYNC SSP1
Q339 2SB709A V.SYNC SSP2
Q350 2SB709A INSERT-PULSE-SW
Q345 2SB601A MUTE SW
Q342 INT1 R/R-Y BUFF
Q343 INT1 B/B-Y BUFF
Q341 INT1 G/Y BUFF
Q352 2SB601A R/R-Y-BUFF2
Q353 2SB601A B/B-Y-BUFF2
Q351 2SB601A G/Y-BUFF2
Q347 DTC144EKA SECAM SW
Q349 2SB709A B-Y BUFF
Q348 2SB709A R-Y BUFF
Q334 2SB709A INPUT-BUFF
Q356 2SK94 18-ATT
Q346 2SB601A 18-ATT-SW
Q364 DTC144EKA V PULSE SW
Q337 2SB601A BUFF
Q339 2SB709A V.SYNC SSP2
Q325 MA151WK SW
Q333 MA111 SW
Q338 MA111 SW12
Q337 MA111 SECAM SW
Q315 MA111 7.5 OP SW
Q332 MA111 RGB D.SCOMP SW
Q335 MA111 SW
Q339 MA111 SW
Q344 MA151WK SW
Q320 MA111 SLICE
Q322 MA111 SLICE
CN303
12P
WHT
:S-MICRO
105.H-SAG
48.AUDIO SEL3
47.AUDIO SEL2
46.AUDIO SEL1
101.B101-Y
104.B101-AUDIO
43.R-Y C/B
42.B-Y C/B
PIN508
ITAL OPRION
GND
R-Y
NC
AUDIO
AUDIO SEL1
AUDIO SEL2
AUDIO SEL3
A(2/3) CHROMA DEMOD, SECAM CHROMA SELECT
SYSTEM SW, SYNC SELECT, B-B-Y SW,
R/R-Y SW, G/Y SW, AUDIO SELECT
SECAM DECODER HOLD AMP
B-SS9536<U/C>-A..P2

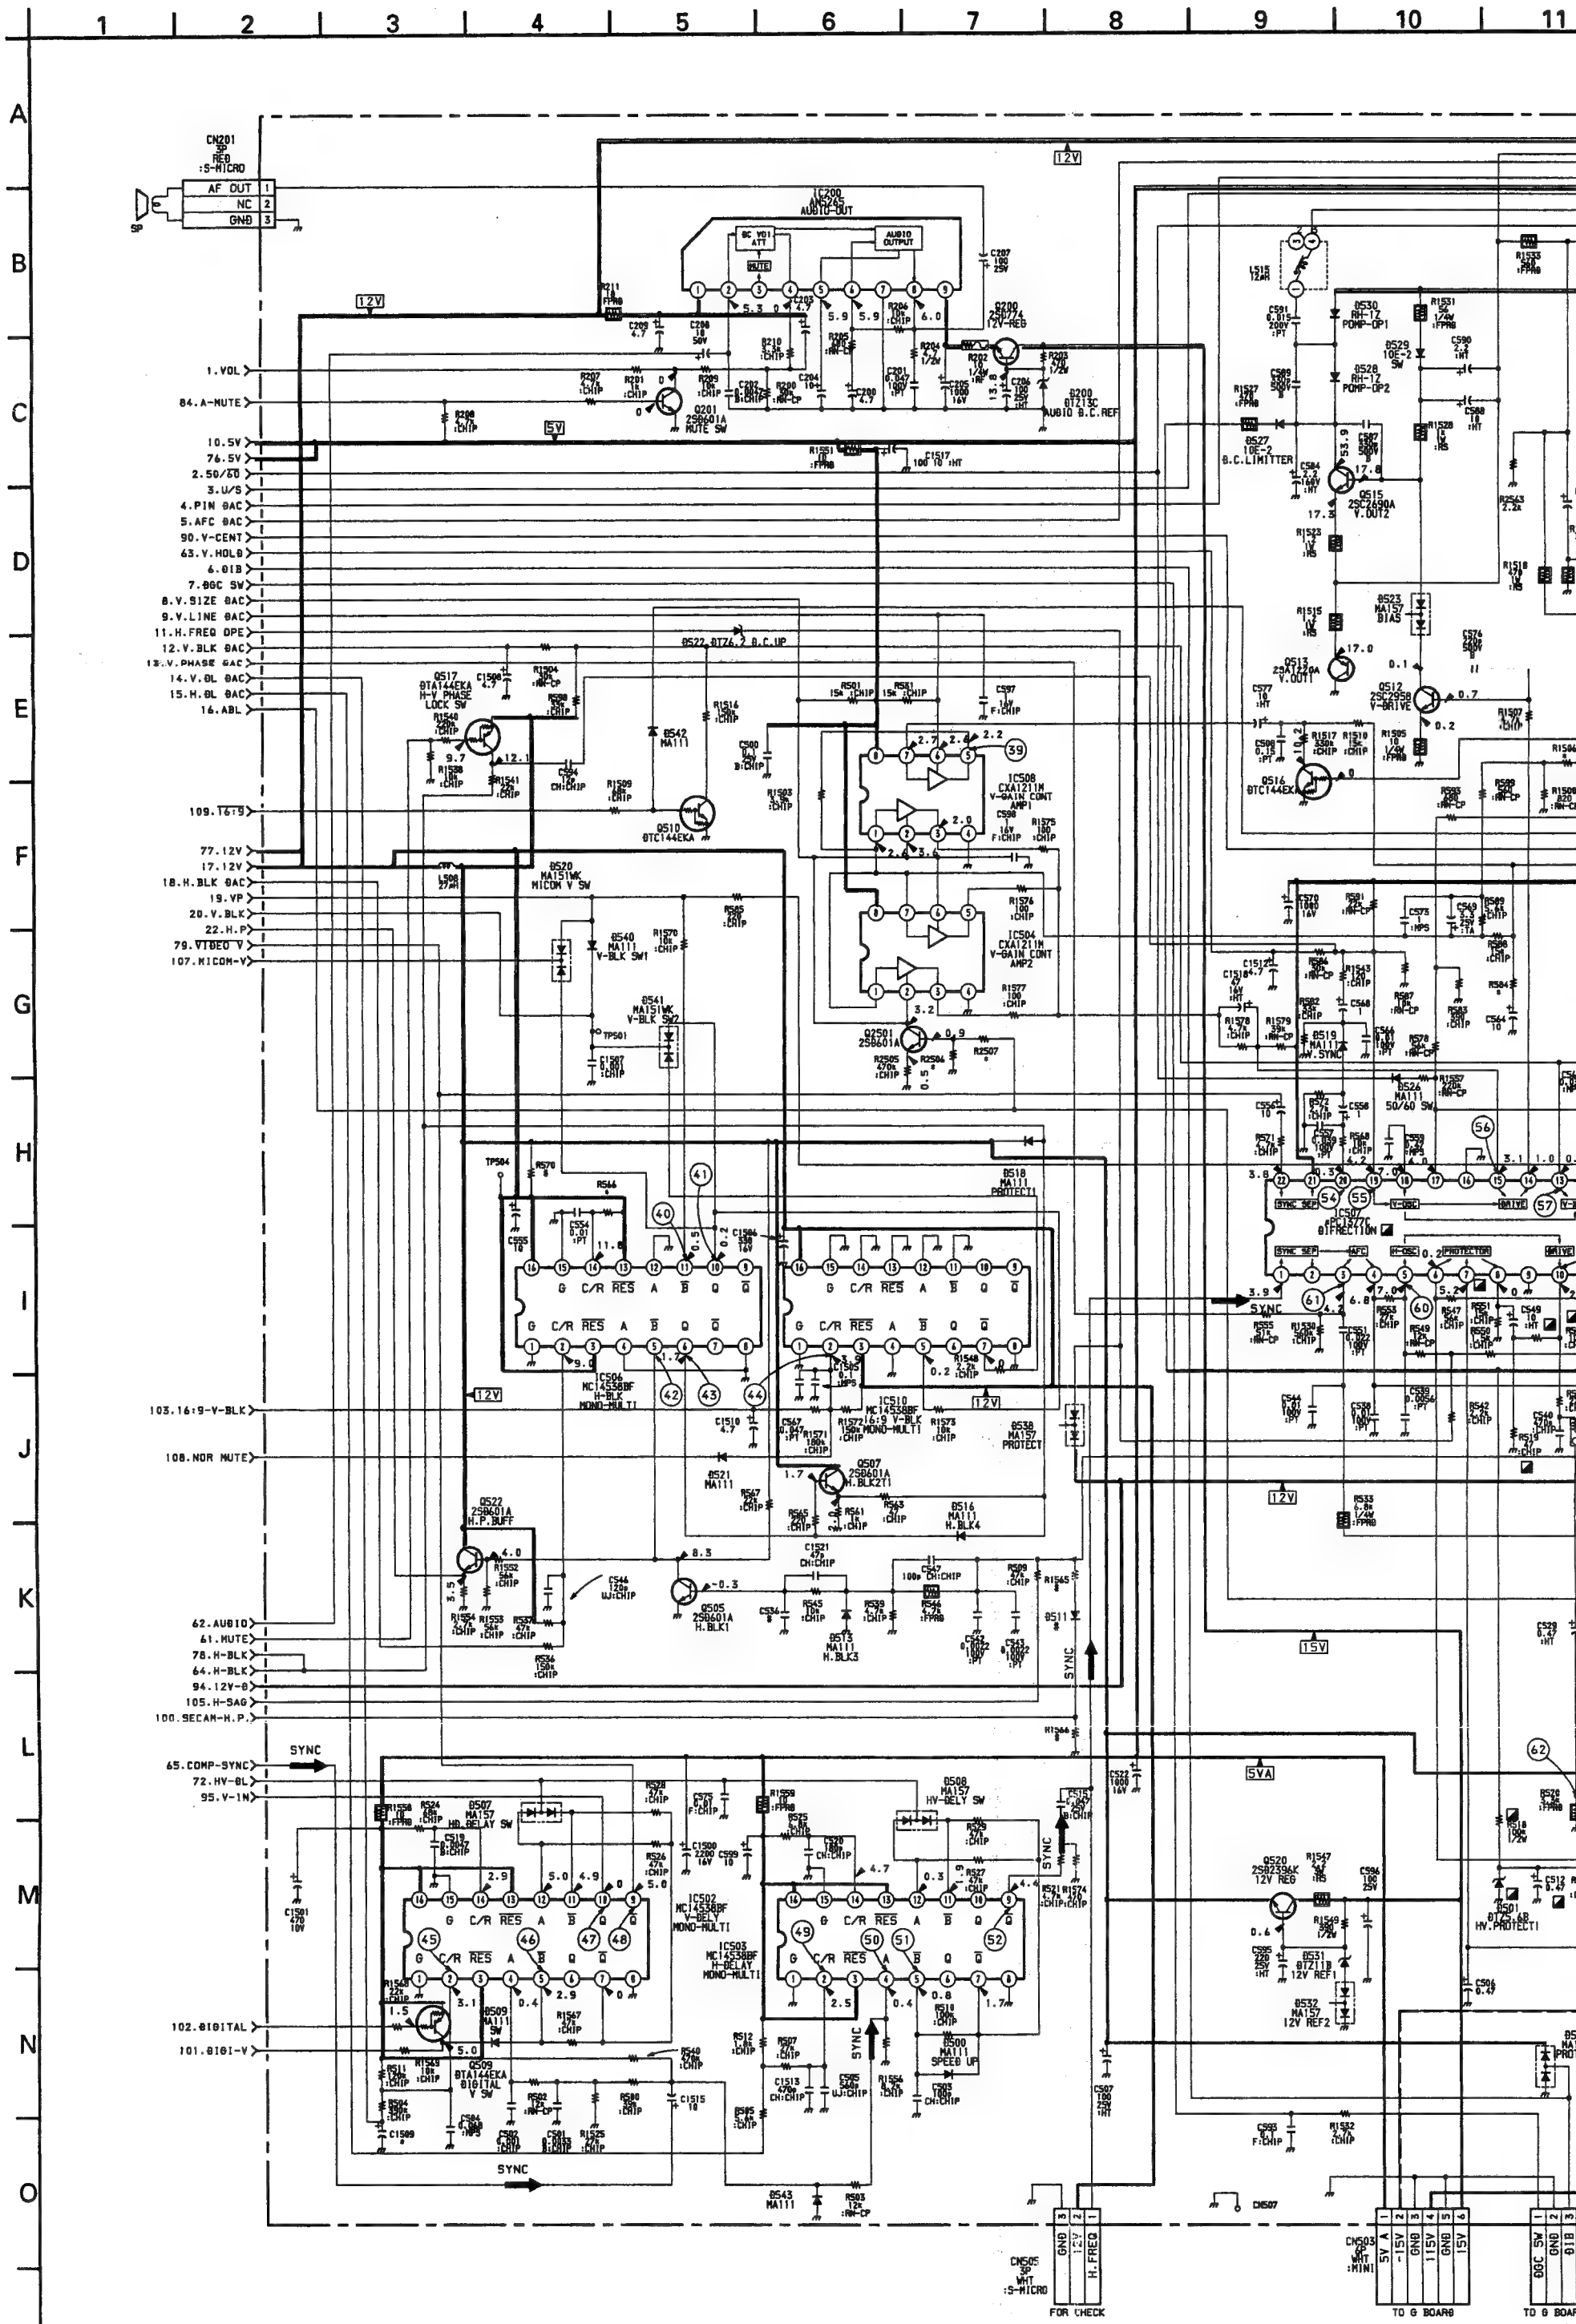
CN201
SP
RED
:5-MICRO
AF OUT 1
NC 2
GND 3
SP
IC200
AN5265
AUDIO OUT
12V
5V
1.VOL
84.A-MUTE
10.5V
76.5V
2.50/60
3.U/S
4.PIN 9AC
5.AFC 9AC
90.V-CENT
63.V.HOLD
6.BIB
7.BGC SW
8.V.SIZE 9AC
9.V.LINE 9AC
11.H.FREQ DPE
12.V.BLK 9AC
13.V.PHASE 9AC
14.V.BL 9AC
15.H.BL 9AC
16.ABL
109.16:9
77.12V
17.12V
18.H.BLK 9AC
19.VP
20.V.BLK
22.H.P
79.VIDEO V
107.MICOM-V
103.16:9-V-BLK
108.NOR MUTE
62.AUDIO
61.MUTE
78.H-BLK
64.H-BLK
94.12V-D
105.H-SAG
100.SECAM-H.P.
65.COMP-SYNC
72.HV-BL
95.V-IN
102.DIGITAL
101.DIGI-V
Q201 2SB601A MUTE SW
Q517 DTA144EKA H-V PHASE LOCK SW
Q510 DTC144EKA
Q522 2SB601A H.P.BUFF
Q505 2SB601A H.BLK1
Q507 2SB601A H.BLK2
Q501 2SB601A
Q509 DTA144EKA DIGITAL V SW
Q200 2SD774 12V-REG
Q515 2SC2690A V.OUT2
Q513 2SA1220A V.OUT1
Q512 2SC2958 V-DRIVE
Q516 DTC144EKA
Q520 2SB2394K 12V REG
D522 DTZ6.2 B.C.UP
D542 MA111
D540 MA111 V-BLK SW1
D541 MA151WK V-BLK SW2
D520 MA151WK MICOM V SW
D530 RH-1Z POMP-UP1
D528 RH-1Z POMP-UP2
D527 10E-2 B.C.LIMITTER
D523 MA157 BIAS
D519 MA111 V.SYNC
D524 MA111 50/60 SW
D518 MA111 PROTECT1
D521 MA111
D538 MA157 PROTECT
D516 MA111 H.BLK4
D513 MA111 H.BLK3
D511
D507 MA157 HD.DELAY SW
D508 MA157 HV-DELY SW
D509 MA111 SW
D500 MA111 SPEED UP
D543 MA111
D531 DTZ11B 12V REF1
D532 MA157 12V REF2
D501 DTZ5.6B HV.PROTECT1
IC508 CXA1211M V-GAIN CONT AMP1
IC504 CXA1211M V-GAIN CONT AMP2
IC506 MC14538BF H-BLK MONO-MULTI
IC510 MC14538BF 16:9 V-BLK MONO-MULTI
IC502 MC14538BF V-DELY MONO-MULTI
IC503 MC14538BF H-DELAY MONO-MULTI
IC507 MC1377G DEFLECTION
SYNC SEP
AFC
H-OSC
PROTECTOR
DRIVE
V-OSC
SYNC
CN505 3P WHT :5-MICRO
GND
12V
H.FREQ
FOR CHECK
CN507
CN503 5P WHT :MINI
5V A
-15V
GND
115V
GND
15V
TO G BOARD CN605
CN606
L515 12AR
L508 27uH
TP501
TP504

9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19

DY

CN501 6P WHT :VH
1 H+
2 H+
3 H-
4 H-
5 V-
6 V+

CN508 2P WHT :MINI
1 ΘF-V
2 ΘF-H
TO FOCUS VR

CN502 6P WHT :MINI
TO C BOARD CN702
6 H2
5 H1
4 NC
3 GND
2 180V
1 G2

TO PICTURE TUBE

FV
TO FOCUS VR Θ4E/M4U
TO C BOARD Θ2E/M2U J701 (64)

112.V BLK

CN503 5P WHT :MINI
5V A
-15V
GND
115V
GND
15V
TO G BOARD CN605

CN504 3P YEL :S-MICRO
SDC SW
GND
B1B
TO G BOARD CN606

CN509
LAND
NC
LAND RET

112.LCC

A (3/3)
(H/V OUT
ΘEFLECTION SYSTEM
AUΘIO OUT)

B-SS9536<U/C>-A..P3

·A BOA
39 0.7 V
42 10.0 V
45 3.9 V
48 5.0 V
51 4.2 V
54 11.0 V
57 5.9 V
60 3.8 V
63 170 V
66 2.4 V

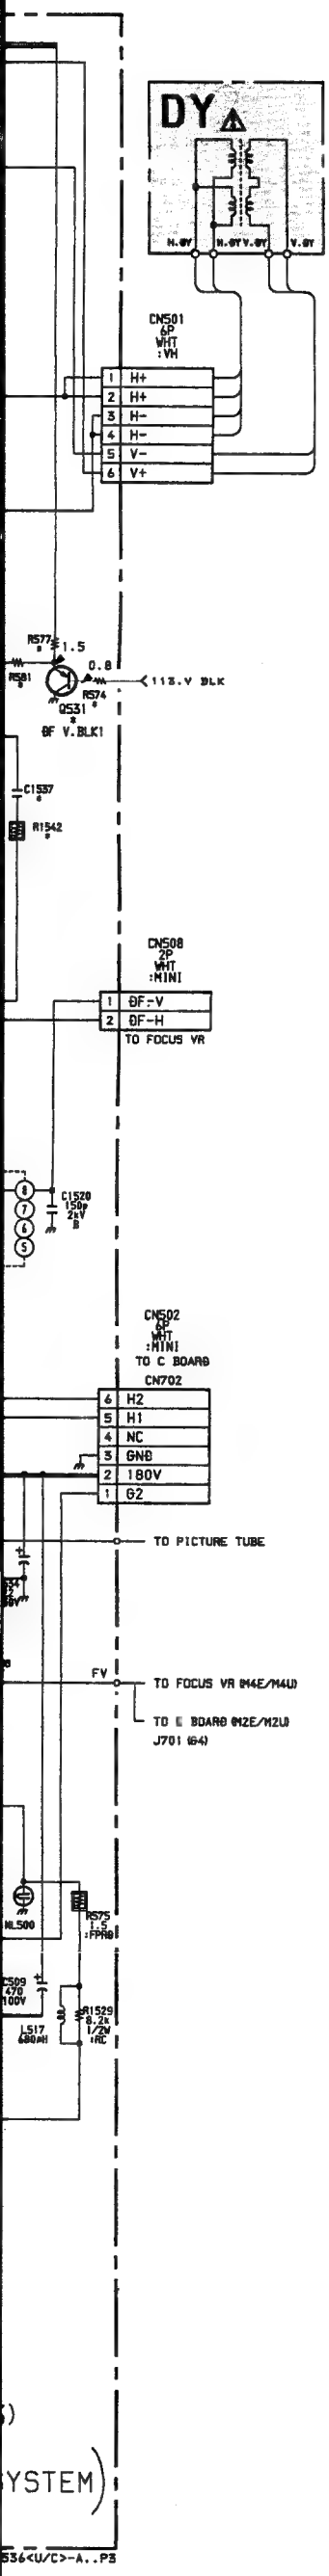

·A BOARD WAVEFORMS

39 0.7 Vp-p (V)	40 11.0 Vp-p (V)	41 12.0 Vp-p (V)
42 10.0 Vp-p (H)	43 12.0 Vp-p (H)	44 4.8 Vp-p (V)
45 3.9 Vp-p (V)	46 5.0 Vp-p (V)	47 4.8 Vp-p (V)
48 5.0 Vp-p (V)	49 4.0 Vp-p (H)	50 4.8 Vp-p (H)
51 4.2 Vp-p (H)	52 4.8 Vp-p (H)	53 120 Vp-p (V)
54 11.0 Vp-p (V)	55 3.4 Vp-p (V)	56 1.5 Vp-p (V)
57 5.9 Vp-p (V)	58 11.2 Vp-p (V)	59 4.5 Vp-p (H)
60 3.8 Vp-p (H)	61 2.6 Vp-p (H)	62 3.8 Vp-p (H)
63 170 Vp-p (H)	64 18.0 Vp-p (H)	65 1000 Vp-p (H)
66 2.4 Vp-p (V)	67 338 Vp-p (H)	

A BOARD IC404 CXA1739S

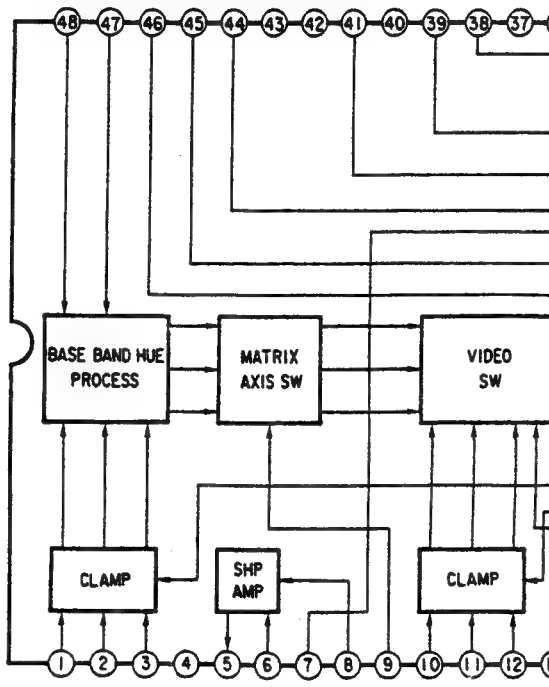

A BOARD IC200 AN5265

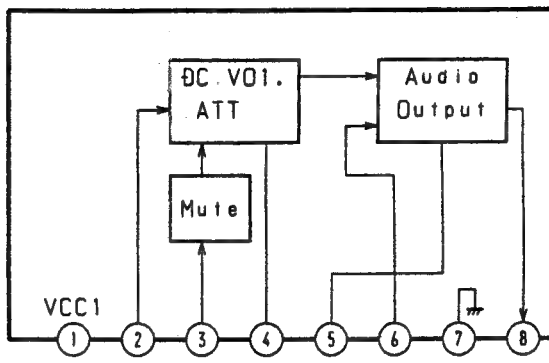

A BOARD IC101 µPD78013YCW

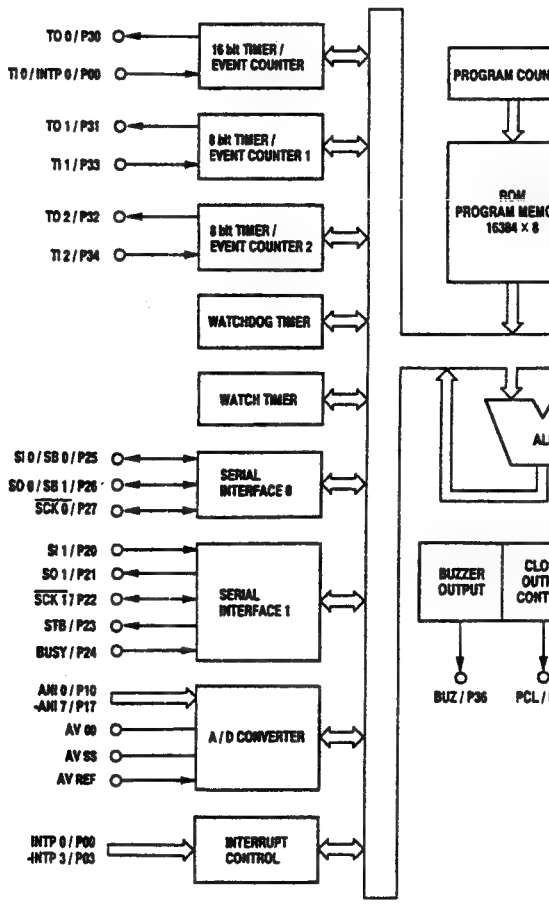

(V)	㊶ 12.0 Vp-p (V)
(H)	㊹ 4.8 Vp-p (V)
(V)	㊼ 4.8 Vp-p (V)
(H)	㊿ 4.8 Vp-p (H)
(H)	53 120 Vp-p (V)
(V)	56 1.5 Vp-p (V)
(V)	59 4.5 Vp-p (H)
(H)	62 3.8 Vp-p (H)
(H)	65 1000 Vp-p (H)
(H)	

A BOARD IC404 CXA1739S

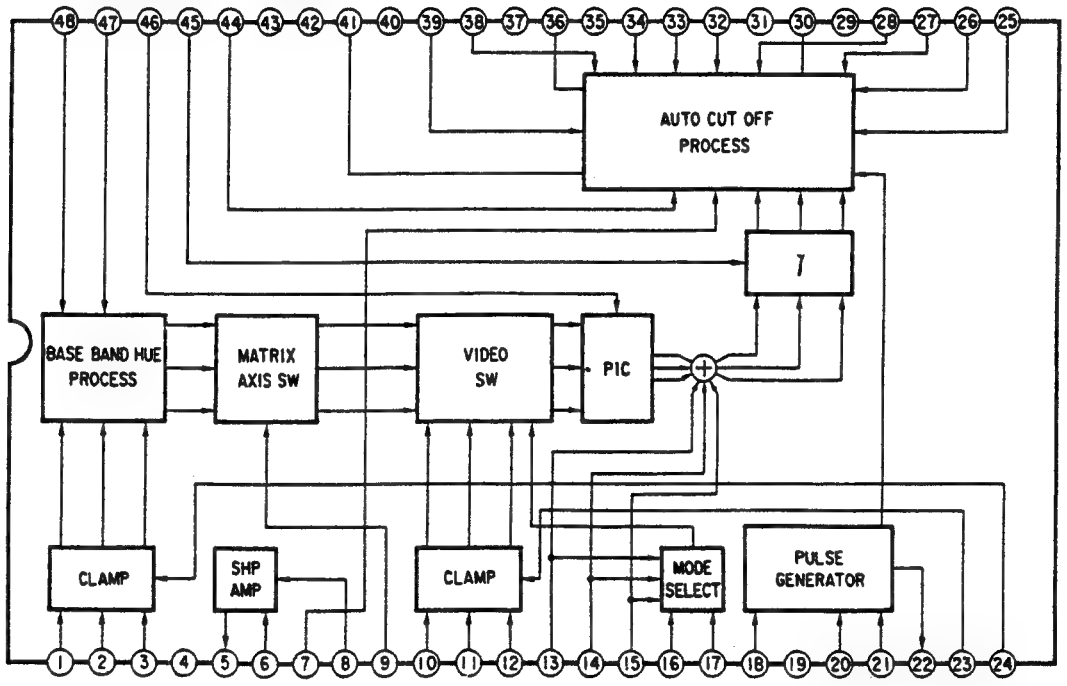

A BOARD IC200 AN5265

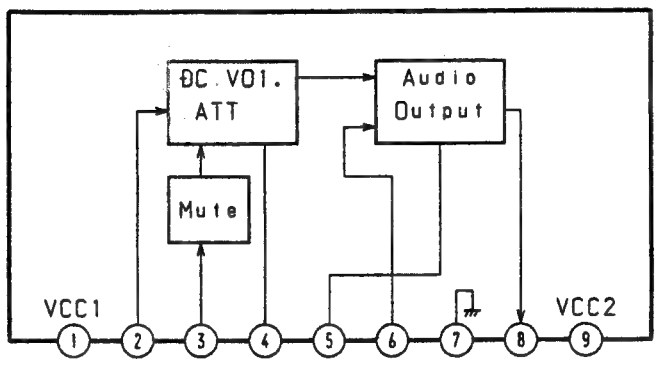

A BOARD IC101 μPD78013YCW

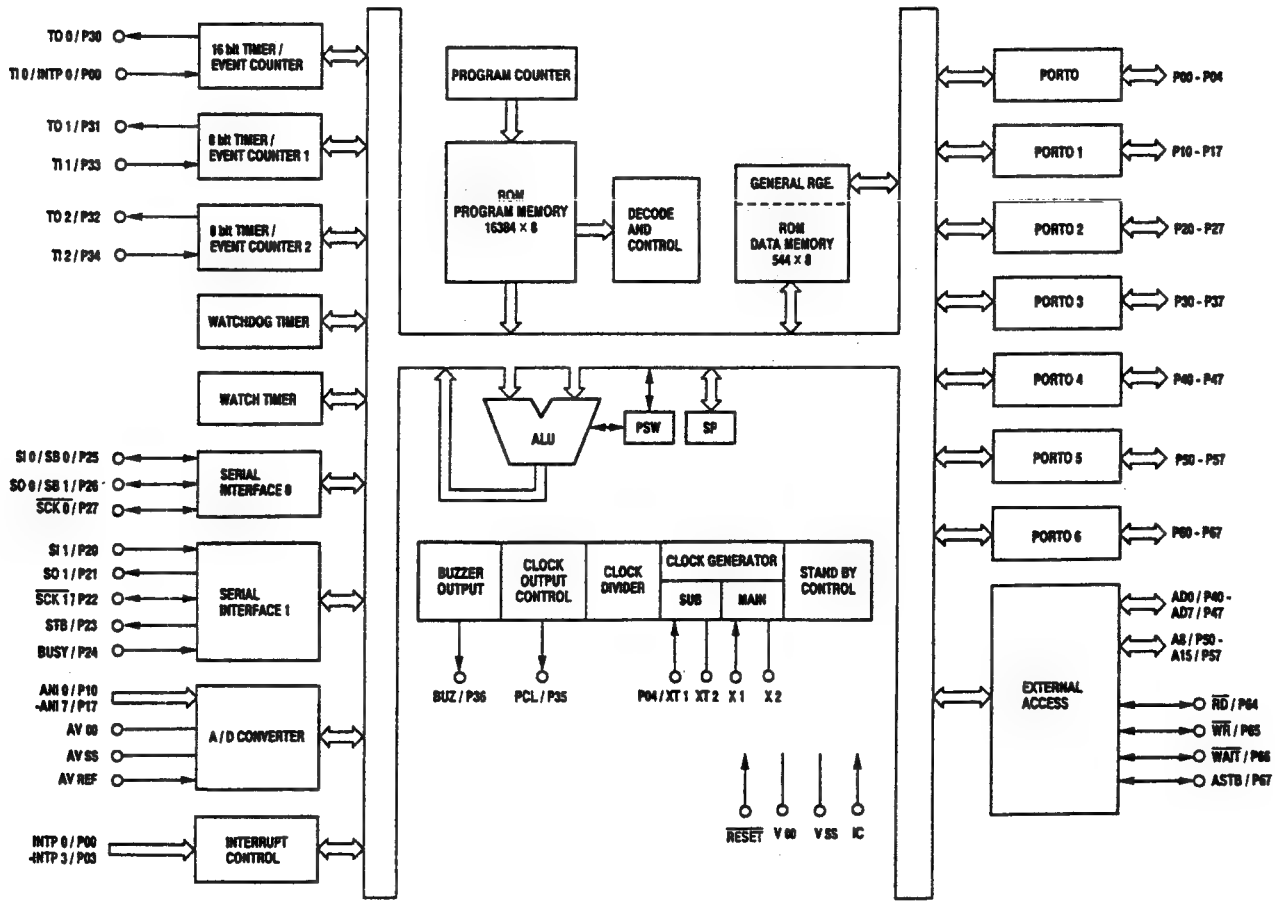

Schematic diagrams
← A(3/3) board

Schematic diagram
G H J
Q X S boards ➡

CAUTION (US MODEL ONLY)

This set is equipped with a polarized ac power cord plug (one blade of the plug is wider than the other). When replacing the ac power cord, be sure to connect it with specified part number as shown in this diagram

·Q BOARD WAVEFORMS

① PAL NTSC3.58 NTSC4.43 1.0 Vp-p (H)	① SECAM 1.0 Vp-p (H)	② S-VIDEO 0.95 Vp-p (H)
③ S-VIDEO 0.65 Vp-p (H)	④ ANALOG RGB 0.7 Vp-p (H)	⑤ ANALOG RGB 0.7 Vp-p (H)
⑥ ANALOG RGB 0.7 Vp-p (H)	⑦ ANALOG RGB 2.0 Vp-p (H)	

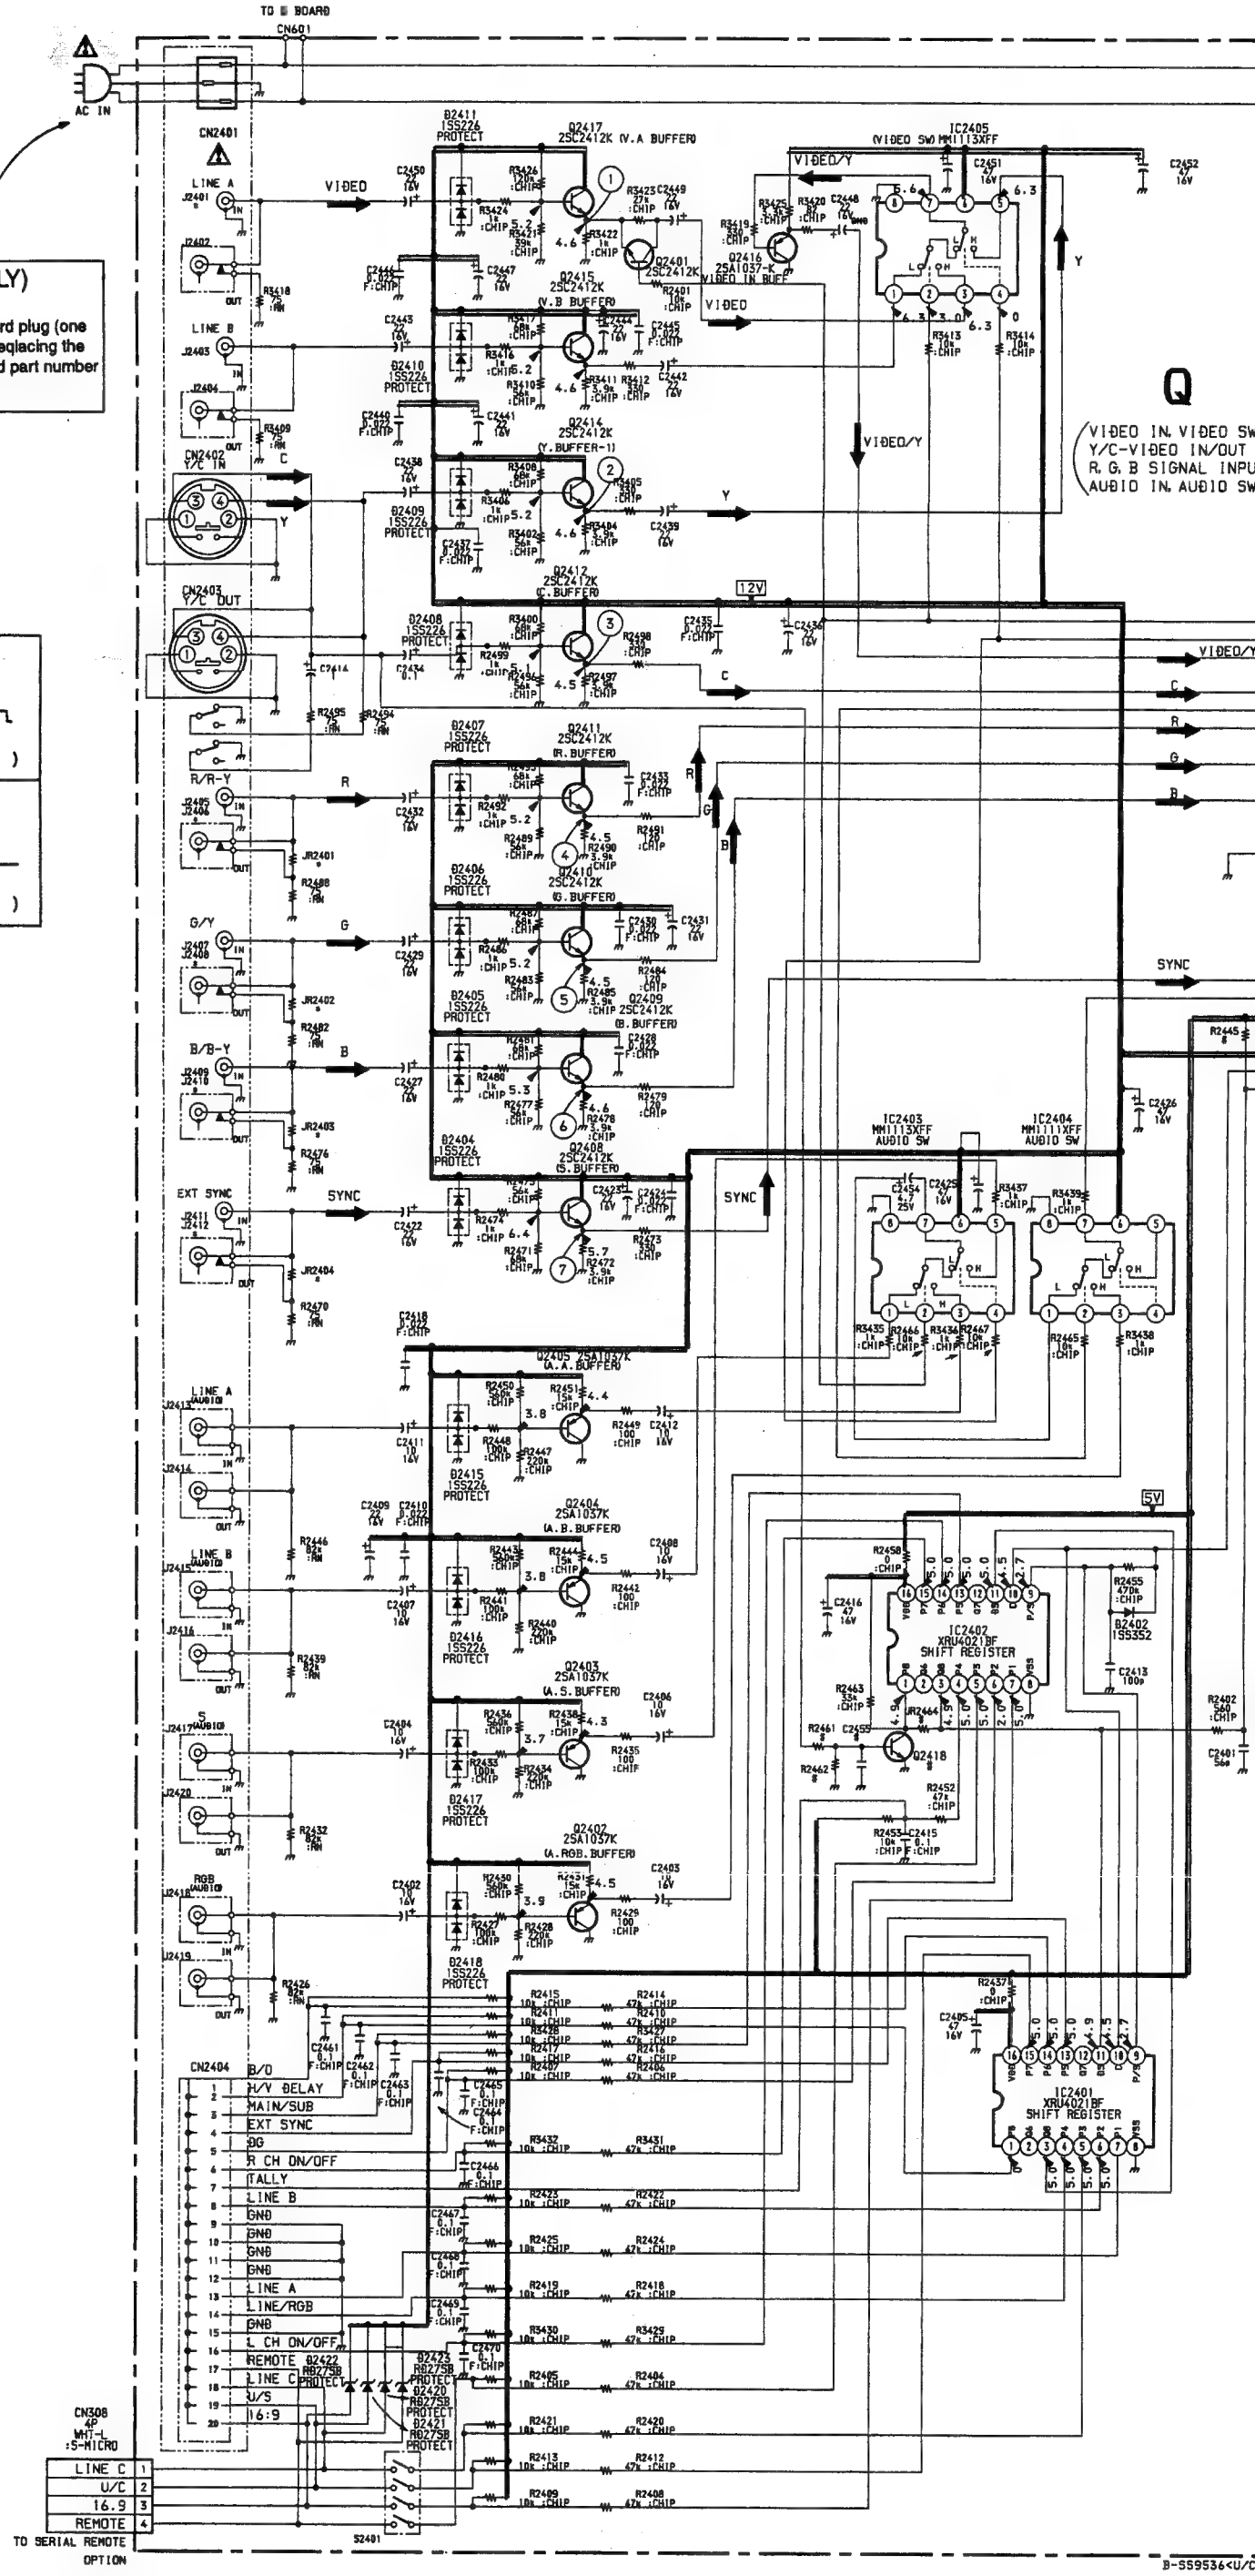

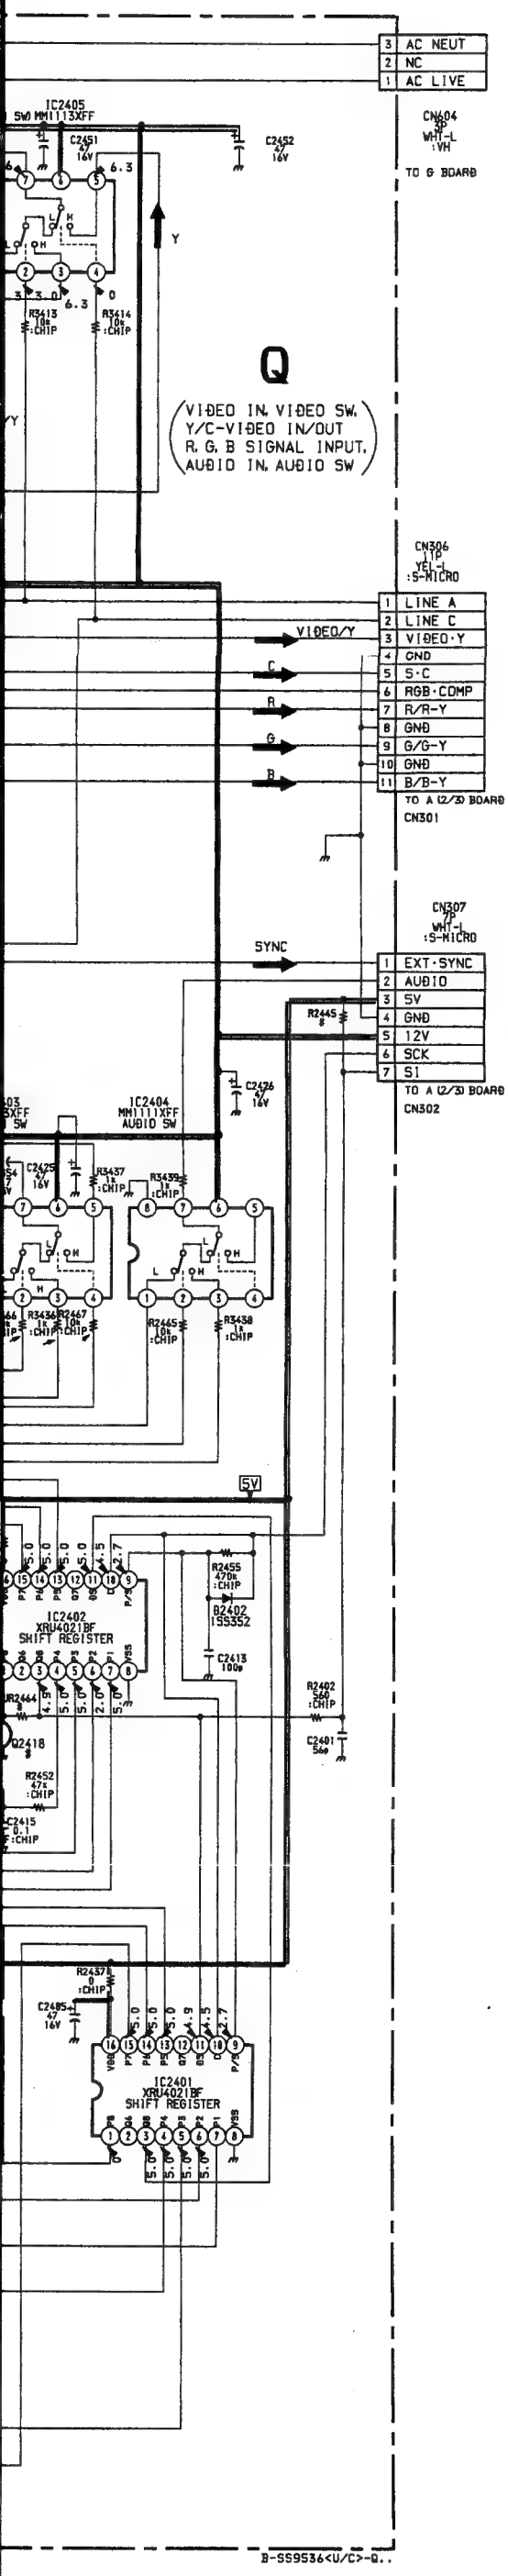

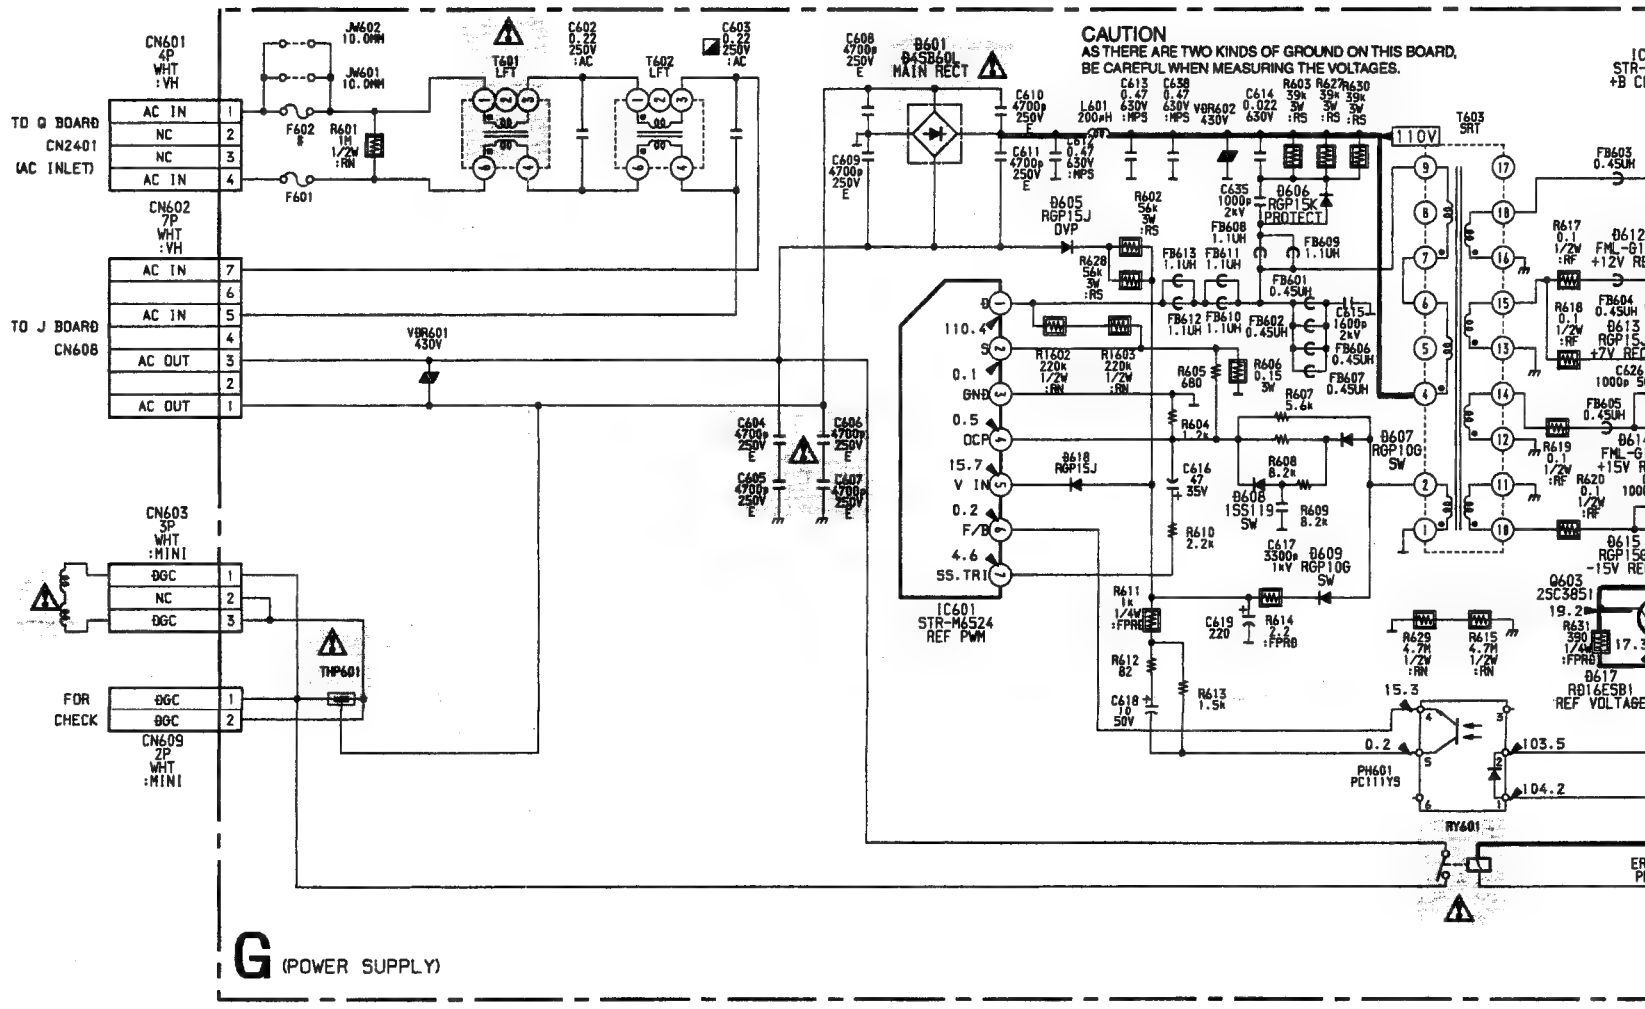

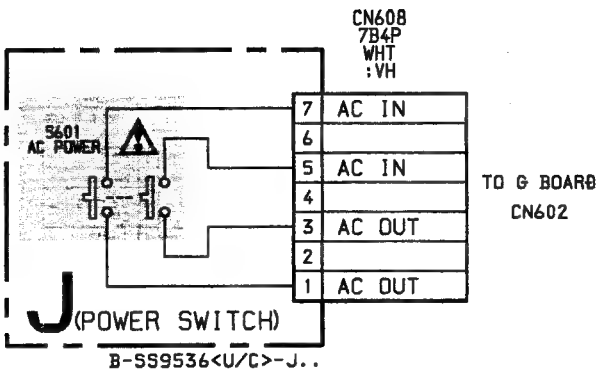

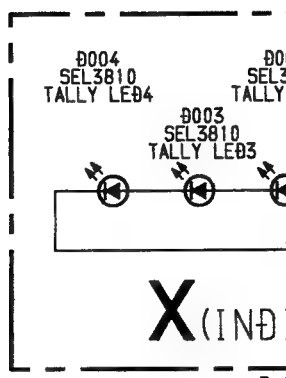

S BOARD IC801 Z8622812PSC

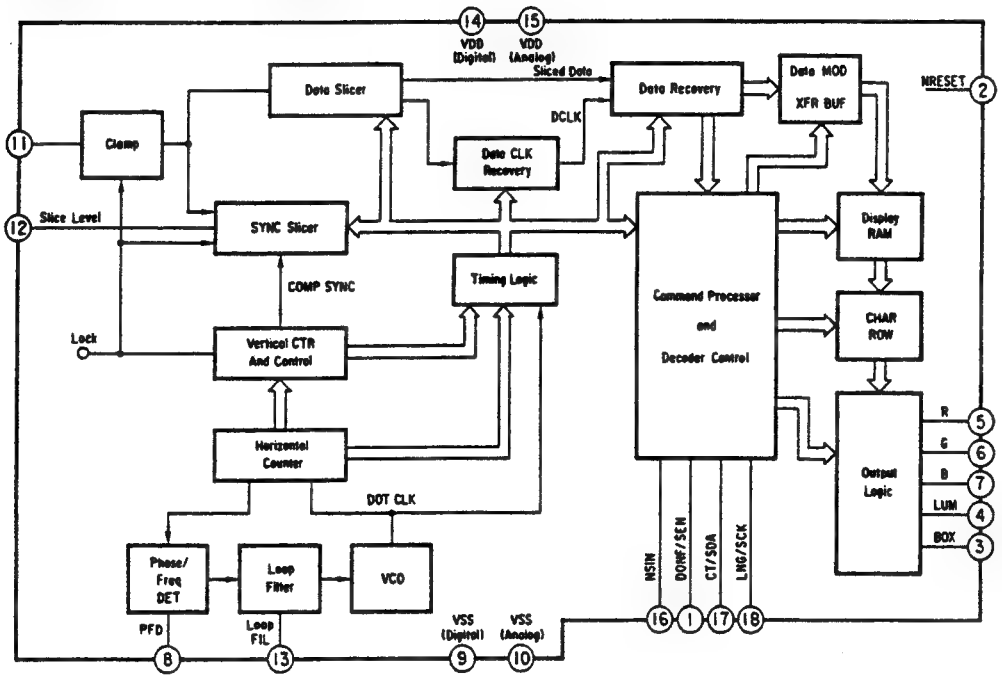

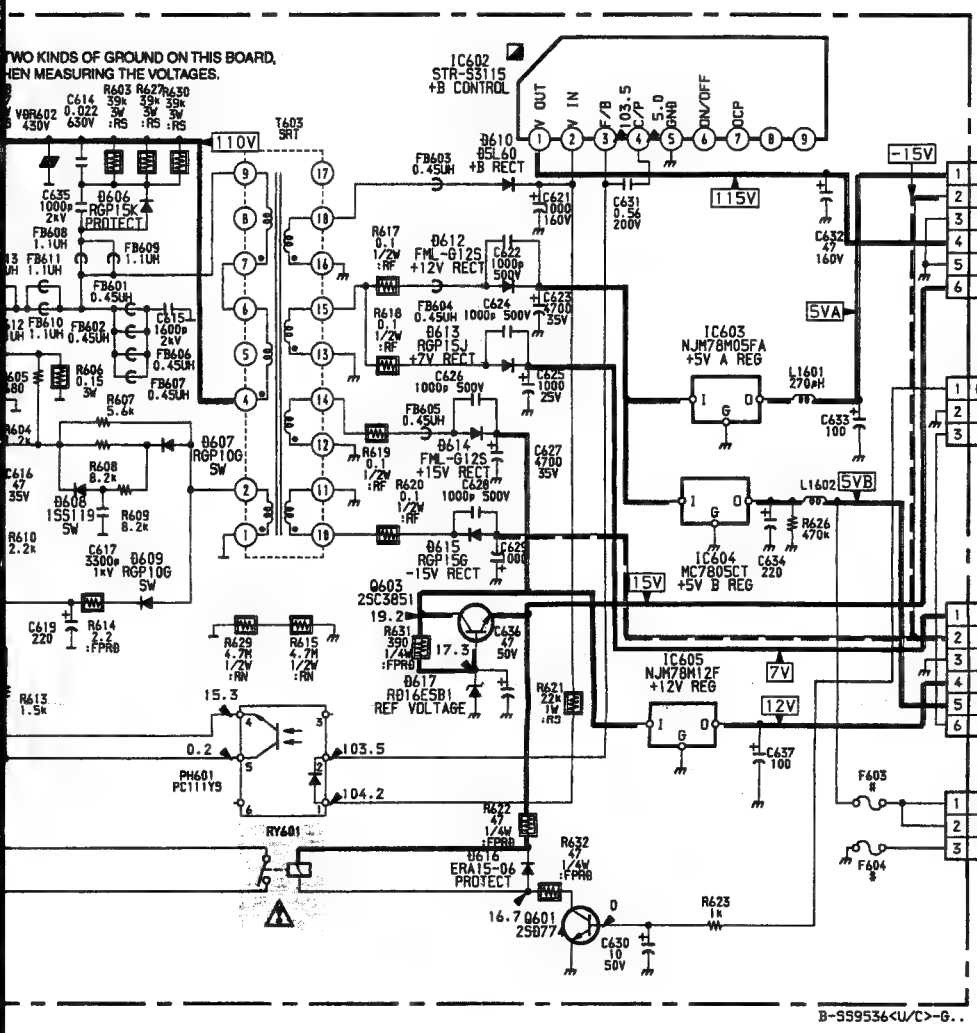

B-S59536<U/C>-G..

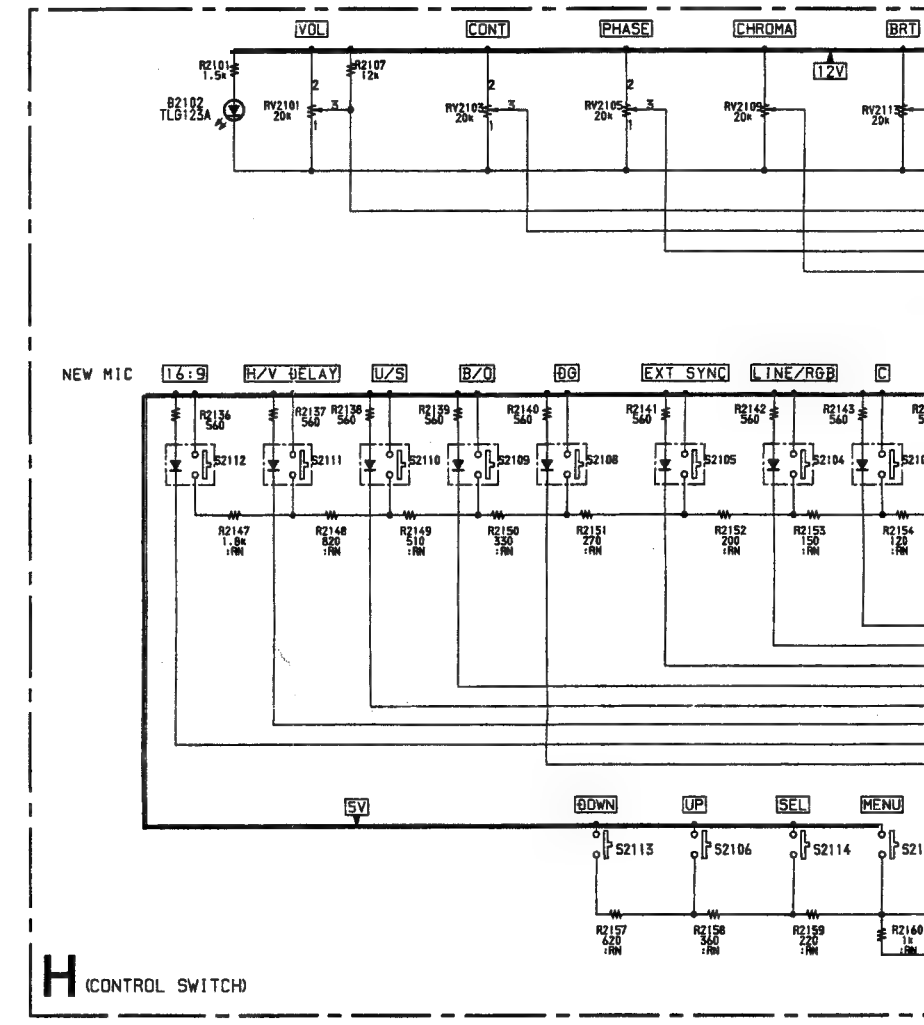

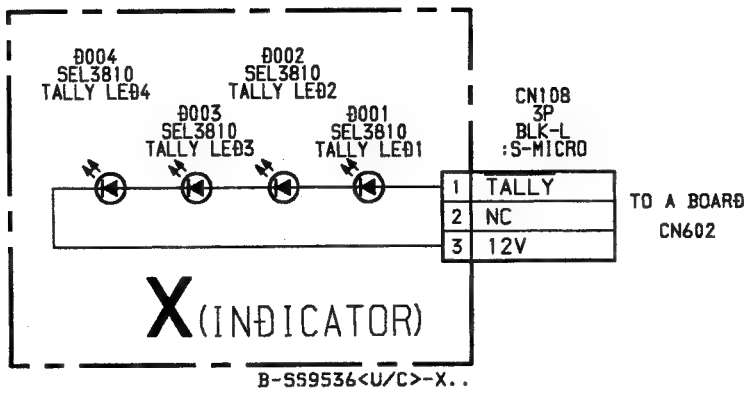

B-S59536<U/C>-X..

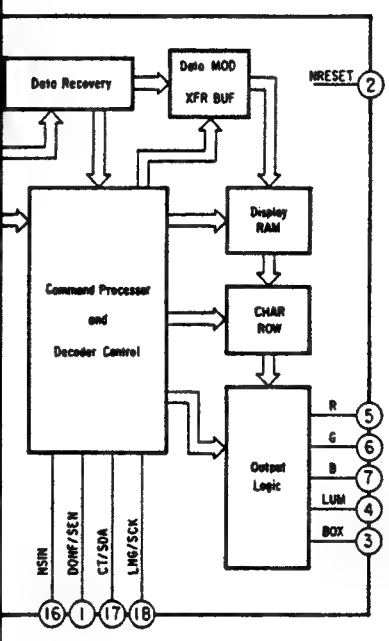

PVM-20M2U/20M4U ONLY

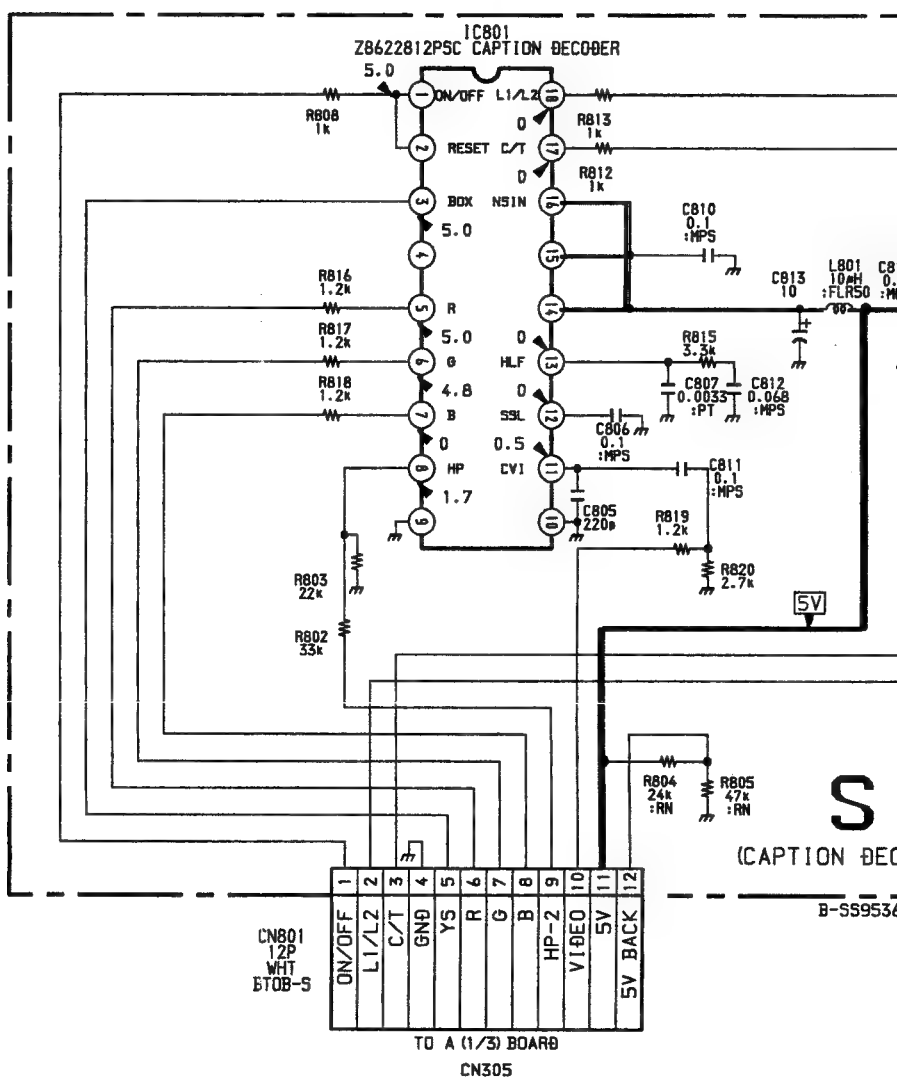

B-S59536

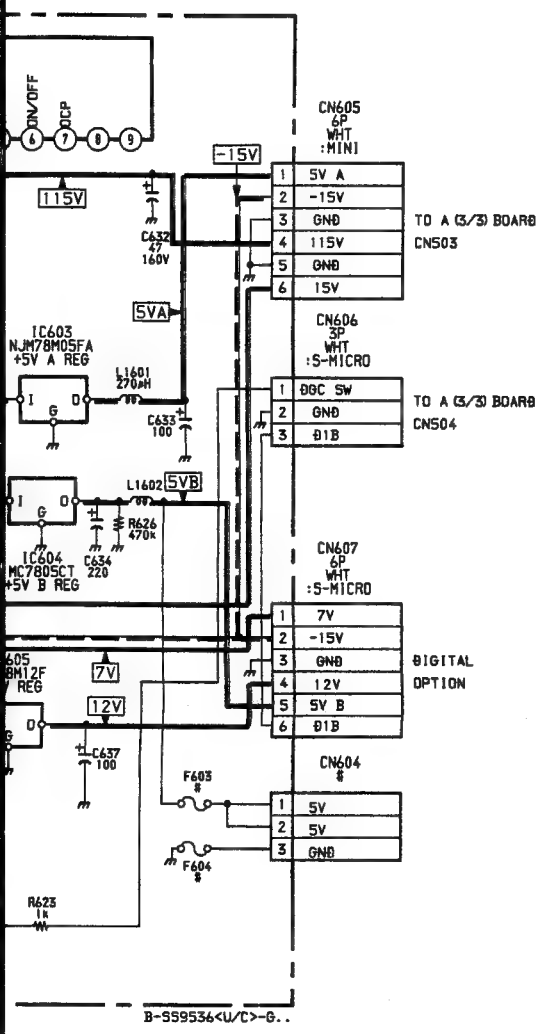

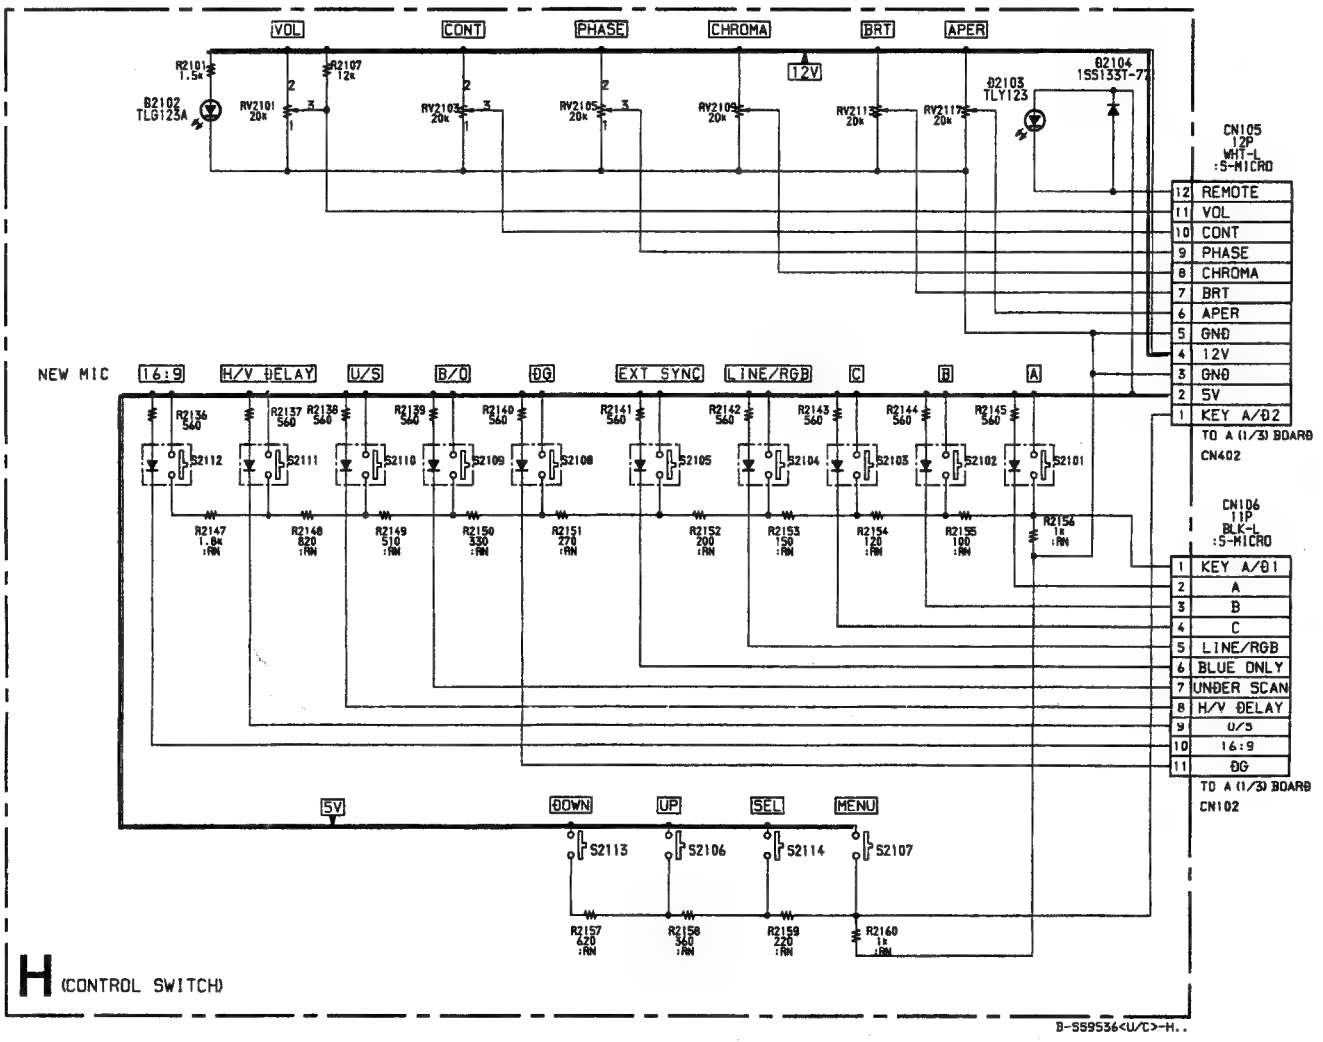



PVM-20M2U/20M4U ONLY

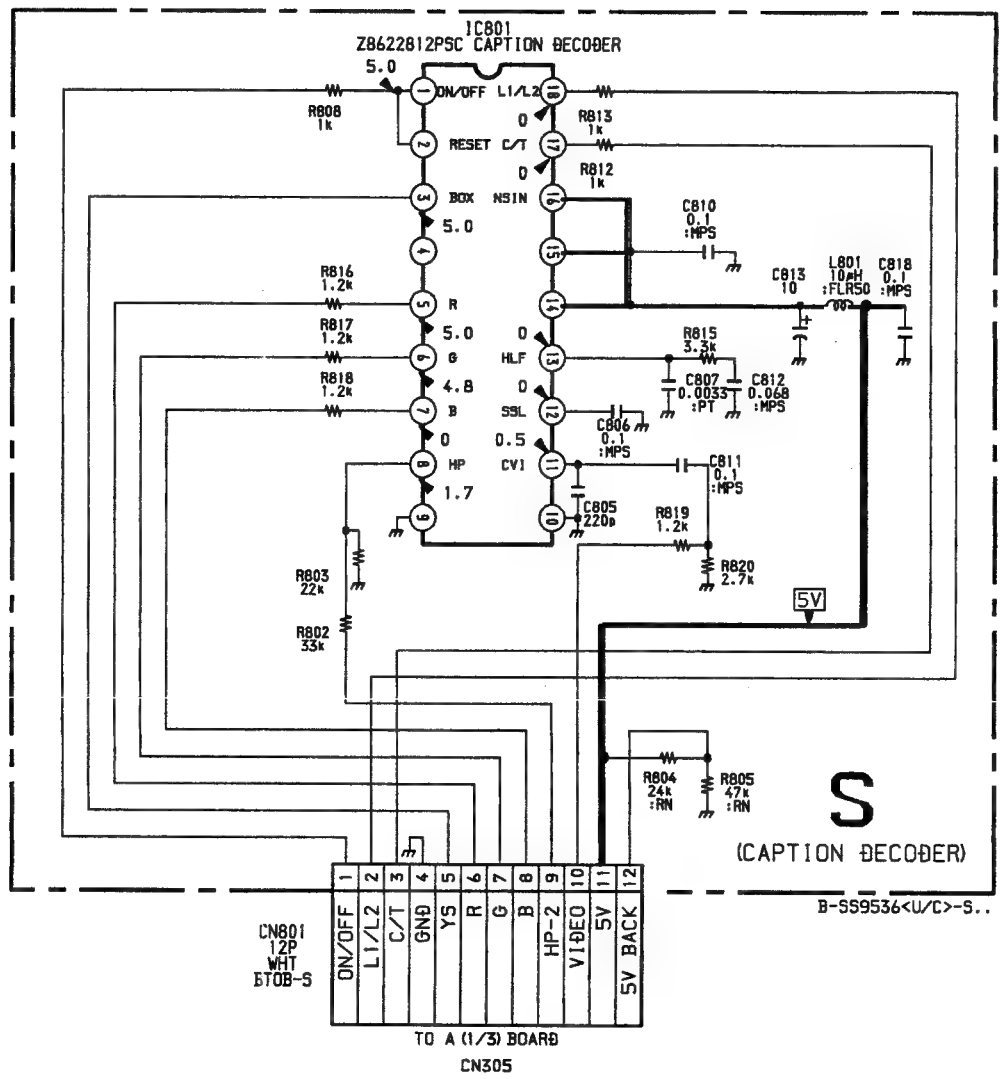

G [POWER SUPPLY]

–G BOARD–

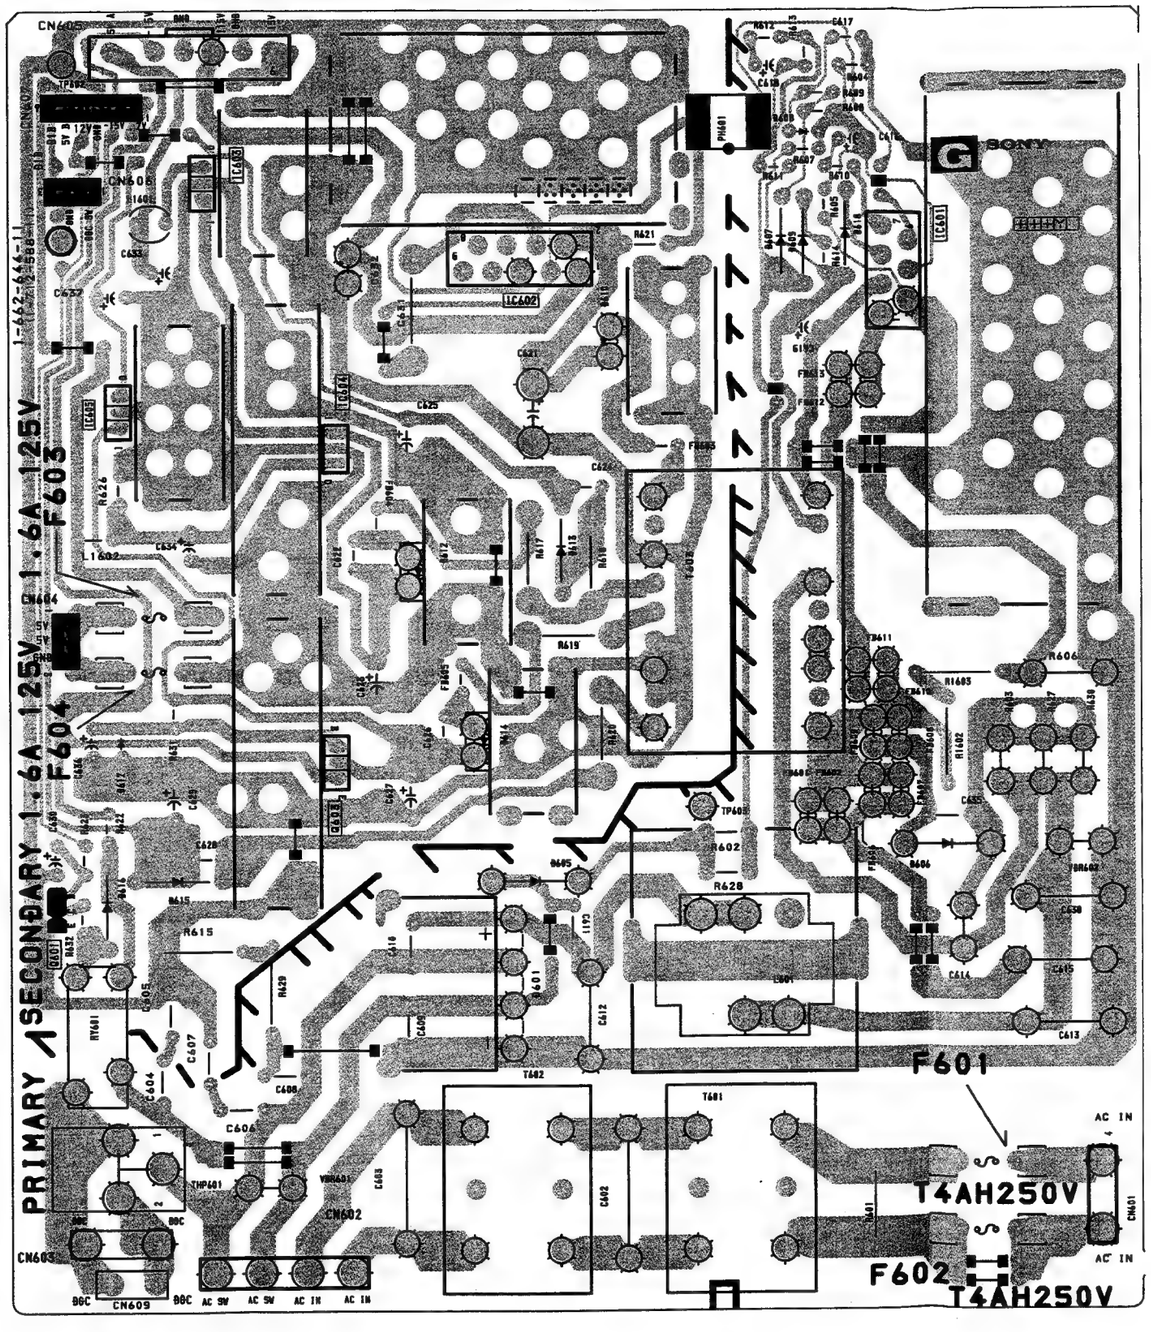

H [CONTROL SWITCH] Q [VIDEO IN, VIDEO SW, Y/C-VIDEO IN/OUT, R.G.B SIGNAL INPUT, AUDIO IN, AUDIO SW] J [POWER SWITCH] S [CAPTION DECODER] X [INDICATOR]

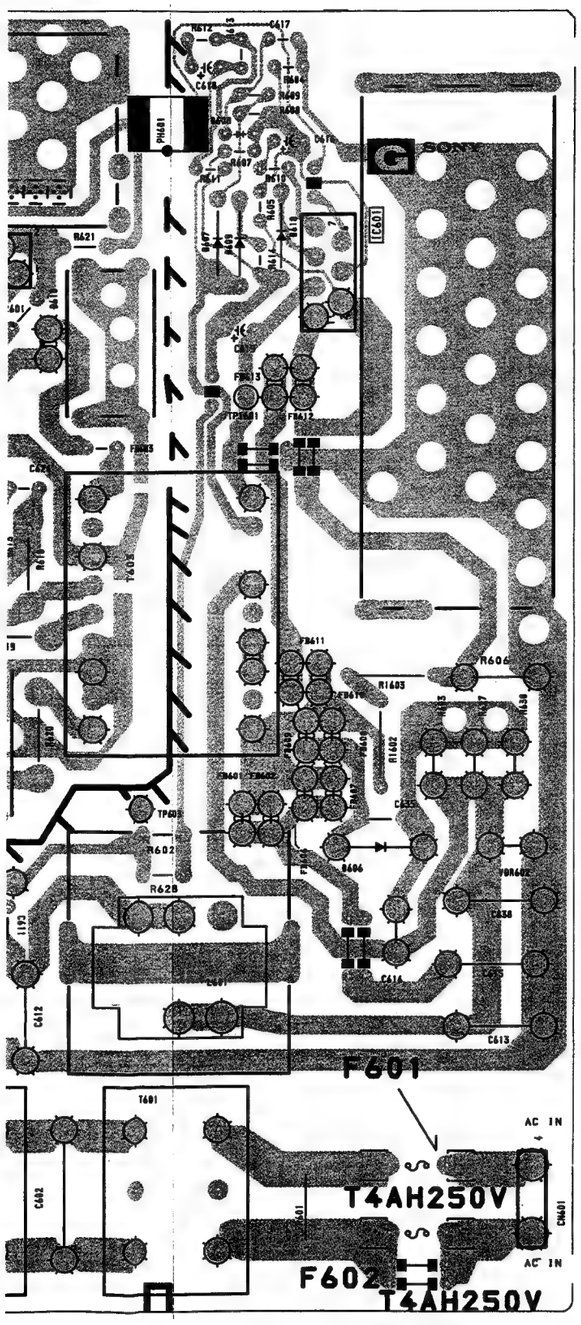

–H BOARD–

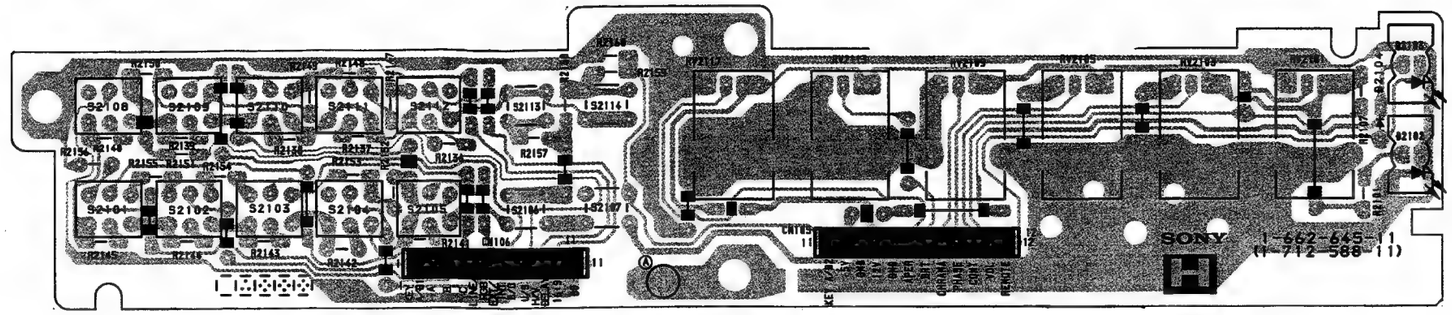

–Q BOARD–

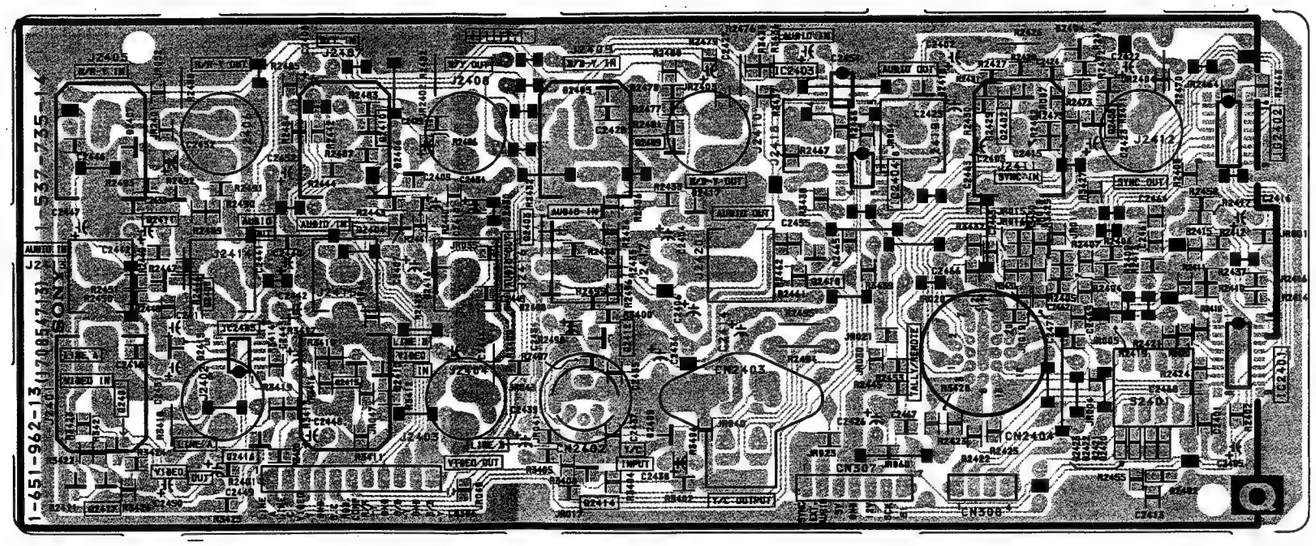

–J BOARD–

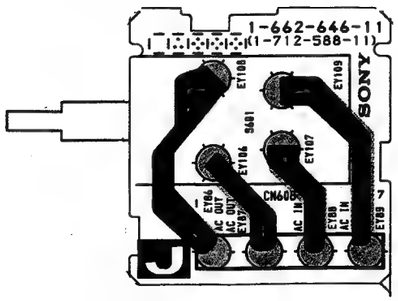

–S BOARD–
PVM-20M2U/20M4U ONLY



–X BOARD–



PVM-20M2U/20M2E ONLY

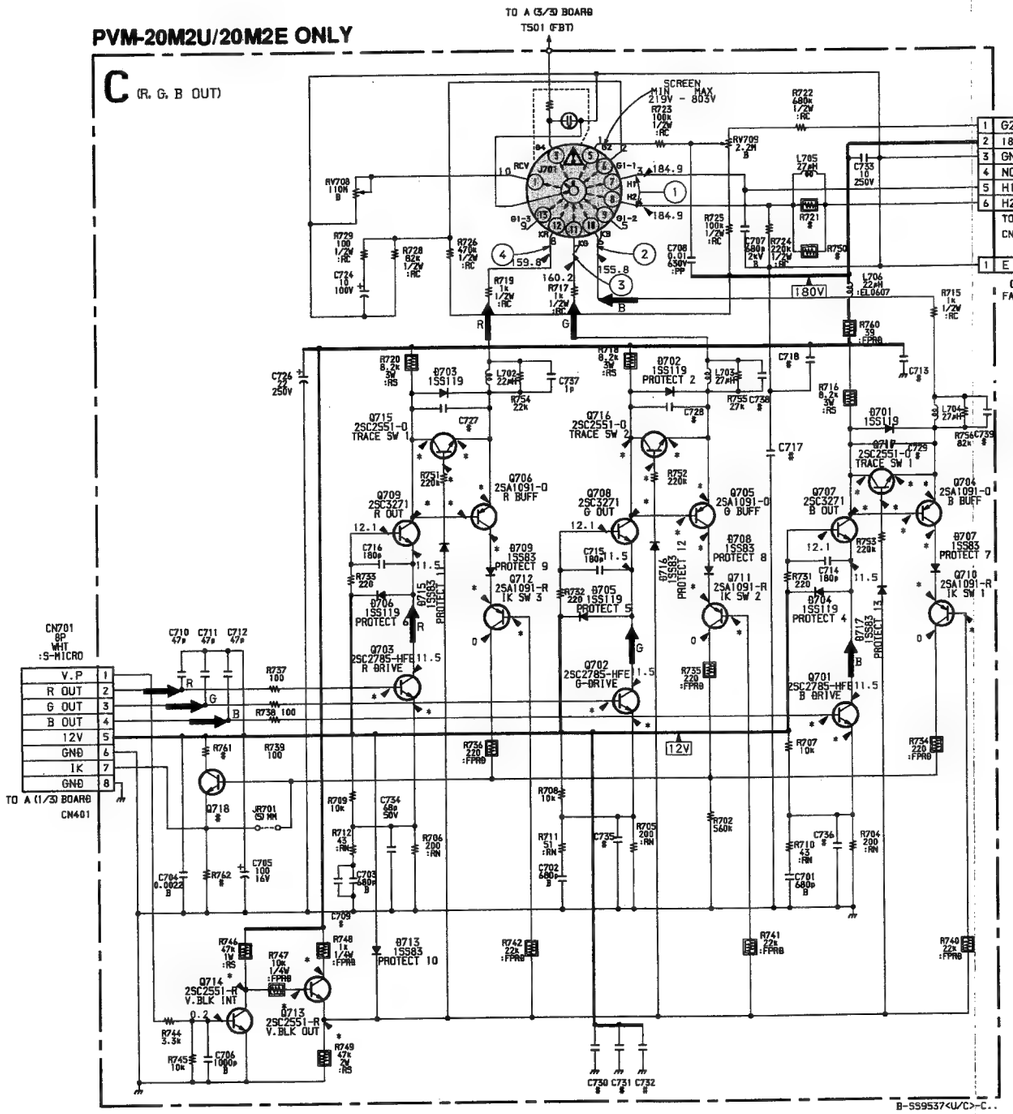

·C BOARD WAVEFORMS

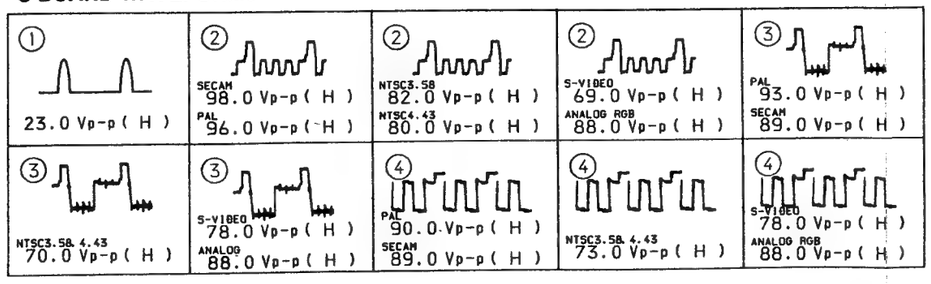

C BOARD * MARK LIST

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
Q701 B	2.0	1.9	1.73	1.8	1.8	2.0
E	1.4	1.3	1.1	1.1	1.2	1.4
Q702 B	2.0	1.9	1.7	1.7	1.8	2.0
E	1.5	1.3	1.1	1.1	1.2	1.4
Q703 B	1.9	1.8	1.6	1.6	1.8	1.9
E	1.3	1.2	1.0	1.0	1.2	1.3
Q704 B	143.6	148.0	153.9	153.4	144.9	143.8
C	129.0	134.3	135.4	134.5	31.2	111.5
E	139.7	144.4	150.3	149.6	140.4	140.1
Q705 B	141.7	145.8	154.9	154.2	145.0	141.8
C	124.9	130.2	132.3	130.4	60.4	106.6
E	138.3	142.3	151.3	150.6	140.7	138.5
Q706 B	149.7	151.5	160.4	159.8	144.9	148.6
C	134.5	138.3	141.2	141.1	103.2	114.7
E	146.2	148.0	157.1	156.4	140.8	145.0
Q707 C	143.8	148.0	154.0	153.4	144.9	143.7
Q708 C	141.9	145.9	155.2	154.3	145.0	141.8
Q709 C	149.8	151.5	160.6	159.9	144.9	148.5
Q710 B	172.8	173.1	174.3	173.9	167.0	173.5
E	160.9	164.0	162.9	162.2	154.0	161.2
Q711 B	172.8	173.2	174.3	173.9	167.0	173.5
C	160.6	161.0	162.3	161.8	154.1	161.3
Q712 B	172.9	173.2	174.0	174.2	167.0	173.5
E	161.6	163.6	164.1	164.8	154.5	161.4
Q713 B	172.8	173.2	173.9	173.9	166.8	173.5
C	184.2	184.5	184.7	184.6	176.6	183.8
E	173.3	173.6	174.3	174.3	167.2	173.9
Q714 C	173.6	173.7	174.5	174.4	167.4	174.1
Q715 B	146.7	148.6	157.6	157.0	140.3	145.7
C	149.5	151.5	160.6	159.9	144.9	148.5
E	146.1	148.0	157.2	156.5	140.7	145.0
Q716 B	139.2	143.3	152.5	151.5	140.7	139.4
C	141.7	145.8	155.2	154.2	145.1	141.8
E	138.2	142.3	151.4	150.5	140.6	138.4
Q717 B	140.9	145.4	151.7	150.8	140.6	141.2
C	143.6	148.0	154.1	153.4	144.9	143.8
E	139.8	144.4	150.5	149.6	140.4	140.0

D701	PROTECT 1
D702	PROTECT 2
D703	PROTECT 3
D704	PROTECT 4
D705	PROTECT 5
D706	PROTECT 6
D707	PROTECT 7
D708	PROTECT 8
D709	PROTECT 9
D713	PROTECT 10
D715	PROTECT 11
D716	PROTECT 12
D717	PROTECT 13
Q701	B DRIVE
Q702	G DRIVE
Q703	R DRIVE
Q704	B BUFF
Q705	G BUFF
Q706	R BUFF
Q707	B OUT
Q708	G OUT
Q709	R OUT
Q710	IK SW 1
Q711	IK SW 2
Q712	IK SW 3
Q713	V. BLK OUT
Q714	V. BLK INT
Q715	TRACE SW 1
Q716	TRACE SW 2
Q717	TRACE SW 3

PVM-20M4U/20M4E/20M4A ONLY

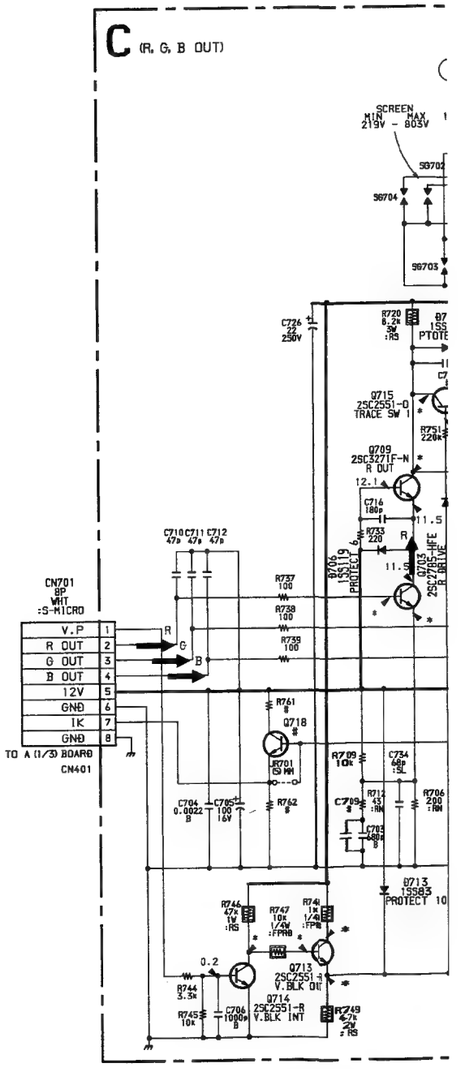

·C BOARD WAVEFORMS

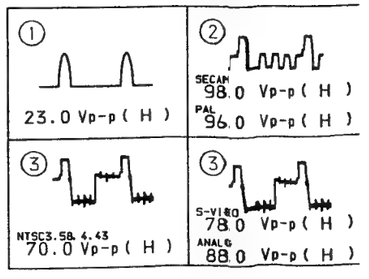

Schematic diagram
C board ➡

J/20M4E/20M4A ONLY

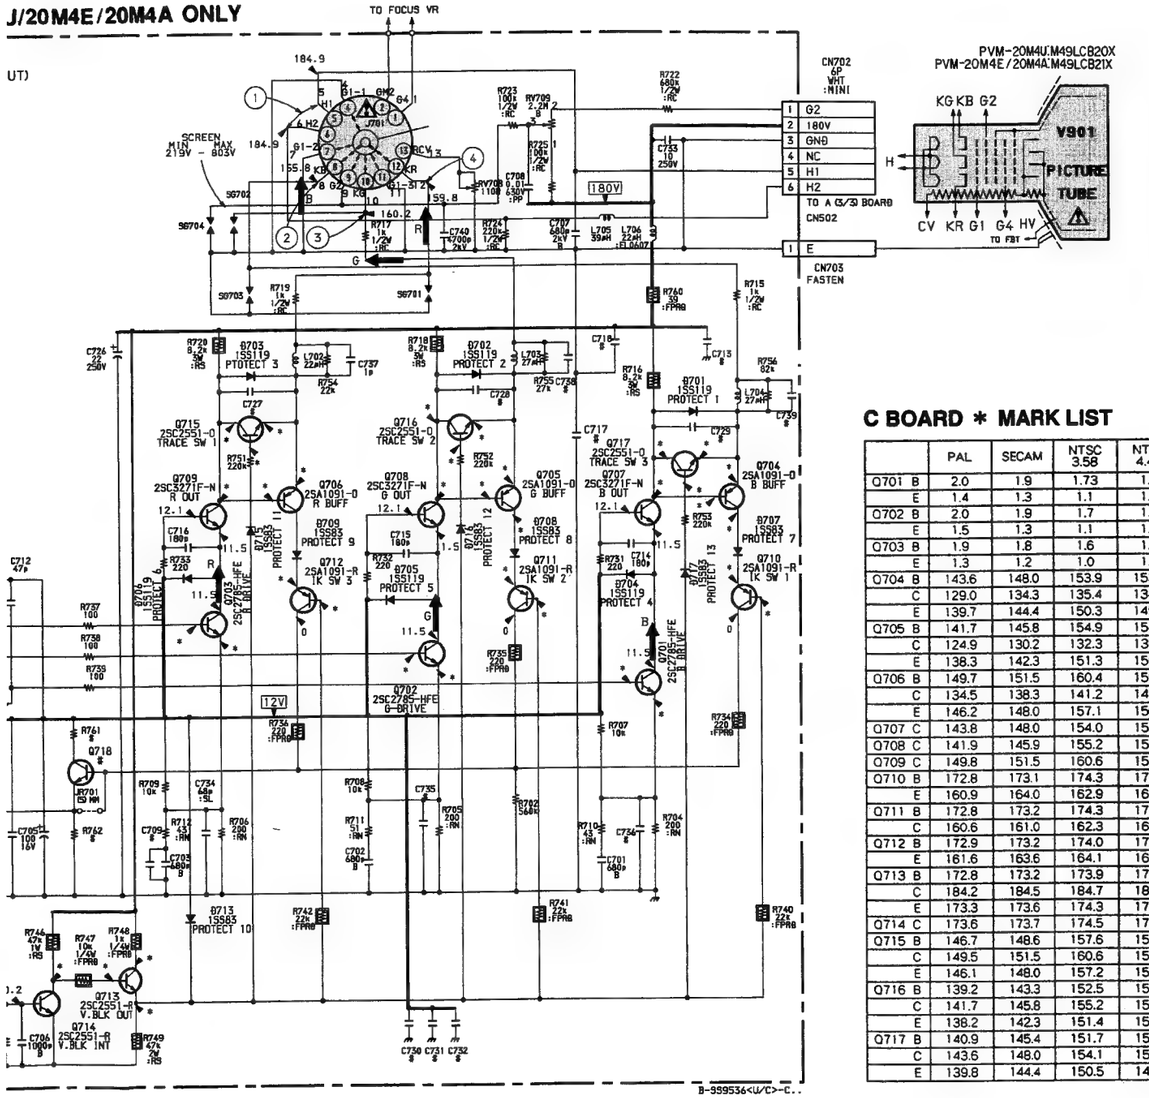

C BOARD * MARK LIST

	PAL	SECAM	NTSC 3.58	NTSC 4.43	S-VIDEO	ANALOG RGB
Q701 B	2.0	1.9	1.73	1.8	1.8	2.0
E	1.4	1.3	1.1	1.1	1.2	1.4
Q702 B	2.0	1.9	1.7	1.7	1.8	2.0
E	1.5	1.3	1.1	1.1	1.2	1.4
Q703 B	1.9	1.8	1.6	1.6	1.8	1.9
E	1.3	1.2	1.0	1.0	1.2	1.3
Q704 B	143.6	148.0	153.9	153.4	144.9	143.8
C	129.0	134.3	135.4	134.5	31.2	111.5
E	139.7	144.4	150.3	149.6	140.4	140.1
Q705 B	141.7	145.8	154.9	154.2	145.0	141.8
C	124.9	130.2	132.3	130.4	60.4	106.6
E	138.3	142.3	151.3	150.6	140.7	138.5
Q706 B	149.7	151.5	160.4	159.8	144.9	148.6
C	134.5	138.3	141.2	141.1	103.2	114.7
E	146.2	148.0	157.1	156.4	140.8	145.0
Q707 C	143.8	148.0	154.0	153.4	144.9	143.7
Q708 C	141.9	145.9	155.2	154.3	145.0	141.8
Q709 C	149.8	151.5	160.6	159.9	144.9	148.5
Q710 B	172.8	173.1	174.3	173.9	167.0	173.5
E	160.9	164.0	162.9	162.2	154.0	161.2
Q711 B	172.8	173.2	174.3	173.9	167.0	173.5
C	160.6	161.0	162.3	161.8	154.1	161.3
Q712 B	172.9	173.2	174.0	174.2	167.0	173.5
E	161.6	163.6	164.1	164.8	154.5	161.4
Q713 B	172.8	173.2	173.9	173.9	166.8	173.5
C	184.2	184.5	184.7	184.6	176.6	183.8
E	173.3	173.6	174.3	174.3	167.2	173.9
Q714 C	173.6	173.7	174.5	174.4	167.4	174.1
Q715 B	146.7	148.6	157.6	157.0	140.3	145.7
C	149.5	151.5	160.6	159.9	144.9	148.5
E	146.1	148.0	157.2	156.5	140.7	145.0
Q716 B	139.2	143.3	152.5	151.5	140.7	139.4
C	141.7	145.8	155.2	154.2	145.1	141.8
E	138.2	142.3	151.4	150.5	140.6	138.4
Q717 B	140.9	145.4	151.7	150.8	140.6	141.2
C	143.6	148.0	154.1	153.4	144.9	143.8
E	139.8	144.4	150.5	149.6	140.4	140.0

D701	PROTECT 1
D702	PROTECT 2
D703	PROTECT 3
D704	PROTECT 4
D705	PROTECT 5
D706	PROTECT 6
D707	PROTECT 7
D708	PROTECT 8
D709	PROTECT 9
D713	PROTECT 10
D715	PROTECT 11
D716	PROTECT 12
D717	PROTECT 13
Q701	B DRIVE
Q702	G DRIVE
Q703	R DRIVE
Q704	B BUFF
Q705	G BUFF
Q706	R BUFF
Q707	B OUT
Q708	G OUT
Q709	R OUT
Q710	IK SW 1
Q711	IK SW 2
Q712	IK SW 3
Q713	V. BLK OUT
Q714	V. BLK INT
Q715	TRACE SW 1
Q716	TRACE SW 2
Q717	TRACE SW 3

WAVEFORMS

) (H)	② SECAM 98.0 Vp-p (H) PAL 96.0 Vp-p (H)	② NTSC3.58 82.0 Vp-p (H) NTSC4.43 80.0 Vp-p (H)	② S-VIDEO 69.0 Vp-p (H) ANALOG RGB 88.0 Vp-p (H)	③ PAL 93.0 Vp-p (H) SECAM 89.0 Vp-p (H)
p (H)	③ S-VIDEO 78.0 Vp-p (H) ANALOG 88.0 Vp-p (H)	④ PAL 90.0 Vp-p (H) SECAM 89.0 Vp-p (H)	④ NTSC3.58 4.43 73.0 Vp-p (H)	④ S-VIDEO 78.0 Vp-p (H) ANALOG RGB 88.0 Vp-p (H)

C [R.G.B OUT]

–C BOARD– PVM-20M2U/20M2E ONLY

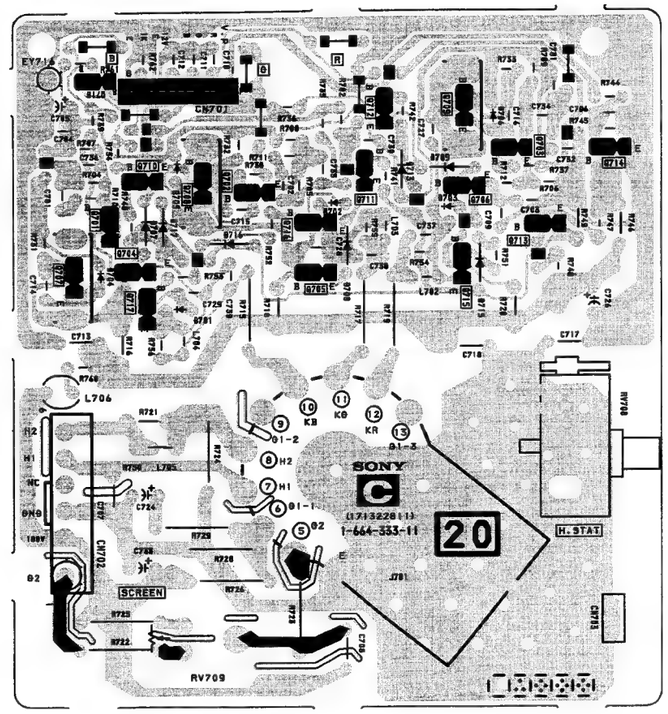

–C BOARD– PVM-20M4U/20M4E/20M4A ONLY

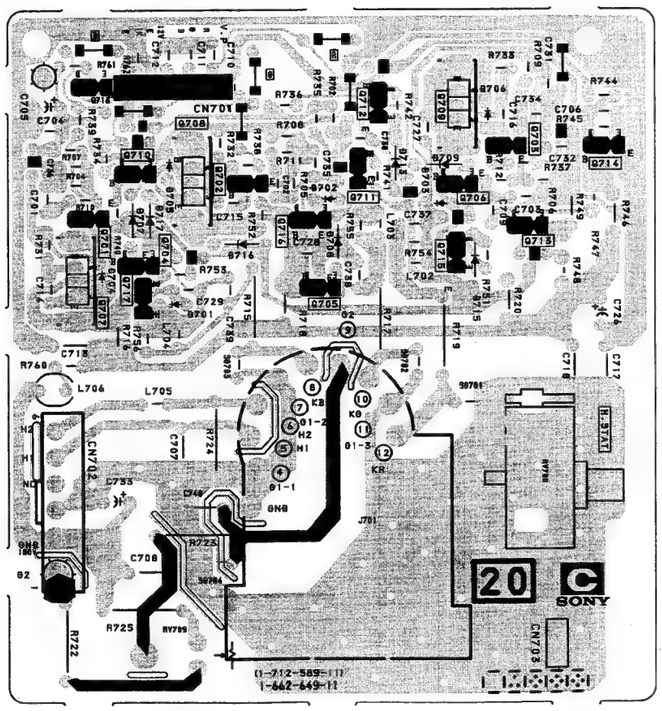

6-5. SEMICONDUCTORS

AN5265



BA10324AF
MC1402BF
MC14066BF
MC14584BF
MC74HC86F



14pin SOP

BA7655AF-E2
CXA1211M
LM358D
MM1111XF
MM1113XFF
NJM2245M
ST24C02FM6TR
XRA10393F
XRA4558F-E2



8pin SOP

BU4053BCF



16pin SOP

CXA1214P



24pin DIP

CXA1739S



48pin DIP

H8D7249



11pin SIP

LA6500-FA
MC14052BF
MC14538BF



LM7912CT



MC14094BF



M51279FP

32pin DIP

M62358FP-E1



24pin SOP

NJM78M05FA
TA7805S
TA7812S



S-80743AL-A7-S



STR-M6524



STR-S3115

9pin ZIP

ST24C01FM6TR

8pin DIP

UPC1377C



22pin DIP

UPD6451AGT-632-E2



20pin SOP

UPD78P018FYCW-M01



64pin DIP

XRA17812T

Z8622812PSC



18pin DIP

DTA144EKA-T146
DTC124EKA-T146
DTC144EKA-T146
2SA1162-G
2SB709A-R
2SC1623-L5L6
2SD601A-S

IMT1US



IMX1

IRF520



2SA1091-O
2SC2551-O



2SA1220A-P
2SA1407-D
2SC2611
2SC2688-LK
2SC2690A-Q



2SC2785-HFE



2SC2958
2SD774-34

2SC3851-G
2SC4686A(LBSONY)
2SD1133
2SD1134
2SD2396K



2SD1878-CA



2SK94
2SK94-X2X3X4

DTZ11B
DTZ13C
DTZ5.6B
DTZ6.2
MA111



D4SB60L



D5L60
FML-G12S

EGP20G
EL1Z
ERD07-15
RGP02-17EL-6433
RGP15K-6179
UF5406
10E2
1S2076
1SS83



ERA15-06
RD16ES-B1
RD16ES-B3
1SS119-25
1SS133T-77



ERC38-06
V11N



PC111YS

RD10SB1

RH-1A



RU-3AM



SEL3810DLC05



SLP281C-50
TLY123



1SS184

1SS226

1SV230TPH3
1SV232-TPH3



1S2836

SECTION 7
EXPLODED VIEWS

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The componants identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

7-1. CHASSIS

● : 7-685-648-79 +BVTP 3X12
■ : 7-682-661-01 +PS 4X8
▲ : 7-685-646-79 +BVTP 3X8
◆ : 7-685-663-79 +BVTP 4X16
○ : 7-685-881-09 +BVTP 4X8

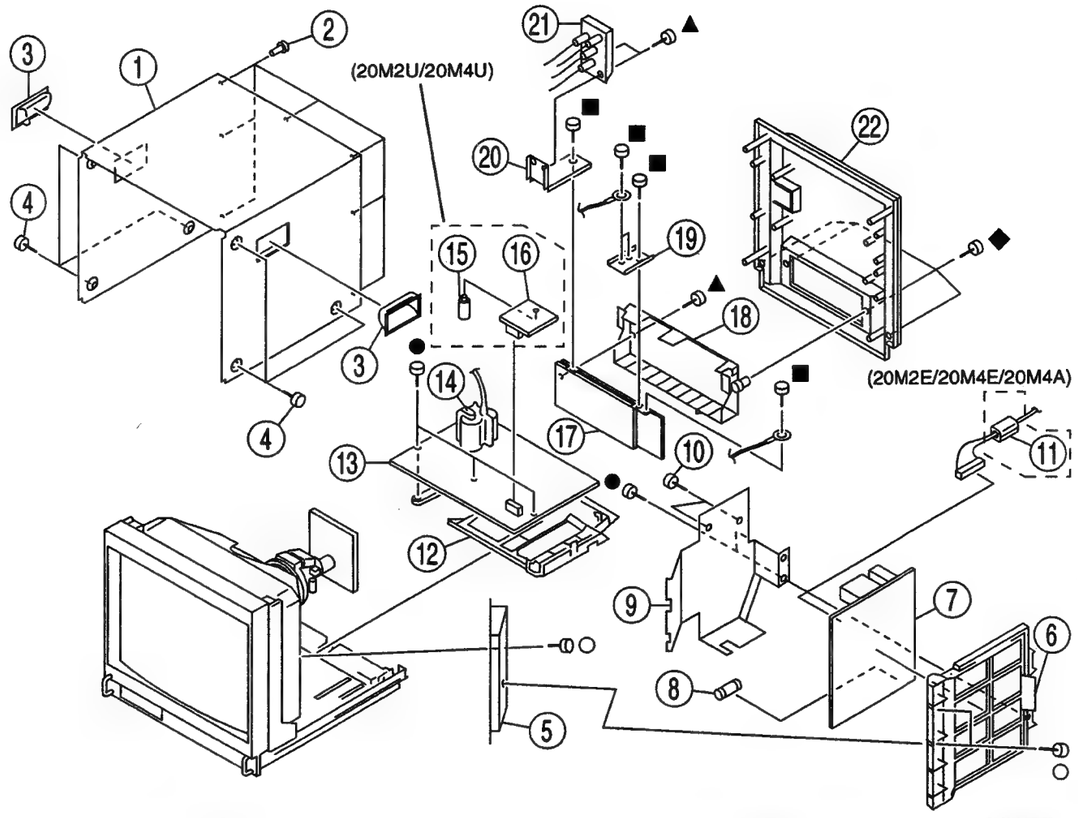

REF. NO.	PART NO.	DESCRIPTION	REMARK
1	4-057-973-11	COVER, TOP	
2	4-391-825-01	RIVET, NYLON	
3	4-043-825-01	HANDLE	
4	4-847-802-11	SCREW (OS), CASE, CLAW	
5	X-4391-825-1	HOOK ASSY, F	
6	*4-043-689-01	BRACKET, G	
7	*A-1316-302-A	G BOARD, COMPLETE	
8	⚠1-576-231-11	FUSE (H.B.C.) 4A/250V	
9	*4-057-974-01	SHIELD, G PC BOARD	
10	4-382-854-11	SCREW (M3X10), P,SW (+)	
11	1-543-653-11	CORE ASSY, BEAD (DIVISION TYPE) (20M2E/20M4E/20M4A)	
12	*4-043-690-01	BRACKET, MAIN	
13	*A-1298-003-A	A BOARD, COMPLETE (20M4U/E/A)	
	*A-1298-005-A	A BOARD, COMPLETE (20M2U/E)	
14	⚠1-453-234-11	TRANSFORMER ASSY, FLYBACK	
15	*3-687-542-41	SPACER, PC BOARD SPACE (20M2U/20M4U)	
16	*A-1390-705-A	S BOARD, COMPLETE (20M2U/20M4U)	
17	1-537-735-14	TERMINAL BOARD ASSY, I/O (A) (Q BOARD)	
18	4-043-688-01	PANEL, CONNECTOR	
19	*4-058-363-01	TERMINAL, EARTH	
20	4-057-971-01	BRACKET, FOCUS VOLUME	
21	⚠1-223-417-12	RESISTOR ASSY (HIGH-VOLTAGE) (20M4U/E/A)	
	⚠1-238-368-11	RESISTOR ASSY HIGH-VOLTAGE (20M2U/E)	
22	4-043-677-11	COVER, REAR	

7-2. PICTURE TUBE

● : 7-685-648-79 +BVTP 3X12
△ : 7-685-663-71 +BVTP 4X16
□ : 7-682-563-09 +B 4X12
▼ : 7-685-883-09 +BVTT 4X12
◇ : 7-685-664-79 +P 4X20

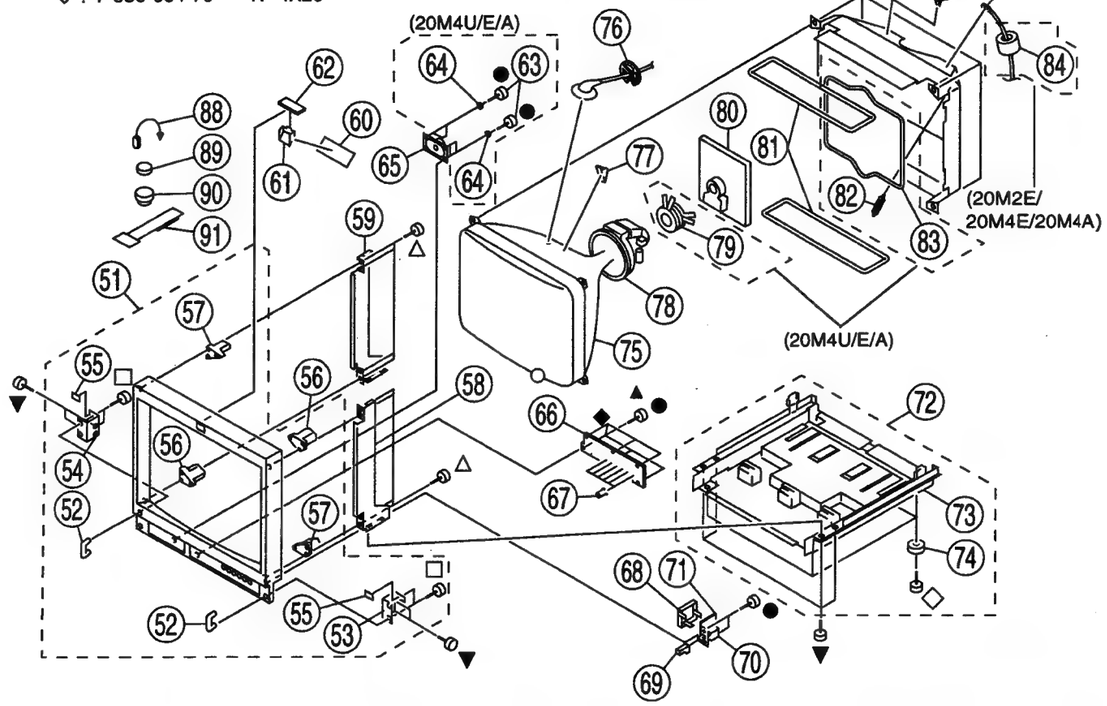

REF. NO.	PART NO.	DESCRIPTION	REMARK
51	X-4034-348-1	BEZEL ASSY (20M2U/E)	52-57
	X-4034-352-1	BEZEL ASSY (20M4U/E/A)	52-57
52	4-052-200-01	HANDLE, PROTECTOR	
53	*4-043-670-01	REINFORCEMENT (R), HANDLE	
54	*4-043-669-01	REINFORCEMENT (L), HANDLE	
55	*4-043-797-01	PLATE, BLIND	
56	*4-043-672-01	BRACKET (A), PICTURE TUBE	
57	*4-043-673-01	BRACKET (B), PICTURE TUBE	
58	*A-1450-186-A	BRACKET ASSY (R), SIDE	
59	*A-1450-185-A	BRACKET ASSY (L), SIDE	
60	4-044-606-01	CUSHION, TALLY	
61	*4-043-671-01	REFLECTOR, LED	
62	*A-1390-704-A	X BOARD, COMPLETE	
63	4-379-192-01	SCREW, TAPPING, STEP (20M4U/E/A)	
64	*4-379-189-01	CUSHION, SPEAKER (20M4U/E/A)	
65	1-544-063-12	SPEAKER	
66	*A-1372-302-A	H BOARD, COMPLETE	
67	4-043-802-02	KNOB, CONTROL	
68	4-043-681-01	COVER, AC SWITCH	
69	4-043-683-01	BUTTOM, POWER SWITCH	
70	⚠1-692-921-11	SWITCH,PUSH (A.C. POWER)	
71	*A-1388-193-A	J BOARD, COMPLETE	
72	*X-4032-770-1	CABINET ASSY, BOTTOM	73,74
73	*X-4031-740-1	CABINET, BOTTOM	
74	4-901-947-01	LEG	
75	⚠8-736-135-05	PICTURE TUBE 20FZS (DARK) (20M2U/E)	
	⚠8-736-379-05	PICTURE TUBE 20MT1 (PVM) (20M4E/A)	
	⚠8-736-381-05	PICTURE TUBE 20MT3 (PVM) (20M4U)	
76	3-704-372-01	HOLDER, HV CABLE	
77	3-703-961-01	SPACER, DY	
78	⚠1-451-349-11	DEFLECTION YOKE (Y20FZA) (20M2U/E)	
	⚠1-451-456-11	DEFLECTION YOKE (Y20MTA) (20M4U/E/A)	
79	⚠8-453-003-41	NA3012-M4 (20M4U/E/A)	
80	*A-1331-630-A	C BOARD, COMPLETE (20M2U/E)	
	*A-1331-628-A	C BOARD, COMPLETE (20M4U/E/A)	
81	⚠1-426-505-11	COIL, DEMAGNETIZATION	
82	*4-303-774-99	SPRING (20M4U/E/A)	
83	⚠1-411-657-11	COIL, LANDING CORRECTION (20M4U/E/A)	
84	1-543-827-11	CLAMP,SLEEVE FERRITE (20M2E/20M4E/20M4A)	
85	4-389-025-01	SCREW (M4) (EXT TOOTH WASHER)	
86	*4-387-284-01	HOLDER, LEAD	
87	4-365-808-01	SCREW (5), TAPPING	
88	4-308-870-00	CLIP,LEAD WIRE	
89	1-452-032-00	MAGNET,DISK ; 10mmø	
90	1-452-094-00	MAGNET,ROTATABLE DISK ; 15mmø	
91	4-051-736-21	PIECE A(90), CONV. CORRECT	

SECTION 8
ELECTRICAL PARTS LIST

A

NOTE:

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

- The components identified by ⊠ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

When indicating parts by reference number, please include the board name.

RESISTORS
- All resistors are in ohms
- F : nonflammable

- CAPACITORS
  PF : μμ F

- There are some cases the reference number on one board overlaps on the other board. Therefore, when ordering parts by the reference number, please include the board name.

REF. NO.	PART NO.	DESCRIPTION			REMARK
	* A-1298-003-A	A BOARD, COMPLETE (PVM-20M4U/E/A) **********			
	* A-1298-005-A	A BOARD, COMPLETE (PVM-20M2U/E) **********			
	1-540-044-11	SOCKET, IC (20M4U/E/A)			
	* 4-043-994-01	PLATE (CF), SHIELD			
	4-382-854-11	SCREW (M3X10), P, SW (+)			
	7-682-948-01	SCREW +PSW 3X8			
		<BAND PASS FILTER>			
BPF400	1-236-363-11	FILTER, BAND PASS			
		<CAPACITOR>			
C105	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C106	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C114	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C115	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C116	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C117	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C118	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C119	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C121	1-163-237-11	CERAMIC CHIP	27PF	5%	50V
C123	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C124	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C132	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C133	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C134	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C135	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C136	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C140	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C141	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C142	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C143	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C144	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C145	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C154	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C155	1-163-023-00	CERAMIC CHIP	0.015MF	10%	50V
C156	1-163-019-00	CERAMIC CHIP	0.0068MF	10%	50V
C157	1-163-019-00	CERAMIC CHIP	0.0068MF	10%	50V
C158	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C159	1-164-344-11	CERAMIC CHIP	0.068MF	10%	25V
C161	1-104-664-11	ELECT	47MF	20%	25V
C162	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C164	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C165	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C166	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C167	1-126-925-11	ELECT	470MF	20%	10V
C168	1-126-925-11	ELECT	470MF	20%	10V
C169	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C171	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C174	1-163-243-11	CERAMIC CHIP	47PF	5%	50V

REF. NO.	PART NO.	DESCRIPTION			REMARK
C200	1-126-963-11	ELECT	4.7MF	20%	50V
C201	1-137-353-11	MYLAR	0.047MF	10%	100V
C202	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C203	1-126-963-11	ELECT	4.7MF	20%	50V
C204	1-126-964-11	ELECT	10MF	20%	50V
C205	1-126-767-11	ELECT	1000MF	20%	16V
C206	1-128-526-11	ELECT	100MF	20%	25V
C207	1-104-665-11	ELECT	100MF	20%	25V
C208	1-126-964-11	ELECT	10MF	20%	50V
C209	1-126-963-11	ELECT	4.7MF	20%	50V
C300	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C301	1-163-086-00	CERAMIC CHIP	3PF	0.25PF	50V
C302	1-163-086-00	CERAMIC CHIP	3PF	0.25PF	50V
C304	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C305	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C306	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C309	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C310	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C311	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C312	1-126-961-11	ELECT	2.2MF	20%	50V
C313	1-163-145-00	CERAMIC CHIP	0.0015MF	5%	50V
C314	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C315	1-126-964-11	ELECT	10MF	20%	50V
C316	1-104-664-11	ELECT	47MF	20%	25V
C317	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C318	1-126-964-11	ELECT	10MF	20%	50V
C319	1-163-222-11	CERAMIC CHIP	5PF	0.25PF	50V
C320	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C322	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C323	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C324	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C325	1-126-964-11	ELECT	10MF	20%	50V
C326	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C327	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C328	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C329	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C330	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C331	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C332	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C333	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C334	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C335	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C336	1-104-664-11	ELECT	47MF	20%	25V
C337	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C338	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C339	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C340	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C341	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C342	1-163-018-00	CERAMIC CHIP	0.0056MF	10%	50V
C343	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C344	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C345	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C346	1-126-960-11	ELECT	1MF	20%	50V
C347	1-163-243-11	CERAMIC CHIP	47PF	5%	50V

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
C348	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C349	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C350	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C351	1-104-664-11	ELECT	47MF	20%	25V
C352	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C353	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C354	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C355	1-126-960-11	ELECT	1MF	20%	50V
C356	1-126-963-11	ELECT	4.7MF	20%	50V
C357	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C358	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C359	1-104-664-11	ELECT	47MF	20%	25V
C360	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C361	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C362	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C363	1-163-099-00	CERAMIC CHIP	18PF	5%	50V
C364	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C365	1-106-343-00	MYLAR	0.001MF	10%	100V
C366	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C367	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C368	1-124-261-00	ELECT	10MF	20%	50V
C369	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C370	1-104-664-11	ELECT	47MF	20%	25V
C371	1-104-664-11	ELECT	47MF	20%	25V
C372	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C373	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C374	1-126-960-11	ELECT	1MF	20%	50V
C375	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C376	1-126-959-11	ELECT	0.47MF	20%	50V
C377	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C378	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C379	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C380	1-126-767-11	ELECT	1000MF	20%	16V
C381	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C382	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C383	1-104-664-11	ELECT	47MF	20%	25V
C384	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C385	1-104-664-11	ELECT	47MF	20%	25V
C386	1-124-261-00	ELECT	10MF	20%	50V
C387	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C388	1-124-261-00	ELECT	10MF	20%	50V
C389	1-104-664-11	ELECT	47MF	20%	25V
C390	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C391	1-104-664-11	ELECT	47MF	20%	25V
C392	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C393	1-164-298-11	CERAMIC CHIP	0.15MF	10%	25V
C394	1-104-664-11	ELECT	47MF	20%	25V
C395	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C396	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C397	1-104-664-11	ELECT	47MF	20%	25V
C398	1-104-664-11	ELECT	47MF	20%	25V
C399	1-104-664-11	ELECT	47MF	20%	25V
C400	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C401	1-164-346-11	CERAMIC CHIP	1MF		16V
C402	1-126-967-11	ELECT	47MF	20%	50V
C403	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C406	1-126-965-11	ELECT	22MF	20%	50V
C407	1-104-664-11	ELECT	47MF	20%	25V
C408	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C409	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C410	1-126-965-11	ELECT	22MF	20%	50V
C411	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C414	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C415	1-126-964-11	ELECT	10MF	20%	50V
C416	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C417	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C418	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C419	1-126-925-11	ELECT	470MF	20%	10V
C420	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V

REF. NO.	PART NO.	DESCRIPTION			REMARK
C421	1-164-222-11	CERAMIC CHIP	0.22MF		25V
C422	1-126-960-11	ELECT	1MF	20%	50V
C423	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C424	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C426	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C427	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C428	1-104-661-91	ELECT	330MF	20%	16V
C429	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C430	1-104-661-91	ELECT	330MF	20%	16V
C431	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C432	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C433	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C434	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C435	1-163-089-00	CERAMIC CHIP	6PF	0.25PF	50V
C436	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C437	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C438	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C439	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C440	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C441	1-126-962-11	ELECT	3.3MF	20%	50V
C442	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C443	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C444	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C445	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C446	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C447	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C448	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C449	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C450	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C451	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C452	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C453	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C454	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C455	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C456	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C457	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C458	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C459	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C460	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C461	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C462	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C463	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C464	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C465	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C466	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C467	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C469	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C470	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C471	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C472	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C473	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C475	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C476	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C477	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C478	1-126-964-11	ELECT	10MF	20%	50V
C479	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C482	1-126-925-11	ELECT	470MF	20%	10V
C483	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C484	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C485	1-163-113-00	CERAMIC CHIP	68PF	5%	50V
C486	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C487	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C490	1-164-336-11	CERAMIC CHIP	0.33MF		25V
C491	1-164-336-11	CERAMIC CHIP	0.33MF		25V
C492	1-164-336-11	CERAMIC CHIP	0.33MF		25V
C493	1-104-760-11	CERAMIC CHIP	0.047MF	10%	50V
C494	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C495	1-126-964-11	ELECT	10MF	20%	50V
C496	1-163-249-11	CERAMIC CHIP	82PF	5%	50V

The componants identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
C497	1-163-011-11	CERAMIC CHIP	0.0015MF	10%	50V
C498	1-126-961-11	ELECT	2.2MF	20%	50V
C499	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C500	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C501	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C502	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C503	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C504	1-136-495-11	FILM	0.068MF	5%	50V
C505	1-163-199-00	CERAMIC CHIP	560PF	5%	50V
C506	1-126-959-11	ELECT	0.47MF	20%	50V
C507	1-128-526-11	ELECT	100MF	20%	25V
C508	1-130-497-00	MYLAR	0.15MF	5%	50V
C509	1-128-566-11	ELECT	470MF	20%	100V
C511	1-107-368-11	FILM	0.047MF	10%	200V
C512	1-126-959-11	ELECT	0.47MF	20%	50V
C513	1-124-261-00	ELECT	10MF	20%	50V
C514	⚠1-129-718-91	FILM	0.022MF	10%	630V
C515	1-163-809-11	CERAMIC CHIP	0.047MF	10%	25V
C516	1-102-030-00	CERAMIC	330PF	10%	500V
C517	1-163-024-00	CERAMIC CHIP	0.018MF	10%	50V
C518	1-107-947-11	ELECT	220MF	20%	160V
C519	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C520	1-163-257-11	CERAMIC CHIP	180PF	5%	50V
C521	1-162-114-00	CERAMIC	0.0047MF		2KV
C522	1-126-768-11	ELECT	2200MF	20%	16V
C523	1-107-902-11	ELECT	1MF	20%	50V
C525	⚠1-136-081-00	FILM	0.012MF	3%	2KV (20M2U/E)
C525	⚠1-136-904-11	FILM	0.0115MF	3%	2KV (20M4U/E/A)
C526	⚠1-162-116-91	CERAMIC	680PF	10%	2KV
C529	1-107-901-11	ELECT	0.47MF	20%	50V
C530	1-104-666-11	ELECT	220MF	20%	25V
C531	1-104-664-11	ELECT	47MF	20%	25V
C532	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C533	1-102-212-00	CERAMIC	820PF	10%	500V
C534	1-107-662-11	ELECT	22MF	20%	250V
C537	1-126-971-11	ELECT	470MF	20%	50V
C538	1-137-150-11	MYLAR	0.01MF	10%	100V
C539	1-130-480-00	FILM	0.0056MF	5%	50V
C540	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C541	1-107-905-11	ELECT	4.7MF	20%	50V
C542	1-136-481-11	MYLAR	0.0022MF	10%	100V
C543	1-136-481-11	MYLAR	0.0022MF	10%	100V
C544	1-137-150-11	MYLAR	0.01MF	10%	100V
C545	1-102-212-00	CERAMIC	820PF	10%	500V
C546	1-163-119-00	CERAMIC CHIP	120PF	5%	50V
C547	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C548	1-102-212-00	CERAMIC	820PF	10%	500V
C549	1-107-906-11	ELECT	10MF	20%	50V
C550	1-107-905-11	ELECT	4.7MF	20%	50V
C551	1-106-375-12	MYLAR	0.022MF	10%	100V
C552	1-107-889-11	ELECT	220MF	20%	25V
C553	1-106-389-00	MYLAR	0.082MF	10%	200V
C554	1-130-736-11	FILM	0.01MF	5%	50V
C555	1-126-964-11	ELECT	10MF	20%	50V
C556	1-126-964-11	ELECT	10MF	20%	50V
C557	1-106-381-12	MYLAR	0.039MF	10%	100V
C558	1-126-960-11	ELECT	1MF	20%	50V
C559	1-136-173-00	FILM	0.47MF	5%	50V
C561	1-136-159-00	FILM	0.033MF	5%	50V
C564	1-126-964-11	ELECT	10MF	20%	50V
C565	1-126-960-11	ELECT	1MF	20%	50V
C566	1-137-150-11	MYLAR	0.01MF	10%	100V
C567	1-136-499-11	FILM	0.047MF	5%	50V
C568	1-126-960-11	ELECT	1MF	20%	50V
C569	1-131-350-00	TANTALUM	3.3MF	10%	25V
C570	1-126-767-11	ELECT	1000MF	20%	16V
C571	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V

REF. NO.	PART NO.	DESCRIPTION			REMARK
C572	1-104-709-11	ELECT	4.7MF	0	160V
C573	1-136-177-00	FILM	1MF	5%	50V
C575	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C576	1-102-244-00	CERAMIC	220PF	10%	500V
C577	1-107-906-11	ELECT	10MF	20%	50V
C578	1-136-111-00	FILM	1MF	5%	200V
C579	1-107-910-11	ELECT	100MF	20%	50V
C580	1-136-105-00	FILM	0.33MF	5%	200V
C581	1-126-963-11	ELECT	4.7MF	20%	50V
C582	1-102-002-00	CERAMIC	680PF	10%	500V
C583	1-136-541-11	FILM	1.5MF	5%	200V
C584	1-107-949-11	ELECT	2.2MF	20%	160V
C585	1-107-960-11	ELECT	4.7MF	20%	250V
C586	1-126-942-61	ELECT	1000MF	20%	25V
C587	1-102-030-00	CERAMIC	330PF	10%	500V
C588	1-107-906-11	ELECT	10MF	20%	50V
C589	1-102-030-00	CERAMIC	330PF	10%	500V
C590	1-107-903-11	ELECT	2.2MF	20%	50V
C591	1-107-365-91	FILM	0.015MF	10%	200V
C592	1-107-635-11	ELECT	4.7MF	20%	160V
C593	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C594	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C595	1-107-889-11	ELECT	220MF	20%	25V
C596	1-104-665-11	ELECT	100MF	20%	25V
C597	1-164-346-11	CERAMIC CHIP	1MF		16V
C598	1-164-346-11	CERAMIC CHIP	1MF		16V
C599	1-124-261-00	ELECT	10MF	20%	50V
C1300	1-104-664-11	ELECT	47MF	20%	25V
C1301	1-104-664-11	ELECT	47MF	20%	25V
C1302	1-163-131-00	CERAMIC CHIP	390PF	5%	50V
C1304	1-104-664-11	ELECT	47MF	20%	25V
C1305	1-104-664-11	ELECT	47MF	20%	25V
C1306	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1307	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1308	1-126-933-11	ELECT	100MF	20%	10V
C1309	1-163-257-11	CERAMIC CHIP	180PF	5%	50V
C1310	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1311	1-104-664-11	ELECT	47MF	20%	25V
C1312	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1313	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1314	1-104-664-11	ELECT	47MF	20%	25V
C1315	1-104-664-11	ELECT	47MF	20%	25V
C1316	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1317	1-104-664-11	ELECT	47MF	20%	25V
C1318	1-104-664-11	ELECT	47MF	20%	25V
C1319	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C1320	1-104-664-11	ELECT	47MF	20%	25V
C1321	1-104-664-11	ELECT	47MF	20%	25V
C1322	1-126-934-11	ELECT	220MF	20%	16V
C1323	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1324	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1325	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1326	1-104-664-11	ELECT	47MF	20%	25V
C1327	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1328	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1329	1-126-964-11	ELECT	10MF	20%	50V
C1330	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1331	1-104-664-11	ELECT	47MF	20%	25V
C1332	1-104-664-11	ELECT	47MF	20%	25V
C1333	1-104-664-11	ELECT	47MF	20%	25V
C1334	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C1335	1-104-664-11	ELECT	47MF	20%	25V
C1336	1-104-664-11	ELECT	47MF	20%	25V
C1338	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1339	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1340	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1341	1-163-275-11	CERAMIC CHIP	0.001MF	5%	50V
C1342	1-163-105-00	CERAMIC CHIP	33PF	5%	50V
C1343	1-163-113-00	CERAMIC CHIP	68PF	5%	50V

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
C1344	1-163-083-00	CERAMIC CHIP	1PF	0.25PF	50V
C1345	1-124-261-00	ELECT	10MF	20%	50V
C1346	1-124-589-11	ELECT	47MF	20%	16V
C1347	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1348	1-163-127-00	CERAMIC CHIP	270PF	5%	50V
C1349	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C1350	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C1351	1-126-960-11	ELECT	1MF	20%	50V
C1352	1-163-023-00	CERAMIC CHIP	0.015MF	10%	50V
C1353	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1354	1-163-121-00	CERAMIC CHIP	150PF	5%	50V
C1355	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C1356	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1357	1-104-661-91	ELECT	330MF	20%	16V
C1358	1-124-589-11	ELECT	47MF	20%	16V
C1359	1-163-263-11	CERAMIC CHIP	330PF	5%	50V
C1360	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C1362	1-163-249-11	CERAMIC CHIP	82PF	5%	50V
C1363	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1364	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C1365	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V
C1366	1-104-664-11	ELECT	47MF	20%	25V
C1367	1-104-664-11	ELECT	47MF	20%	25V
C1369	1-163-237-11	CERAMIC CHIP	27PF	5%	50V
C1370	1-163-237-11	CERAMIC CHIP	27PF	5%	50V
C1372	1-104-664-11	ELECT	47MF	20%	25V
C1373	1-104-664-11	ELECT	47MF	20%	25V
C1374	1-104-664-11	ELECT	47MF	20%	25V
C1375	1-126-963-11	ELECT	4.7MF	20%	50V
C1378	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C1380	1-163-163-00	CERAMIC CHIP	18PF	5%	50V
C1381	1-163-163-00	CERAMIC CHIP	18PF	5%	50V
C1382	1-126-933-11	ELECT	100MF	20%	10V
C1383	1-104-664-11	ELECT	47MF	20%	25V
C1384	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C1385	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1386	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1387	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1388	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
C1393	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C1400	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1401	1-136-173-00	FILM	0.47MF	5%	50V
C1402	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1403	1-136-173-00	FILM	0.47MF	5%	50V
C1404	1-164-299-11	CERAMIC CHIP	0.22MF	10%	25V
C1405	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C1406	1-163-090-00	CERAMIC CHIP	7PF	0.25PF	50V
C1407	1-163-085-00	CERAMIC CHIP	2PF	0.25PF	50V
C1408	1-163-107-00	CERAMIC CHIP	39PF	5%	50V
C1500	1-126-768-11	ELECT	2200MF	20%	16V
C1501	1-126-925-11	ELECT	470MF	20%	10V
C1505	1-136-165-00	FILM	0.1MF	5%	50V
C1506	1-104-661-91	ELECT	330MF	20%	16V
C1507	1-163-141-00	CERAMIC CHIP	0.001MF	5%	50V
C1508	1-126-963-11	ELECT	4.7MF	20%	50V
C1509	1-126-964-11	ELECT	10MF	20%	50V
C1510	1-126-963-11	ELECT	4.7MF	20%	50V
C1511	1-164-182-11	CERAMIC CHIP	0.0033MF	10%	50V
C1512	1-126-963-11	ELECT	4.7MF	20%	50V
C1513	1-163-197-00	CERAMIC CHIP	470PF	5%	50V
C1514	1-130-477-00	MYLAR	0.0033MF	5%	50V
C1515	1-126-964-11	ELECT	10MF	20%	50V
C1516	1-163-063-91	CERAMIC CHIP	0.022MF	10%	50V
C1517	1-128-526-11	ELECT	100MF	20%	10V
C1518	1-107-909-11	ELECT	47MF	20%	16V
C1520	1-162-129-00	CERAMIC	150PF	10%	2KV
C1521	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C1524	1-107-910-11	ELECT	100MF	20%	50V (20M4U/E/A)
C1525	1-162-114-00	CERAMIC	0.0047MF		2KV (20M4U/E/A)
C1530	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C1531	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V (20M4U/E/A)
C1532	1-104-664-11	ELECT	47MF	20%	25V (20M4U/E/A)
C1534	1-104-664-11	ELECT	47MF	20%	25V (20M4U/E/A)
C1535	1-104-664-11	ELECT	47MF	20%	25V (20M4U/E/A)
C1536	1-136-165-00	FILM	0.1MF	5%	50V (20M4U/E/A)
C1537	1-130-783-00	MYLAR	0.33MF	10%	100V (20M4U/E/A)
C1538	1-102-074-00	CERAMIC	0.001MF	10%	50V
C2501	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V
C2502	1-164-232-11	CERAMIC CHIP	0.01MF	10%	50V

<CONNECTOR>

CN101	*1-573-979-11	CONNECTOR, BOARD TO BOARD 11P
CN102	*1-564-514-11	PLUG, CONNECTOR 11P
CN104	*1-564-506-11	PLUG, CONNECTOR 3P
CN105	*1-565-503-11	CONNECTOR, BOARD TO BOARD 12P
CN201	*1-564-506-11	PLUG, CONNECTOR 3P
CN301	*1-564-514-11	PLUG, CONNECTOR 11P
CN302	*1-564-510-11	PLUG, CONNECTOR 7P
CN303	*1-766-745-11	CONNECTOR, BOARD TO BOARD 12P
CN305	1-779-070-21	PIN, CONNECTOR 12P
CN401	*1-564-511-11	PLUG, CONNECTOR 8P
CN402	*1-564-515-11	PLUG, CONNECTOR 12P
CN501	*1-568-536-11	PLUG (MINIATURE DY) 6P (20M4U/E/A)
CN501	*1-580-798-11	CONNECTOR PIN (DY) 6P (20M2U/E)
CN502	*1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P
CN503	*1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P
CN504	*1-564-506-11	PLUG, CONNECTOR 3P
CN505	*1-564-506-11	PLUG, CONNECTOR 3P
CN507	1-695-915-11	TAB (CONTACT)
CN508	1-766-240-11	PIN, CONNECTOR (PC BOARD) 2P
CN509	*1-564-506-11	PLUG, CONNECTOR 3P (20M4U/E/A)

<COMPOSITION CIRCUIT BLOCK>

CP300	1-236-366-11	MODULE, TRAP
CP301	1-236-365-11	MODULE, TRAP
CP302	1-808-654-21	MODULE
CP303	1-466-162-61	FILTER BLOCK, COM (CFB-4)

<DIODE>

D100	8-719-404-49	DIODE MA111
D101	8-719-800-76	DIODE 1SS226
D102	8-719-800-76	DIODE 1SS226
D103	8-719-045-70	DIODE 1SV230TPH3
D104	8-719-800-76	DIODE 1SS226
D105	8-719-800-76	DIODE 1SS226
D107	8-719-800-76	DIODE 1SS226
D108	8-719-104-34	DIODE 1S2836
D109	8-719-801-78	DIODE 1SS184
D111	8-719-977-05	DIODE DTZ6.2
D114	8-719-404-49	DIODE MA111
D115	8-719-977-05	DIODE DTZ6.2
D116	8-719-404-49	DIODE MA111
D200	8-719-977-46	DIODE DTZ13C
D300	8-719-025-07	DIODE 1SV232-TPH3
D301	8-719-404-49	DIODE MA111
D303	8-719-977-05	DIODE DTZ6.2
D304	8-719-801-78	DIODE 1SS184
D305	8-719-800-76	DIODE 1SS226
D307	8-719-404-49	DIODE MA111

A

REF. NO.	PART NO.	DESCRIPTION	REMARK
D308	8-719-404-49	DIODE MA111	
D309	8-719-404-49	DIODE MA111	
D310	8-719-104-34	DIODE 1S2836	
D311	8-719-045-70	DIODE 1SV230TPH3	
D313	8-719-801-78	DIODE 1SS184	
D314	8-719-404-49	DIODE MA111	
D315	8-719-404-49	DIODE MA111	
D317	8-719-404-49	DIODE MA111	
D320	8-719-404-49	DIODE MA111	
D322	8-719-404-49	DIODE MA111	
D323	8-719-404-49	DIODE MA111	
D324	8-719-045-70	DIODE 1SV230TPH3	
D325	8-719-801-78	DIODE 1SS184	
D326	8-719-045-70	DIODE 1SV230TPH3	
D327	8-719-104-34	DIODE 1S2836	
D332	8-719-404-49	DIODE MA111	
D333	8-719-404-49	DIODE MA111	
D335	8-719-404-49	DIODE MA111	
D336	8-719-404-49	DIODE MA111	
D337	8-719-404-49	DIODE MA111	
D338	8-719-404-49	DIODE MA111	
D339	8-719-404-49	DIODE MA111	
D344	8-719-801-78	DIODE 1SS184	
D345	8-719-104-34	DIODE 1S2836	
D346	8-719-104-34	DIODE 1S2836	
D347	8-719-104-34	DIODE 1S2836	
D360	1-216-295-91	CONDUCTOR, CHIP	
D361	1-216-295-91	CONDUCTOR, CHIP	
D362	8-719-158-40	DIODE RD10SB1	
D363	8-719-158-40	DIODE RD10SB1	
D364	8-719-104-34	DIODE 1S2836	
D365	8-719-404-49	DIODE MA111	
D381	8-719-404-49	DIODE MA111	
D401	8-719-404-49	DIODE MA111	
D404	8-719-800-76	DIODE 1SS226	
D405	8-719-801-78	DIODE 1SS184	
D406	8-719-404-49	DIODE MA111	
D407	8-719-404-49	DIODE MA111	
D408	8-719-404-49	DIODE MA111	
D410	8-719-404-49	DIODE MA111	
D411	8-719-404-49	DIODE MA111	
D414	8-719-801-78	DIODE 1SS184	
D415	8-719-801-78	DIODE 1SS184	
D416	8-719-801-78	DIODE 1SS184	
D417	8-719-801-78	DIODE 1SS184	
D418	8-719-801-78	DIODE 1SS184	
D421	8-719-404-49	DIODE MA111	
D422	8-719-404-49	DIODE MA111	
D423	8-719-800-76	DIODE 1SS226	
D424	8-719-404-49	DIODE MA111	
D425	8-719-800-76	DIODE 1SS226	
D427	8-719-404-49	DIODE MA111	
D500	8-719-404-49	DIODE MA111	
D501	8-719-977-03	DIODE DTZ5.6B	
D502	8-719-979-80	DIODE UF5406	
D503	8-719-404-49	DIODE MA111	
D504	8-719-901-83	DIODE 1SS83	
D505	8-719-028-72	DIODE RGP02-17EL-6433	
D506	8-719-033-83	DIODE ERD07-15	
D507	8-719-800-76	DIODE 1SS226	
D508	8-719-800-76	DIODE 1SS226	
D509	8-719-404-49	DIODE MA111	
D510	8-719-302-43	DIODE EL1Z	
D512	8-719-979-80	DIODE UF5406	
D513	8-719-404-49	DIODE MA111	
D514	8-719-971-20	DIODE ERC38-06	
D515	8-719-971-20	DIODE ERC38-06	
D516	8-719-404-49	DIODE MA111	
D517	8-719-404-49	DIODE MA111	
D518	8-719-404-49	DIODE MA111	
D519	8-719-404-49	DIODE MA111	
D520	8-719-801-78	DIODE 1SS184	
D521	8-719-404-49	DIODE MA111	
D522	8-719-977-05	DIODE DTZ6.2	
D523	8-719-920-76	DIODE 1S2076	
D524	8-719-200-02	DIODE 10E-2	
D525	8-719-200-02	DIODE 10E-2	
D526	8-719-404-49	DIODE MA111	
D527	8-719-200-02	DIODE 10E-2	
D528	8-719-300-76	DIODE RH-1A	
D529	8-719-200-02	DIODE 10E-2	
D530	8-719-300-76	DIODE RH-1A	
D531	8-719-977-32	DIODE DTZ11B	
D532	8-719-800-76	DIODE 1SS226	
D533	8-719-302-43	DIODE EL1Z	
D534	8-719-404-49	DIODE MA111	
D535	8-719-404-49	DIODE MA111	
D536	8-719-800-76	DIODE 1SS226	
D537	8-719-800-76	DIODE 1SS226	
D538	8-719-800-76	DIODE 1SS226	
D539	8-719-920-76	DIODE 1S2076	
D540	8-719-404-49	DIODE MA111	
D541	8-719-801-78	DIODE 1SS184	
D542	8-719-404-49	DIODE MA111	
D543	8-719-404-49	DIODE MA111	
D544	8-719-404-49	DIODE MA111 (20M4U/E/A)	
D545	8-719-404-49	DIODE MA111 (20M4U/E/A)	
D546	8-719-901-19	DIODE V11N (20M4U/E/A)	
D547	8-719-404-49	DIODE MA111	
D548	8-719-110-46	DIODE RD16ESB3 (20M4U/E/A)	
		<DELAY LINE>	
DL300	1-415-633-11	DELAY LINE, Y	
DL301	1-415-632-11	DELAY LINE, Y	
DL401	1-409-547-11	DELAY LINE	
		<FERRITE BEAD>	
FB501	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH	
		<FILTER>	
FL300	1-236-547-11	TRAP, LC	
FL401	1-236-364-11	FILTER, BAND PASS	
		<IC>	
IC101	1-540-044-11	SOCKET, IC (20M2U/E)	
IC101	8-759-462-05	IC uPD78P018FYCW-M01 (20M4U/E/A)	
IC102	8-759-354-28	IC ST24C02FM6TR	
IC103	8-759-008-48	IC MC74HC86F	
IC104	8-759-262-59	IC uPD6451AGT-632-E2	
IC105	8-759-196-70	IC M62358FP-E1	
IC106	8-759-196-70	IC M62358FP-E1	
IC107	8-759-196-70	IC M62358FP-E1	
IC108	8-759-042-02	IC S-80743AL-A7-S	
IC109	8-759-196-70	IC M62358FP-E1	
IC110	8-759-196-70	IC M62358FP-E1	
IC111	8-759-009-22	IC MC14094BF	
IC112	8-759-354-27	IC ST24C01FM6TR	
IC200	8-759-420-04	IC AN5265	
IC301	8-752-053-21	IC CXA1211M	
IC302	8-759-998-98	IC LM358D	
IC303	8-752-056-67	IC CXA1214P	
IC304	8-759-932-67	IC BU4053BCF	
IC305	8-759-631-08	IC M51279FP	
IC306	8-759-711-32	IC NJM2245M	

A

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION	REMARK
IC309	8-759-711-32	IC NJM2245M	
IC310	8-759-932-67	IC BU4053BCF	
IC311	8-759-008-67	IC MC14066BF	
IC312	8-759-711-32	IC NJM2245M	
IC313	8-759-287-89	IC MM1113XFF	
IC314	8-759-287-89	IC MM1113XFF	
IC315	8-759-932-67	IC BU4053BCF	
IC316	8-759-084-76	IC MM1111XF	
IC317	8-759-009-51	IC MC14538BF	
IC318	8-759-009-67	IC MC14584BF	
IC320	8-759-287-89	IC MM1113XFF	
IC321	8-759-287-89	IC MM1113XFF	
IC322	8-759-287-89	IC MM1113XFF	
IC323	8-759-287-89	IC MM1113XFF	
IC324	8-759-287-89	IC MM1113XFF	
IC325	8-759-287-89	IC MM1113XFF	
IC326	8-759-060-00	IC BA10324AF	
IC327	8-759-008-67	IC MC14066BF	
IC350	8-759-100-96	IC uPC4558G2	
IC401	8-759-196-69	IC BA7655AF-E2	
IC402	8-752-053-21	IC CXA1211M	
IC403	8-759-008-67	IC MC14066BF	
IC404	8-752-067-05	IC CXA1739S	
IC405	8-759-932-67	IC BU4053BCF	
IC406	8-759-998-98	IC LM358D	
IC407	8-759-008-67	IC MC14066BF	
IC408	8-759-509-91	IC XRA10393F	
IC409	8-759-060-00	IC BA10324AF	
IC410	8-759-009-06	IC MC14052BF	
IC411	8-759-008-92	IC MC14024BF	
IC412	8-759-932-67	IC BU4053BCF	
IC413	8-759-932-67	IC BU4053BCF	
IC500	8-749-010-08	IC H8D7249	
IC502	8-759-009-51	IC MC14538BF	
IC503	8-759-009-51	IC MC14538BF	
IC504	8-752-053-21	IC CXA1211M	
IC505	8-759-520-07	IC XRA17812T	
IC506	8-759-009-51	IC MC14538BF	
IC507	8-759-100-60	IC uPC1377C	
IC508	8-752-053-21	IC CXA1211M	
IC509	8-759-998-98	IC LM358D	
IC510	8-759-009-51	IC MC14538BF	
IC511	8-759-803-42	IC LA6500-FA (20M4U/E/A)	
IC512	8-759-929-65	IC LM7912CT (20M4U/E/A)	
		<CHIP CONDUCTOR>	
JR302	1-216-295-91	CONDUCTOR, CHIP	
JR307	1-216-295-91	CONDUCTOR, CHIP	
JR310	1-216-295-91	CONDUCTOR, CHIP	
		<COIL>	
L101	1-408-609-41	INDUCTOR 33UH	
L102	1-408-417-00	INDUCTOR 47UH	
L104	1-408-425-00	INDUCTOR 220UH	
L105	1-410-482-31	INDUCTOR 100UH	
L300	1-410-478-11	INDUCTOR 47UH	
L301	1-408-411-00	INDUCTOR 15UH	
L302	1-412-008-31	INDUCTOR CHIP 15UH	
L303	1-408-416-00	INDUCTOR 39UH	
L304	1-412-008-31	INDUCTOR CHIP 15UH	
L305	1-410-196-11	INDUCTOR CHIP 2.2UH	
L306	1-408-416-00	INDUCTOR 39UH	
L307	1-408-411-00	INDUCTOR 15UH	
L308	1-410-466-41	INDUCTOR 4.7UH	
L309	1-410-470-11	INDUCTOR 10UH	
L311	1-410-470-11	INDUCTOR 10UH	
L312	1-412-011-31	INDUCTOR CHIP 27UH	
L314	1-412-011-31	INDUCTOR CHIP 27UH	
L316	1-412-011-31	INDUCTOR CHIP 27UH	
L317	1-410-090-41	INDUCTOR 18mH	
L319	1-408-421-00	INDUCTOR 100UH	
L320	1-410-682-31	INDUCTOR 470UH	
L401	1-410-478-11	INDUCTOR 47UH	
L402	1-410-215-31	INDUCTOR CHIP 82UH	
L403	1-410-215-31	INDUCTOR CHIP 82UH	
L404	1-410-215-31	INDUCTOR CHIP 82UH	
L405	1-408-419-00	INDUCTOR 68UH	
L406	1-408-419-00	INDUCTOR 68UH	
L407	1-408-413-00	INDUCTOR 22UH	
L408	1-408-413-00	INDUCTOR 22UH	
L409	1-410-215-31	INDUCTOR CHIP 82UH	
L500	1-459-155-00	COIL (WITH CORE) 45UH	
L501	1-407-365-00	COIL,CHOKE	
L502	1-407-365-00	COIL,CHOKE	
L503	1-410-093-11	INDUCTOR 33mH	
L504	1-410-666-31	INDUCTOR 18UH	
L505	1-410-671-31	INDUCTOR 47UH	
L506	1-459-087-00	COIL,HCC DUST CORE 3.9mH (20M4U/E/A)	
L506	1-459-104-00	COIL, DUST CORE (20M2U/E)	
L507	1-410-686-11	INDUCTOR 1mH	
L508	1-412-530-31	INDUCTOR 27UH	
L509	1-459-087-00	COIL,HCC DUST CORE 3.9mH	
L510	1-459-106-00	COIL,DUST CORE	
L512	⚠1-459-232-11	COIL, CORE	
L513	1-412-447-11	INDUCTOR 3.9mH	
L514	1-459-104-00	COIL, DUST CORE	
L515	1-459-059-00	COIL,DUST CORE	
L517	1-412-547-21	INDUCTOR 680UH	
		<NEON LAMP>	
NL500	1-519-526-11	LAMP, NEON	
		<TRANSISTOR>	
Q101	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q102	8-729-216-22	TRANSISTOR 2SA1162-G	
Q103	8-729-216-22	TRANSISTOR 2SA1162-G	
Q104	8-729-907-26	TRANSISTOR IMX1	
Q105	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q107	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q108	8-729-422-29	TRANSISTOR 2SD601A-S	
Q109	8-729-422-29	TRANSISTOR 2SD601A-S	
Q110	8-729-422-29	TRANSISTOR 2SD601A-S	
Q111	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q112	8-729-422-29	TRANSISTOR 2SD601A-S	
Q113	8-729-422-29	TRANSISTOR 2SD601A-S	
Q114	8-729-422-29	TRANSISTOR 2SD601A-S	
Q200	8-729-140-96	TRANSISTOR 2SD774-34	
Q201	8-729-422-29	TRANSISTOR 2SD601A-S	
Q300	8-729-422-29	TRANSISTOR 2SD601A-S	
Q301	8-729-422-29	TRANSISTOR 2SD601A-S	
Q302	8-729-216-22	TRANSISTOR 2SA1162-G	
Q303	8-729-422-29	TRANSISTOR 2SD601A-S	
Q305	8-729-422-29	TRANSISTOR 2SD601A-S	
Q306	8-729-422-29	TRANSISTOR 2SD601A-S	
Q307	8-729-422-29	TRANSISTOR 2SD601A-S	
Q308	8-729-422-29	TRANSISTOR 2SD601A-S	
Q309	8-729-422-37	TRANSISTOR 2SB709A-R	
Q310	8-729-422-37	TRANSISTOR 2SB709A-R	
Q311	8-729-422-37	TRANSISTOR 2SB709A-R	
Q312	8-729-422-29	TRANSISTOR 2SD601A-S	
Q313	8-729-422-37	TRANSISTOR 2SB709A-R	
Q314	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q315	8-729-422-37	TRANSISTOR 2SB709A-R	
Q316	8-729-422-29	TRANSISTOR 2SD601A-S	

A

REF. NO.	PART NO.	DESCRIPTION	REMARK
Q318	8-729-422-37	TRANSISTOR 2SB709A-R	
Q319	8-729-422-29	TRANSISTOR 2SD601A-S	
Q320	8-729-422-29	TRANSISTOR 2SD601A-S	
Q321	8-729-422-29	TRANSISTOR 2SD601A-S	
Q322	8-729-422-29	TRANSISTOR 2SD601A-S	
Q323	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q324	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q325	8-729-422-29	TRANSISTOR 2SD601A-S	
Q326	8-729-422-29	TRANSISTOR 2SD601A-S	
Q327	8-729-422-37	TRANSISTOR 2SB709A-R	
Q328	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q329	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q330	8-729-422-37	TRANSISTOR 2SB709A-R	
Q331	8-729-422-37	TRANSISTOR 2SB709A-R	
Q332	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q333	8-729-422-29	TRANSISTOR 2SD601A-S	
Q334	8-729-422-37	TRANSISTOR 2SB709A-R	
Q335	8-729-422-29	TRANSISTOR 2SD601A-S	
Q336	8-729-109-44	TRANSISTOR 2SK94-X4	
Q337	8-729-422-29	TRANSISTOR 2SD601A-S	
Q338	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q339	8-729-422-37	TRANSISTOR 2SB709A-R	
Q341	8-729-920-39	TRANSISTOR IMT1US	
Q342	8-729-920-39	TRANSISTOR IMT1US	
Q343	8-729-920-39	TRANSISTOR IMT1US	
Q345	8-729-422-29	TRANSISTOR 2SD601A-S	
Q346	8-729-422-29	TRANSISTOR 2SD601A-S	
Q347	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q348	8-729-422-37	TRANSISTOR 2SB709A-R	
Q349	8-729-422-37	TRANSISTOR 2SB709A-R	
Q350	8-729-422-37	TRANSISTOR 2SB709A-R	
Q351	8-729-422-29	TRANSISTOR 2SD601A-S	
Q352	8-729-422-29	TRANSISTOR 2SD601A-S	
Q353	8-729-422-29	TRANSISTOR 2SD601A-S	
Q354	8-729-422-29	TRANSISTOR 2SD601A-S	
Q355	8-729-422-29	TRANSISTOR 2SD601A-S	
Q356	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q357	8-729-422-29	TRANSISTOR 2SD601A-S	
Q358	8-729-422-29	TRANSISTOR 2SD601A-S	
Q359	8-729-422-37	TRANSISTOR 2SB709A-R	
Q360	8-729-907-26	TRANSISTOR IMX1	
Q361	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q362	8-729-422-29	TRANSISTOR 2SD601A-S	
Q363	8-729-422-29	TRANSISTOR 2SD601A-S	
Q364	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q366	8-729-422-37	TRANSISTOR 2SB709A-R	
Q367	8-729-422-37	TRANSISTOR 2SB709A-R	
Q368	8-729-422-37	TRANSISTOR 2SB709A-R	
Q369	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q372	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q373	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q401	8-729-422-29	TRANSISTOR 2SD601A-S	
Q402	8-729-422-29	TRANSISTOR 2SD601A-S	
Q403	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q404	8-729-422-37	TRANSISTOR 2SB709A-R	
Q405	8-729-422-37	TRANSISTOR 2SB709A-R	
Q406	8-729-422-29	TRANSISTOR 2SD601A-S	
Q407	8-729-422-29	TRANSISTOR 2SD601A-S	
Q408	8-729-422-37	TRANSISTOR 2SB709A-R	
Q409	8-729-422-37	TRANSISTOR 2SB709A-R	
Q410	8-729-907-26	TRANSISTOR IMX1	
Q411	8-729-422-29	TRANSISTOR 2SD601A-S	
Q412	8-729-216-22	TRANSISTOR 2SA1162-G	
Q413	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q414	8-729-422-37	TRANSISTOR 2SB709A-R	
Q415	8-729-422-37	TRANSISTOR 2SB709A-R	
Q416	8-729-422-37	TRANSISTOR 2SB709A-R	
Q417	8-729-422-37	TRANSISTOR 2SB709A-R	
Q418	8-729-120-28	TRANSISTOR 2SC1623-L5L6	

REF. NO.	PART NO.	DESCRIPTION	REMARK
Q419	8-729-422-37	TRANSISTOR 2SB709A-R	
Q420	8-729-422-37	TRANSISTOR 2SB709A-R	
Q421	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q422	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q423	8-729-422-29	TRANSISTOR 2SD601A-S	
Q424	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q425	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q426	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q428	8-729-422-37	TRANSISTOR 2SB709A-R	
Q429	8-729-422-37	TRANSISTOR 2SB709A-R	
Q430	8-729-422-29	TRANSISTOR 2SD601A-S	
Q431	8-729-422-29	TRANSISTOR 2SD601A-S	
Q432	8-729-422-29	TRANSISTOR 2SD601A-S	
Q433	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q434	8-729-422-29	TRANSISTOR 2SD601A-S	
Q435	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q436	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q437	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q438	8-729-422-29	TRANSISTOR 2SD601A-S	
Q439	8-729-216-22	TRANSISTOR 2SA1162-G	
Q440	8-729-422-29	TRANSISTOR 2SD601A-S	
Q441	8-729-141-53	TRANSISTOR 2SK94-X2X3X4	
Q442	8-729-422-29	TRANSISTOR 2SD601A-S	
Q443	8-729-216-22	TRANSISTOR 2SA1162-G	
Q444	8-729-422-29	TRANSISTOR 2SD601A-S	
Q445	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q446	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q447	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q448	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q449	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q500	8-729-422-37	TRANSISTOR 2SB709A-R	
Q501	8-729-821-87	TRANSISTOR 2SD1878-CA	
Q502	8-729-119-80	TRANSISTOR 2SC2688-LK	
Q505	8-729-422-29	TRANSISTOR 2SD601A-S	
Q506	8-729-422-29	TRANSISTOR 2SD601A-S	
Q507	8-729-422-29	TRANSISTOR 2SD601A-S	
Q508	8-729-422-37	TRANSISTOR 2SB709A-R	
Q509	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q510	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q511	8-729-422-29	TRANSISTOR 2SD601A-S	
Q513	8-729-122-03	TRANSISTOR 2SA1220A-P	
Q514	8-729-901-00	TRANSISTOR DTC124EK	
Q515	8-729-106-92	TRANSISTOR 2SC2690A-Q	
Q516	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q517	8-729-027-38	TRANSISTOR DTA144EKA-T146	
Q518	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q519	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q520	8-729-021-82	TRANSISTOR 2SD2396K	
Q522	8-729-422-29	TRANSISTOR 2SD601A-S	
Q523	8-729-422-29	TRANSISTOR 2SD601A-S	
Q524	8-729-422-29	TRANSISTOR 2SD601A-S	
Q525	8-729-422-37	TRANSISTOR 2SB709A-R	
Q526	8-729-020-07	TRANSISTOR 2SC4686A(LBSONY)	(20M4U/E/A)
Q527	8-729-020-07	TRANSISTOR 2SC4686A(LBSONY)	(20M4U/E/A)
Q528	8-729-802-71	TRANSISTOR 2SA1407-D	
Q529	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q530	8-729-027-59	TRANSISTOR DTC144EKA-T146	
Q531	8-729-216-22	TRANSISTOR 2SA1162-G (20M4U/E/A)	
Q532	8-729-927-31	TRANSISTOR IRF520 (20M4U/E/A)	
Q2501	8-729-422-29	TRANSISTOR 2SD601A-S	

<RESISTOR>

R101	1-216-025-91	METAL GLAZE	100	%	1/10W
R102	1-216-025-91	METAL GLAZE	100	%	1/10W
R103	1-216-025-91	METAL GLAZE	100	%	1/10W
R104	1-216-073-00	METAL GLAZE	10K	%	1/10W
R105	1-216-059-00	METAL GLAZE	2.7K	%	1/10W

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
R106	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R107	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R108	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R109	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R110	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R113	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R117	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R119	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R124	1-216-295-91	CONDUCTOR, CHIP			
R130	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R132	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R133	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R134	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R135	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R137	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R140	1-216-033-00	METAL GLAZE	220	5%	1/10W
R141	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R144	1-216-295-91	CONDUCTOR, CHIP			
R149	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R151	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R154	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R155	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R157	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R158	1-216-295-91	CONDUCTOR, CHIP			
R159	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R160	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R162	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R163	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R164	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R165	1-216-295-91	CONDUCTOR, CHIP			
R167	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R168	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R169	1-216-107-00	METAL GLAZE	270K	5%	1/10W
R171	1-216-031-00	METAL GLAZE	180	5%	1/10W
R172	1-216-295-91	CONDUCTOR, CHIP			
R177	1-216-214-00	METAL GLAZE	4.7K	5%	1/8W
R181	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R184	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R185	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R187	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R189	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R190	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R192	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R195	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R197	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R199	1-216-295-91	CONDUCTOR, CHIP			
R200	1-216-686-11	METAL CHIP	30K	0.50%	1/10W
R201	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R202	1-212-857-00	FUSIBLE	10	5%	1/4W F
R203	1-260-095-11	CARBON	470	5%	1/2W
R204	1-260-072-11	CARBON	4.7	5%	1/2W
R205	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R206	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R207	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R208	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R209	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R210	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R211	1-249-393-11	CARBON	10	5%	1/4W F
R237	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R301	1-216-025-91	METAL GLAZE	100	5%	1/10W
R302	1-216-025-91	METAL GLAZE	100	5%	1/10W
R303	1-216-025-91	METAL GLAZE	100	5%	1/10W
R304	1-216-025-91	METAL GLAZE	100	5%	1/10W
R305	1-216-295-91	CONDUCTOR, CHIP			
R306	1-216-295-91	CONDUCTOR, CHIP			
R307	1-216-115-00	METAL GLAZE	560K	5%	1/10W
R308	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R311	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R312	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R313	1-216-648-11	METAL CHIP	750	0.50%	1/10W
R314	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R315	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R316	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R317	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R318	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R319	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R320	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R321	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R322	1-216-035-00	METAL GLAZE	270	5%	1/10W
R323	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R324	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R325	1-216-037-00	METAL GLAZE	330	5%	1/10W
R326	1-216-033-00	METAL GLAZE	220	5%	1/10W
R328	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R329	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R330	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R331	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R332	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R333	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R334	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R335	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R336	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R337	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R338	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R339	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R340	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R341	1-216-673-11	METAL CHIP	8.2K	0.50%	1/10W
R342	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R343	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R344	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R345	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R346	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R347	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R348	1-216-031-00	METAL GLAZE	180	5%	1/10W
R349	1-216-694-11	METAL CHIP	62K	0.50%	1/10W
R350	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R351	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R352	1-216-675-11	METAL CHIP	10K	0.50%	1/10W
R353	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R354	1-216-119-00	METAL GLAZE	820K	5%	1/10W
R355	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R356	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R357	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R358	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R359	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R360	1-216-039-00	METAL GLAZE	390	5%	1/10W
R361	1-216-017-91	METAL GLAZE	47	5%	1/10W
R362	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R363	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R364	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R366	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R367	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R368	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R371	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R372	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R373	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R374	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R375	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R376	1-216-111-91	METAL GLAZE	390K	5%	1/10W
R378	1-216-114-00	METAL GLAZE	510K	5%	1/10W
R379	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R380	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R381	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R382	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R383	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R384	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R385	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
R386	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R387	1-216-029-00	METAL GLAZE	150	5%	1/10W
R388	1-216-039-00	METAL GLAZE	390	5%	1/10W
R389	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R390	1-249-393-11	CARBON	10	5%	1/4W F
R391	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R393	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R394	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R395	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R396	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R397	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R398	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R399	1-216-111-91	METAL GLAZE	390K	5%	1/10W
R400	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R401	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R402	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R403	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R404	1-216-029-00	METAL GLAZE	150	5%	1/10W
R405	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R406	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R407	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R408	1-216-689-11	METAL CHIP	39K	0.50%	1/10W
R410	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R411	1-216-033-00	METAL GLAZE	220	5%	1/10W
R412	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R413	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R414	1-216-073-00	METAL GLAZE	10K	5%	1/10W (20M4U/E/A)
R414	1-216-295-91	CONDUCTOR, CHIP (20M2U/E)			
R416	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R417	1-216-665-11	METAL CHIP	3.9K	0.50%	1/10W
R418	1-216-667-11	METAL CHIP	4.7K	0.50%	1/10W
R420	1-216-105-91	METAL GLAZE	220K	5%	1/10W (20M4U/E/A)
R422	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R423	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R424	1-216-033-00	METAL GLAZE	220	5%	1/10W
R425	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R426	1-216-039-00	METAL GLAZE	390	5%	1/10W
R427	1-216-033-00	METAL GLAZE	220	5%	1/10W
R428	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R429	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R430	1-216-119-00	METAL GLAZE	820K	5%	1/10W
R431	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R432	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R434	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R435	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R436	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R437	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R438	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R439	1-216-033-00	METAL GLAZE	220	5%	1/10W
R440	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R441	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R442	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R443	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R444	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R445	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R447	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R448	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R449	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R450	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R451	1-216-037-00	METAL GLAZE	330	5%	1/10W
R452	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R453	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R455	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R456	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R457	1-216-025-91	METAL GLAZE	100	5%	1/10W
R458	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R459	1-216-649-11	METAL CHIP	820	0.50%	1/10W

REF. NO.	PART NO.	DESCRIPTION			REMARK
R460	1-216-295-91	CONDUCTOR, CHIP			
R462	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R463	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R464	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R465	1-216-025-91	METAL GLAZE	100	5%	1/10W
R466	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R467	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R468	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R469	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R470	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R471	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R472	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R473	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R474	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R475	1-216-025-91	METAL GLAZE	100	5%	1/10W
R476	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R477	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R478	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R479	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R480	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R481	1-216-033-00	METAL GLAZE	220	5%	1/10W
R482	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R483	1-216-025-91	METAL GLAZE	100	5%	1/10W
R484	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R485	1-216-033-00	METAL GLAZE	220	5%	1/10W
R486	1-216-681-11	METAL CHIP	18K	0.50%	1/10W
R487	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R488	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R489	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R490	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R491	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R492	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R493	1-216-295-91	CONDUCTOR, CHIP			
R494	1-216-696-11	METAL CHIP	75K	0.50%	1/10W
R495	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R496	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R497	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R498	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R499	1-216-033-00	METAL GLAZE	220	5%	1/10W
R500	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R501	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R502	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R503	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R504	1-216-111-91	METAL GLAZE	390K	5%	1/10W
R505	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R506	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R507	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R508	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R509	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R510	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R511	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R512	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R513	1-216-295-91	CONDUCTOR, CHIP			
R514	1-216-295-91	CONDUCTOR, CHIP			
R515	1-216-675-11	METAL CHIP	10K	0.50%	1/10W
R516	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R517	1-214-896-81	METAL	20K	1%	1/2W
R518	1-260-123-11	CARBON	100K	5%	1/2W
R519	1-216-017-91	METAL GLAZE	47	5%	1/10W
R520	1-249-423-11	CARBON	3.3K	5%	1/4W F
R521	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R523	1-215-892-11	METAL OXIDE	1K	5%	2W F
R524	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R525	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R526	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R527	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R528	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R529	1-216-089-91	METAL GLAZE	47K	5%	1/10W

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
R530	1-216-367-11	METAL OXIDE	0.68	5%	2W F
R531	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R532	1-216-478-11	METAL OXIDE	390	5%	3W F
R533	1-247-723-71	CARBON	6.8K	5%	1/4W F
R534	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R535	1-249-448-11	CARBON	1.2	5%	1/4W F
R536	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R537	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R539	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R540	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R541	1-249-383-11	CARBON	1.5	5%	1/4W F
R542	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R543	1-212-883-00	FUSIBLE	120	5%	1/4W F
R544	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R545	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R546	1-249-425-11	CARBON	4.7K	5%	1/4W F
R547	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R548	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R549	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R550	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R551	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R552	1-216-033-00	METAL GLAZE	220	5%	1/10W
R553	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R554	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R555	1-216-692-11	METAL CHIP	51K	0.50%	1/10W
R556	1-216-463-00	METAL OXIDE	12K	5%	2W F
R558	1-215-868-00	METAL OXIDE	680	5%	1W F
R559	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R560	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R561	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R562	1-247-692-71	CARBON	22	5%	1/4W F (20M2U/E)
R562	1-247-696-11	CARBON	47	5%	1/4W F (20M4U/E/A)
R563	1-216-017-91	METAL GLAZE	47	5%	1/10W
R564	1-216-107-00	METAL GLAZE	270K	5%	1/10W
R565	1-216-033-00	METAL GLAZE	220	5%	1/10W
R566	1-216-685-11	METAL CHIP	27K	0.50%	1/10W (20M2U/E)
R566	1-216-691-11	METAL CHIP	47K	0.50%	1/10W (20M4U/E/A)
R567	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R568	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R569	1-260-119-11	CARBON	47K	5%	1/2W
R571	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R572	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R573	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R574	1-216-089-91	METAL GLAZE	47K	5%	1/10W (20M4U/E/A)
R575	1-249-383-11	CARBON	1.5	5%	1/4W F
R576	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R577	1-216-073-00	METAL GLAZE	10K	5%	1/10W (20M4U/E/A)
R578	1-216-693-11	METAL CHIP	56K	0.50%	1/10W
R580	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R581	1-216-049-91	METAL GLAZE	1K	5%	1/10W (20M4U/E/A)
R582	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R583	1-216-039-00	METAL GLAZE	390	5%	1/10W
R584	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W (20M4U/E/A)
R584	1-216-073-00	METAL GLAZE	10K	5%	1/10W (20M2U/E)
R585	1-216-033-00	METAL GLAZE	220	5%	1/10W
R586	1-216-686-11	METAL CHIP	30K	0.50%	1/10W
R587	1-216-675-11	METAL CHIP	10K	0.50%	1/10W
R588	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R589	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R590	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R591	1-216-683-11	METAL CHIP	22K	0.50%	1/10W
R592	1-247-688-11	CARBON	10	5%	1/4W F
R593	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R594	1-260-104-91	CARBON	2.7K	5%	1/2W
R595	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R596	1-214-754-00	METAL	11K	1%	1/4W
R597	1-249-417-11	CARBON	1K	5%	1/4W F
R598	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R599	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1103	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R1104	1-216-699-11	METAL CHIP	100K	0.50%	1/10W
R1105	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1106	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1107	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R1108	1-216-681-11	METAL CHIP	18K	0.50%	1/10W
R1111	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1112	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1113	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1114	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1115	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1116	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R1117	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R1118	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1119	1-216-694-11	METAL CHIP	62K	0.50%	1/10W
R1120	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1123	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1124	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1125	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1126	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1128	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1129	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1130	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1131	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1132	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1133	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R1134	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1136	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1137	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1138	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1139	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R1140	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R1141	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1142	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R1143	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R1144	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1145	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R1146	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1147	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1150	1-216-037-00	METAL GLAZE	330	5%	1/10W
R1151	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1155	1-216-133-00	METAL GLAZE	3.3M	5%	1/10W
R1161	1-218-776-11	METAL CHIP	1M	0.50%	1/10W
R1162	1-218-768-11	METAL CHIP	470K	0.50%	1/10W
R1163	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1164	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1165	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1167	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1168	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1169	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1170	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1171	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1172	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1173	1-216-295-91	CONDUCTOR, CHIP			
R1174	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1177	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1179	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1180	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1182	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1183	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1184	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
R1185	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1186	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1187	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1188	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1189	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1190	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1191	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1192	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1193	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1194	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1195	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1196	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1197	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1198	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1301	1-216-029-00	METAL GLAZE	150	5%	1/10W
R1302	1-216-029-00	METAL GLAZE	150	5%	1/10W
R1303	1-216-039-00	METAL GLAZE	390	5%	1/10W
R1304	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R1305	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1306	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1307	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R1308	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1309	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1311	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1312	1-216-027-00	METAL GLAZE	120	5%	1/10W
R1313	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1314	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1315	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1316	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1317	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1318	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1319	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1320	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1321	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R1322	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1324	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R1325	1-216-652-11	METAL CHIP	1.1K	0.50%	1/10W
R1326	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1327	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1328	1-216-125-00	METAL GLAZE	1.5M	5%	1/10W
R1329	1-216-103-00	METAL GLAZE	180K	5%	1/10W
R1330	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1331	1-216-679-11	METAL CHIP	15K	0.50%	1/10W
R1332	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W
R1333	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1334	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1335	1-249-401-11	CARBON	47	5%	1/4W F
R1336	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R1337	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R1338	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R1339	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1340	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1341	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1342	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R1343	1-216-037-00	METAL GLAZE	330	5%	1/10W
R1344	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R1345	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R1346	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1347	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1348	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1349	1-216-035-00	METAL GLAZE	270	5%	1/10W
R1350	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1351	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1352	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1353	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1354	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1355	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1356	1-216-105-91	METAL GLAZE	220K	5%	1/10W

REF. NO.	PART NO.	DESCRIPTION			REMARK
R1357	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R1358	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1359	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R1360	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1361	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1362	1-216-676-11	METAL CHIP	11K	0.50%	1/10W
R1363	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1364	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1365	1-216-131-11	METAL GLAZE	2.7M	5%	1/10W
R1366	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1367	1-216-660-11	METAL CHIP	2.4K	0.50%	1/10W
R1368	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R1369	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R1370	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R1371	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1372	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1373	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1374	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R1375	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1376	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R1377	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R1378	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1379	1-216-037-00	METAL GLAZE	330	5%	1/10W
R1380	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1381	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R1382	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1383	1-216-681-11	METAL CHIP	18K	0.50%	1/10W
R1384	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R1385	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1386	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R1387	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R1388	1-216-689-11	METAL CHIP	39K	0.50%	1/10W
R1389	1-216-658-11	METAL CHIP	2K	0.50%	1/10W
R1390	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R1391	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1392	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1393	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1394	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1395	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1396	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1397	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1399	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1401	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1402	1-216-295-91	CONDUCTOR, CHIP			
R1403	1-216-651-11	METAL CHIP	1K	0.50%	1/10W
R1404	1-216-681-11	METAL CHIP	18K	0.50%	1/10W
R1405	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1406	1-216-653-11	METAL CHIP	1.2K	0.50%	1/10W
R1407	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1408	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1409	1-216-295-91	CONDUCTOR, CHIP			
R1410	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R1411	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1412	1-216-107-00	METAL GLAZE	270K	5%	1/10W
R1413	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1414	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1415	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R1416	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1417	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1418	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1419	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1420	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1421	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R1422	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1423	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1424	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1425	1-216-013-00	METAL GLAZE	33	5%	1/10W
R1426	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1427	1-216-681-11	METAL CHIP	18K	0.50%	1/10W

A

• The components identified by ⧓ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION			REMARK
R1428	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R1429	1-216-668-11	METAL CHIP	5.1K	0.50%	1/10W
R1430	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1431	1-216-129-00	METAL GLAZE	2.2M	5%	1/10W
R1432	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1433	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1434	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1435	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R1436	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1437	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R1438	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1439	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R1440	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1441	1-216-033-00	METAL GLAZE	220	5%	1/10W
R1442	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1443	1-216-013-00	METAL GLAZE	33	5%	1/10W
R1444	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1445	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1446	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1447	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1448	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1449	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1450	1-216-129-00	METAL GLAZE	2.2M	5%	1/10W
R1451	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R1452	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1453	1-216-013-00	METAL GLAZE	33	5%	1/10W
R1454	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1455	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1456	1-216-129-00	METAL GLAZE	2.2M	5%	1/10W
R1457	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1458	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1459	1-216-133-00	METAL GLAZE	3.3M	5%	1/10W
R1460	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1461	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1462	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1463	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R1464	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1465	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1466	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R1467	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1468	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R1469	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1470	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R1471	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1472	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R1473	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1475	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R1476	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1477	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1478	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R1480	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1481	1-216-115-00	METAL GLAZE	560K	5%	1/10W
R1482	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1483	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1484	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1485	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R1486	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1487	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R1488	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R1489	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R1490	1-216-035-00	METAL GLAZE	270	5%	1/10W
R1491	1-216-035-00	METAL GLAZE	270	5%	1/10W
R1492	1-216-035-00	METAL GLAZE	270	5%	1/10W
R1493	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R1494	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1495	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1496	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1498	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1499	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W

REF. NO.	PART NO.	DESCRIPTION			REMARK
R1500	1-216-649-11	METAL CHIP	820	0.50%	1/10W
R1501	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1502	1-260-105-11	CARBON	3.3K	5%	1/2W
R1503	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R1504	1-216-686-11	METAL CHIP	30K	0.50%	1/10W
R1505	1-247-688-11	CARBON	10	5%	1/4W F
R1506	1-216-041-00	METAL GLAZE	470	5%	1/10W (20M2U/E)
R1506	1-216-049-91	METAL GLAZE	1K	5%	1/10W (20M4U/E/A)
R1507	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1508	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R1509	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R1510	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R1511	1-216-360-11	METAL OXIDE	8.2	5%	1W F
R1512	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R1513	1-247-752-11	CARBON	1K	5%	1/2W F
R1514	1-247-711-11	CARBON	680	5%	1/4W F
R1515	1-216-350-11	METAL OXIDE	1.2	5%	1W F
R1516	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R1517	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R1518	1-215-867-00	METAL OXIDE	470	5%	1W F
R1519	1-216-355-11	METAL OXIDE	3.3	5%	1W F
R1520	1-216-027-00	METAL GLAZE	120	5%	1/10W
R1521	1-216-029-00	METAL GLAZE	150	5%	1/10W
R1523	1-216-350-11	METAL OXIDE	1.2	5%	1W F
R1524	1-216-427-00	METAL OXIDE	120	5%	1W F
R1525	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R1526	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1527	1-249-413-11	CARBON	470	5%	1/4W F
R1528	1-215-869-11	METAL OXIDE	1K	5%	1W F
R1529	1-202-829-11	SOLID	8.2K	20%	1/2W
R1530	1-216-115-00	METAL GLAZE	560K	5%	1/10W
R1531	1-247-697-11	CARBON	56	5%	1/4W F
R1532	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R1533	1-249-414-11	CARBON	560	5%	1/4W F
R1534	1-216-659-11	METAL CHIP	2.2K	0.50%	1/10W
⧓R1536 ⚠		METAL CHIP			1/10W
R1537	1-249-389-11	CARBON	4.7	5%	1/4W F
R1538	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1539	1-216-097-91	METAL GLAZE	100K	5%	1/10W (20M4U/E/A)
R1540	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R1541	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1542	1-247-692-71	CARBON	22	5%	1/4W F (20M4U/E/A)
R1543	1-216-027-00	METAL GLAZE	120	5%	1/10W
R1547	1-216-393-00	METAL OXIDE	2.2	5%	3W F
R1548	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1549	1-260-094-11	CARBON	390	5%	1/2W
R1550	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R1551	1-249-393-11	CARBON	10	5%	1/4W F
R1552	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R1553	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R1554	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R1555	1-216-295-91	CONDUCTOR, CHIP			
R1556	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R1557	1-218-760-11	METAL CHIP	220K	0.50%	1/10W
R1558	1-249-393-11	CARBON	10	5%	1/4W F
R1559	1-249-393-11	CARBON	10	5%	1/4W F
R1560	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R1564	1-216-645-11	METAL CHIP	560	0.50%	1/10W (20M4U/E/A)
R1567	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R1568	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R1569	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1570	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1571	1-216-103-00	METAL GLAZE	180K	5%	1/10W
R1572	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R1573	1-216-073-00	METAL GLAZE	10K	5%	1/10W

A

REF. NO.	PART NO.	DESCRIPTION			REMARK
R1574	1-216-041-00	METAL GLAZE	470	5%	1/10W
R1575	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1576	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1577	1-216-025-91	METAL GLAZE	100	5%	1/10W
R1578	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R1579	1-216-689-11	METAL CHIP	39K	0.50%	1/10W
R1580	1-216-083-00	METAL GLAZE	27K	5%	1/10W (20M4U/E/A)
R1581	1-208-612-11	METAL OXIDE	10M	5%	1W (20M4U/E/A)
R1582	1-208-610-11	METAL OXIDE	2M	5%	1W (20M4U/E/A)
R1583	1-212-998-00	FUSIBLE	470	5%	1/2W F (20M4U/E/A)
R1584	1-216-674-11	METAL CHIP	9.1K	0.50%	1/10W (20M4U/E/A)
R1585	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W (20M4U/E/A)
R1586	1-216-691-11	METAL CHIP	47K	0.50%	1/10W (20M4U/E/A)
R1587	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W (20M4U/E/A)
R1588	1-216-298-00	METAL GLAZE	2.2	5%	1/10W (20M4U/E/A)
R1589	1-216-386-11	METAL OXIDE	0.56	5%	3W F
R1590	1-216-001-00	METAL GLAZE	10	5%	1/10W (20M4U/E/A)
R1591	1-249-443-11	CARBON	0.47	5%	1/4W F (20M4U/E/A)
R1592	1-247-760-11	CARBON	4.7K	5%	1/2W F (20M4U/E/A)
R1593	1-249-485-11	CARBON	8.2	5%	1/2W F (20M4U/E/A)
R1594	1-216-360-11	METAL OXIDE	8.2	5%	1W F (20M4U/E/A)
R1595	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R1596	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1597	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R1598	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R1599	1-202-830-00	SOLID	10K	20%	1/2W (20M4U/E/A)
R2300	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2301	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2302	1-216-671-11	METAL CHIP	6.8K	0.50%	1/10W
R2303	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2304	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R2305	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R2306	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2307	1-216-033-00	METAL GLAZE	220	5%	1/10W
R2308	1-216-103-00	METAL GLAZE	180K	5%	1/10W
R2309	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2310	1-216-095-00	METAL GLAZE	82K	5%	1/10W
R2311	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2312	1-216-053-00	METAL GLAZE	1.5K	5%	1/10W
R2313	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2314	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R2315	1-216-679-11	METAL CHIP	15K	0.50%	1/10W
R2316	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R2317	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2318	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R2319	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2320	1-216-677-11	METAL CHIP	12K	0.50%	1/10W
R2321	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R2322	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2323	1-216-683-11	METAL CHIP	22K	0.50%	1/10W
R2324	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2325	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2326	1-216-041-00	METAL GLAZE	470	5%	1/10W
R2327	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R2328	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2329	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R2330	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2331	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R2332	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2333	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2334	1-216-041-00	METAL GLAZE	470	5%	1/10W
R2335	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2336	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2337	1-216-037-00	METAL GLAZE	330	5%	1/10W
R2338	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2339	1-216-037-00	METAL GLAZE	330	5%	1/10W
R2340	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2341	1-216-037-00	METAL GLAZE	330	5%	1/10W
R2342	1-216-071-00	METAL GLAZE	8.2K	5%	1/10W
R2343	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R2344	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R2345	1-216-681-11	METAL CHIP	18K	0.50%	1/10W
R2346	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2347	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2348	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2349	1-216-679-11	METAL CHIP	15K	0.50%	1/10W
R2350	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2351	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2352	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R2353	1-216-041-00	METAL GLAZE	470	5%	1/10W
R2354	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2358	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2361	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R2362	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R2363	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2364	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2365	1-216-687-11	METAL CHIP	33K	0.50%	1/10W
R2366	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R2367	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R2368	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R2369	1-216-675-11	METAL CHIP	10K	0.50%	1/10W
R2371	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2372	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R2374	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R2375	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2376	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2377	1-216-033-00	METAL GLAZE	220	5%	1/10W
R2378	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2379	1-216-033-00	METAL GLAZE	220	5%	1/10W
R2380	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2381	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2382	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2383	1-216-033-00	METAL GLAZE	220	5%	1/10W
R2384	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R2385	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2386	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2387	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2388	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2389	1-216-033-00	METAL GLAZE	220	5%	1/10W
R2390	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R2391	1-216-647-11	METAL CHIP	680	0.50%	1/10W
R2392	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2393	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2394	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R2396	1-216-041-00	METAL GLAZE	470	5%	1/10W
R2397	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R2398	1-216-109-00	METAL GLAZE	330K	5%	1/10W
R2399	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2501	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R2502	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R2503	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R2504	1-216-101-00	METAL GLAZE	150K	5%	1/10W
R2505	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R2506	1-216-099-00	METAL GLAZE	120K	5%	1/10W (20M2U/E)
R2506	1-216-101-00	METAL GLAZE	150K	5%	1/10W (20M4U/E/A)

A

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION			REMARK
R2507	1-216-105-91	METAL GLAZE	220K	5%	1/10W (20M2U/E)
R2507	1-216-109-00	METAL GLAZE	330K	5%	1/10W (20M4U/E/A)
R2551	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2552	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R2553	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R2555	1-216-055-00	METAL GLAZE	1.8K	5%	1/10W
R2556	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R2557	1-216-067-00	METAL GLAZE	5.6K	5%	1/10W
R2558	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R2559	1-216-039-00	METAL GLAZE	390	5%	1/10W
R2560	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R2561	1-216-001-00	METAL GLAZE	10	5%	1/10W
R2562	1-216-001-00	METAL GLAZE	10	5%	1/10W
R2563	1-249-421-11	CARBON	2.2K	5%	1/4W
R3301	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3302	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R3303	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R3304	1-216-065-00	METAL GLAZE	4.7K	5%	1/10W
R3305	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R3306	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R3308	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R3309	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3310	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3311	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R3312	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R3317	1-216-675-11	METAL CHIP	10K	0.50%	1/10W
R3320	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R3323	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3333	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R3334	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3335	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R3337	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R3338	1-216-103-00	METAL GLAZE	180K	5%	1/10W
R3339	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3340	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R3344	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R3345	1-216-033-00	METAL GLAZE	220	5%	1/10W
R3346	1-216-025-91	METAL GLAZE	100	5%	1/10W
R3347	1-216-025-91	METAL GLAZE	100	5%	1/10W
R3348	1-216-025-91	METAL GLAZE	100	5%	1/10W
R3349	1-216-025-91	METAL GLAZE	100	5%	1/10W
R3350	1-216-117-00	METAL GLAZE	680K	5%	1/10W
R3351	1-216-115-00	METAL GLAZE	560K	5%	1/10W
R3353	1-216-111-91	METAL GLAZE	390K	5%	1/10W
R3355	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3356	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R3357	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R3358	1-216-051-00	METAL GLAZE	1.2K	5%	1/10W
R3359	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R3360	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3361	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3362	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3363	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3364	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3365	1-216-099-00	METAL GLAZE	120K	5%	1/10W
R3366	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3367	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3368	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R3369	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3376	1-216-081-00	METAL GLAZE	22K	5%	1/10W
R3377	1-216-107-00	METAL GLAZE	270K	5%	1/10W
R3378	1-216-121-91	METAL GLAZE	1M	5%	1/10W
R3379	1-216-107-00	METAL GLAZE	270K	5%	1/10W
R3381	1-216-041-00	METAL GLAZE	470	5%	1/10W
R3382	1-216-645-11	METAL CHIP	560	0.50%	1/10W
R3383	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R3384	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R3385	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R3386	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R3390	1-216-057-00	METAL GLAZE	2.2K	5%	1/10W
R3394	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3395	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3396	1-216-041-00	METAL GLAZE	470	5%	1/10W
R3398	1-216-688-11	METAL CHIP	36K	0.50%	1/10W
R4401	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R4402	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R4404	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R4405	1-216-069-00	METAL GLAZE	6.8K	5%	1/10W
R4407	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R4408	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R4409	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R4410	1-216-059-00	METAL GLAZE	2.7K	5%	1/10W
R4411	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R4412	1-216-113-00	METAL GLAZE	470K	5%	1/10W
R4413	1-216-295-91	CONDUCTOR, CHIP			
R4414	1-216-295-91	CONDUCTOR, CHIP			
R4415	1-216-295-91	CONDUCTOR, CHIP			
R4416	1-216-295-91	CONDUCTOR, CHIP			
		<VARIABLE RESISTOR>			
RV501	1-223-102-00	RES, ADJ, WIREWOUND 120			
		<TRANSFORMER>			
T300	1-406-781-11	COIL			
T500	1-426-668-11	TRANSFORMER, FERRITE (HDT)			
T501	⚠1-453-234-11	TRANSFORMER ASSY, FLYBACK			
T501	*4-058-301-01	RING, SHORT			
T501	7-685-663-79	SCREW +BVTP 4X16 TYPE2 IT-3			
T502	1-413-059-00	TRANSFORMER, FERRITE (DFT)			
T503	1-460-017-11	TRANSFORMER			
		<THERMISTOR>			
TH500	1-807-970-11	THERMISTOR			
		<TEST PIN>			
TP300	*1-535-877-22	CHIP, CHECKER			
TP301	*1-535-877-22	CHIP, CHECKER			
TP305	*1-535-877-22	CHIP, CHECKER			
TP306	*1-535-877-22	CHIP, CHECKER			
TP307	*1-535-877-22	CHIP, CHECKER			
TP311	*1-535-877-22	CHIP, CHECKER			
TP312	*1-535-877-22	CHIP, CHECKER			
TP401	*1-535-877-22	CHIP, CHECKER			
TP402	*1-535-877-22	CHIP, CHECKER			
TP403	*1-535-877-22	CHIP, CHECKER			
TP501	*1-535-877-22	CHIP, CHECKER			
TP502	*1-535-877-22	CHIP, CHECKER			
TP503	*1-535-877-22	CHIP, CHECKER			
TP504	*1-535-877-22	CHIP, CHECKER			
		<CRYSTAL>			
X101	1-579-175-11	VIBRATOR, CERAMIC			
X300	1-577-259-11	VIBRATOR, CRYSTAL			
X300	3-741-396-01	INSULATOR			
X301	1-527-722-00	VIBRATOR, CRYSTAL			
X301	3-741-396-01	INSULATOR			

****

G

REF. NO.	PART NO.	DESCRIPTION				REMARK
	*A-1316-302-A	G BOARD, COMPLETE **********				
	1-533-223-11	HOLDER, FUSE				
	*4-374-846-11	COVER, CAPACITOR, CAP TYPE				
	4-382-854-11	SCREW (M3X10), P, SW (+)				
	7-322-065-19	RUBBER, SILICON RTV (KE490W)				
		<CAPACITOR>				
C602	1-130-711-00	FILM	0.22MF	20%	250V	
C603	1-130-711-00	FILM	0.22MF	20%	250V	
C604	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C605	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C606	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C607	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C608	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C609	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C610	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C611	1-113-924-11	CERAMIC	0.0047MF	20%	250V	
C612	1-137-484-11	FILM	0.47MF	10%	630V	
C613	1-137-484-11	FILM	0.47MF	10%	630V	
C614	1-129-718-00	FILM	0.022MF	10%	630V	
C615	1-136-619-11	FILM	0.0016MF	3%	2KV	
C616	1-107-909-11	ELECT	47MF	20%	35V	
C617	1-107-430-91	CERAMIC	0.0033MF	10%	1KV	
C618	1-107-906-11	ELECT	10MF	20%	50V	
C619	1-107-911-11	ELECT	220MF	20%	50V	
C621	1-117-791-11	ELECT	1000MF	20%	160V	
C622	1-102-038-00	CERAMIC	0.001MF		500V	
C623	1-107-900-51	ELECT	4700MF	20%	35V	
C624	1-102-038-00	CERAMIC	0.001MF		500V	
C625	1-107-900-51	ELECT	4700MF	20%	35V	
C626	1-102-038-00	CERAMIC	0.001MF		500V	
C627	1-107-900-51	ELECT	4700MF	20%	35V	
C628	1-102-038-00	CERAMIC	0.001MF		500V	
C629	1-107-891-11	ELECT	3300MF	20%	25V	
C630	1-126-964-11	ELECT	10MF	20%	50V	
C631	1-136-853-11	FILM	0.56MF	5%	200V	
C632	1-107-492-11	ELECT	47MF	20%	160V	
C633	1-107-885-11	ELECT	3300MF	20%	16V	
C634	1-107-911-11	ELECT	220MF	20%	50V	
C636	1-107-909-11	ELECT	47MF	20%	50V	
C637	1-107-910-11	ELECT	100MF	20%	50V	
C638	1-137-484-11	FILM	0.47MF	10%	630V	
C2601	1-102-038-00	CERAMIC	0.001MF		500V	
		<CONNECTOR>				
CN601	*1-580-689-11	PIN, CONNECTOR (PC BOARD) 4P				
CN602	*1-695-561-11	PIN, CONNECTOR (PC BOARD) 7P				
CN603	*1-508-765-00	PIN, CONNECTOR (5mm PITCH) 3P				
CN605	*1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P				
CN606	*1-564-506-11	PLUG, CONNECTOR 3P				
CN607	*1-564-509-11	PLUG, CONNECTOR 6P				
CN609	1-508-786-00	PIN, CONNECTOR (5mm PITCH) 2P				
		<DIODE>				
D601	8-719-510-53	DIODE D4SB60L				
D605	8-719-979-85	DIODE EGP20G				
D606	8-719-988-55	DIODE RGP15K-6179				
D607	8-719-300-33	DIODE RU-3AM				
D608	8-719-911-19	DIODE 1SS119-25				
D609	8-719-300-33	DIODE RU-3AM				
D610	8-719-029-04	DIODE D5L60				
D612	8-719-045-48	DIODE FML-G12S				
D613	8-719-979-85	DIODE EGP20G				
D614	8-719-045-48	DIODE FML-G12S				
D615	8-719-979-85	DIODE EGP20G				

REF. NO.	PART NO.	DESCRIPTION				REMARK
D616	8-719-054-32	DIODE ERA15-06				
D617	8-719-110-44	DIODE RD16ESB1				
D618	8-719-979-85	DIODE EGP20G				
		<FERRITE BEAD>				
FB601	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB602	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB603	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB604	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB605	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB606	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB607	1-410-396-41	FERRITE BEAD INDUCTOR 0.45UH				
FB608	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
FB609	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
FB610	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
FB611	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
FB612	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
FB613	1-410-397-21	FERRITE BEAD INDUCTOR 1.1UH				
		<IC>				
IC601	4-058-250-01	SHEET, INSULATING				
IC601	8-749-925-03	IC STR-M6524				
IC602	8-749-010-47	IC STR-S3115				
IC603	8-759-701-56	IC NJM78M05FA				
IC604	8-759-231-53	IC TA7805S				
IC605	8-759-231-58	IC TA7812S				
		<COIL>				
L601	1-411-215-11	COIL, CHOKE 200UH				
L1601	1-410-679-31	INDUCTOR 270UH				
L1602	1-421-421-00	COIL, CHOKE				
L2601	1-459-155-00	COIL (WITH CORE) 45UH				
		<PHOTO COUPLER>				
PH601	8-749-923-50	PHOTO COUPLER PC111YS				
		<TRANSISTOR>				
Q601	8-729-140-96	TRANSISTOR 2SD774-34				
Q603	8-729-303-61	TRANSISTOR 2SC3851-G				
		<RESISTOR>				
R601	1-202-719-00	SOLID	1M	2%	1/2W	
R602	1-216-491-11	METAL OXIDE	56K	5%	3W	F
R603	1-216-490-11	METAL OXIDE	39K	5%	3W	F
R604	1-249-418-11	CARBON	1.2K	5%	1/4W	
R605	1-249-415-11	CARBON	680	5%	1/4W	
R606	1-207-642-00	WIREWOUND	0.15	1%	3W	F
R607	1-249-426-11	CARBON	5.6K	5%	1/4W	
R608	1-249-428-11	CARBON	8.2K	5%	1/4W	
R609	1-249-428-11	CARBON	8.2K	5%	1/4W	
R610	1-249-428-11	CARBON	8.2K	5%	1/4W	
R611	1-249-417-11	CARBON	1K	5%	1/4W	F
R612	1-249-404-00	CARBON	82	5%	1/4W	
R613	1-249-419-11	CARBON	1.5K	5%	1/4W	
R614	1-249-385-11	CARBON	2.2	5%	1/4W	F
R615	1-202-727-00	SOLID	4.7M	1%	1/2W	
R617	1-202-933-61	FUSIBLE	0.1	1%	1/2W	F
R618	1-202-933-61	FUSIBLE	0.1	1%	1/2W	F
R619	1-202-933-61	FUSIBLE	0.1	1%	1/2W	F
R620	1-202-933-61	FUSIBLE	0.1	1%	1/2W	F
R621	1-215-877-11	METAL OXIDE	22K	5%	1W	F
R622	1-249-401-11	CARBON	47	5%	1/4W	F
R623	1-249-417-11	CARBON	1K	5%	1/4W	
R626	1-247-895-91	CARBON	470K	5%	1/4W	

G C

REF. NO.	PART NO.	DESCRIPTION				REMARK
R627	1-216-490-11	METAL OXIDE	39K	5%	3W	F
R628	1-216-491-11	METAL OXIDE	56K	5%	3W	F
R629	1-202-727-00	SOLID	4.7M	10%	1/2W	
R630	1-216-490-11	METAL OXIDE	39K	5%	3W	F
R631	1-249-412-11	CARBON	390	5%	1/4W	F
R632	1-249-401-11	CARBON	47	5%	1/4W	F
R1602	1-202-842-11	SOLID	220K	20%	1/2W	
R1603	1-202-842-11	SOLID	220K	20%	1/2W	
		<RELAY>				
RY601	1-515-738-11	RELAY				
		<TRANSFORMER>				
T601	1-426-716-11	TRANSFORMER, LINE FILTER (LFT)				
T602	1-426-716-11	TRANSFORMER, LINE FILTER (LFT)				
T603	1-431-245-11	TRANSFORMER, CONVERTER (SRT)				
		<THERMISTOR>				
THP601	1-808-059-31	THERMISTOR, POSITIVE				
		<TEST PIN>				
TP1601	1-536-354-00	POST PIN				
		<VARISTOR>				
VDR601	1-809-942-71	VARISTOR				
VDR602	1-809-942-71	VARISTOR				

****

* A-1331-628-A	C BOARD, COMPLETE (PVM-20M4U/E/A)				
	**********				
* A-1331-630-A	C BOARD, COMPLETE (PVM-20M2U/E)				
	**********				
7-682-949-01	SCREW +PSW 3X10				
	<CAPACITOR>				
C701	1-102-116-00	CERAMIC	680PF	10%	50V
C702	1-102-116-00	CERAMIC	680PF	10%	50V
C703	1-102-116-00	CERAMIC	680PF	10%	50V
C704	1-102-121-00	CERAMIC	0.0022MF	10%	50V
C705	1-104-665-11	ELECT	100MF	20%	16V
C706	1-102-074-00	CERAMIC	0.001MF	10%	50V
C707	1-162-116-00	CERAMIC	680PF	10%	2KV
C708	1-136-601-11	FILM	0.01MF	10%	630V
C710	1-101-880-00	CERAMIC	47PF	5%	50V
C711	1-101-880-00	CERAMIC	47PF	5%	50V
C712	1-101-880-00	CERAMIC	47PF	5%	50V
C714	1-102-976-00	CERAMIC	180PF	5%	50V
C715	1-102-976-00	CERAMIC	180PF	5%	50V
C716	1-102-976-00	CERAMIC	180PF	5%	50V
C724	1-107-929-11	ELECT	10MF	20%	100V (20M2U/E)
C726	1-107-662-11	ELECT	22MF	20%	250V
C733	1-107-652-11	ELECT	10MF	20%	250V
C734	1-101-888-00	CERAMIC	68PF	5%	50V
C737	1-102-934-00	CERAMIC	1PF	0.25PF	50V
C740	1-162-114-00	CERAMIC	0.0047MF		2KV (20M4U/E/A)
		<CONNECTOR>			
CN701	* 1-564-511-11	PLUG, CONNECTOR 8P			

REF. NO.	PART NO.	DESCRIPTION	REMARK
CN702	* 1-573-964-11	PIN, CONNECTOR (PC BOARD) 6P	
CN703	1-695-915-11	TAB (CONTACT)	
CN704	1-695-915-11	TAB (CONTACT) (20M4U/E/A)	
		<DIODE>	
D701	8-719-911-19	DIODE 1SS119-25	
D702	8-719-911-19	DIODE 1SS119-25	
D703	8-719-911-19	DIODE 1SS119-25	
D704	8-719-911-19	DIODE 1SS119-25	
D705	8-719-911-19	DIODE 1SS119-25	
D706	8-719-911-19	DIODE 1SS119-25	
D707	8-719-901-83	DIODE 1SS83	
D708	8-719-901-83	DIODE 1SS83	
D709	8-719-901-83	DIODE 1SS83	
D713	8-719-901-83	DIODE 1SS83	
D715	8-719-901-83	DIODE 1SS83	
D716	8-719-901-83	DIODE 1SS83	
D717	8-719-901-83	DIODE 1SS83	
		<JACK>	
J701	1-251-116-11	SOCKET, PICTURE TUBE (20M4U/E/A)	
J701	1-540-071-11	SOCKET, PICTURE TUBE (20M2U/E)	
		<COIL>	
L702	1-408-413-00	INDUCTOR 22UH	
L703	1-408-608-31	INDUCTOR 27UH	
L704	1-408-608-31	INDUCTOR 27UH	
L705	1-412-530-31	INDUCTOR 27UH (20M2U/E)	
L705	1-412-532-11	INDUCTOR 39UH (20M4U/E/A)	
L706	1-410-667-31	INDUCTOR 22UH	
		<TRANSISTOR>	
Q701	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q702	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q703	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q704	8-729-200-17	TRANSISTOR 2SA1091-O	
Q705	8-729-200-17	TRANSISTOR 2SA1091-O	
Q706	8-729-200-17	TRANSISTOR 2SA1091-O	
Q710	8-729-200-17	TRANSISTOR 2SA1091-O	
Q711	8-729-200-17	TRANSISTOR 2SA1091-O	
Q712	8-729-200-17	TRANSISTOR 2SA1091-O	
Q713	8-729-255-12	TRANSISTOR 2SC2551-O	
Q714	8-729-255-12	TRANSISTOR 2SC2551-O	
Q715	8-729-255-12	TRANSISTOR 2SC2551-O	
Q716	8-729-255-12	TRANSISTOR 2SC2551-O	
Q717	8-729-255-12	TRANSISTOR 2SC2551-O	
		<RESISTOR>	
R702	1-247-897-11	CARBON 560K 5% 1/4W	
R704	1-215-404-00	METAL 200 1% 1/4W	
R705	1-215-404-00	METAL 200 1% 1/4W	
R706	1-215-404-00	METAL 200 1% 1/4W	
R707	1-249-429-11	CARBON 10K 5% 1/4W	
R708	1-249-429-11	CARBON 10K 5% 1/4W	
R709	1-249-429-11	CARBON 10K 5% 1/4W	
R710	1-215-388-00	METAL 43 1% 1/4W	
R711	1-215-390-00	METAL 51 1% 1/4W	
R712	1-215-388-00	METAL 43 1% 1/4W	
R715	1-202-818-00	SOLID 1K 20% 1/2W	
R716	1-216-486-00	METAL OXIDE 8.2K 5% 3W	F
R717	1-202-818-00	SOLID 1K 20% 1/2W	
R718	1-216-486-00	METAL OXIDE 8.2K 5% 3W	F
R719	1-202-818-00	SOLID 1K 20% 1/2W	
R720	1-216-486-00	METAL OXIDE 8.2K 5% 3W	F
R722	1-202-883-11	SOLID 680K 20% 1/2W	

The componants identified by shading and mark ⚠ are critical for safety.
Replace only with part number specified.

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite.
Ne les remplacer que par une piece portant le numero specifie.

C H J

REF. NO.	PART NO.	DESCRIPTION			REMARK
R723	1-202-838-00	SOLID	100K	20%	1/2W
R724	1-202-842-11	SOLID	220K	20%	1/2W
R725	1-202-838-00	SOLID	100K	20%	1/2W
R726	1-202-846-00	SOLID	470K	20%	1/2W (20M2U/E)
R728	1-202-837-00	SOLID	82K	20%	1/2W (20M2U/E)
R729	1-202-549-00	SOLID	100	20%	1/2W (20M2U/E)
R731	1-247-815-91	CARBON	220	5%	1/4W
R732	1-247-815-91	CARBON	220	5%	1/4W
R733	1-247-815-91	CARBON	220	5%	1/4W
R734	1-249-409-11	CARBON	220	5%	1/4W F
R735	1-249-409-11	CARBON	220	5%	1/4W F
R736	1-249-409-11	CARBON	220	5%	1/4W F
R737	1-247-807-31	CARBON	100	5%	1/4W
R738	1-247-807-31	CARBON	100	5%	1/4W
R739	1-247-807-31	CARBON	100	5%	1/4W
R740	1-249-433-11	CARBON	22K	5%	1/4W F
R741	1-249-433-11	CARBON	22K	5%	1/4W F
R742	1-249-433-11	CARBON	22K	5%	1/4W F
R744	1-247-843-11	CARBON	3.3K	5%	1/4W
R745	1-249-429-11	CARBON	10K	5%	1/4W
R746	1-215-879-11	METAL OXIDE	47K	5%	1W F
R747	1-247-725-11	CARBON	10K	5%	1/4W F
R748	1-249-923-11	CARBON	1K	5%	1/4W F
R749	1-215-902-11	METAL OXIDE	47K	5%	2W F
R751	1-247-887-00	CARBON	220K	5%	1/4W
R752	1-247-887-00	CARBON	220K	5%	1/4W
R753	1-247-887-00	CARBON	220K	5%	1/4W
R754	1-247-863-91	CARBON	22K	5%	1/4W
R755	1-249-434-11	CARBON	27K	5%	1/4W
R756	1-249-440-11	CARBON	82K	5%	1/4W
R760	1-249-400-11	CARBON	39	5%	1/4W F

<VARIABLE RESISTOR>

RV708	1-241-714-11	RES, ADJ, METAL FILM 110M
RV709	1-230-641-11	RES, ADJ, METAL GLAZE 2.2M

<SPARK GAP>

SG701	1-519-422-11	GAP, SPARK (20M4U/E/A)
SG702	1-519-422-11	GAP, SPARK (20M4U/E/A)
SG703	1-519-422-11	GAP, SPARK (20M4U/E/A)
SG704	1-519-422-11	GAP, SPARK (20M4U/E/A)

****

* A-1372-302-A H BOARD, COMPLETE
****

* 4-348-208-00 HOLDER, LED

<CONNECTOR>

CN105	* 1-564-527-11	PLUG, CONNECTOR 12P
CN106	* 1-564-526-11	PLUG, CONNECTOR 11P

<DIODE>

D2102	8-719-920-05	DIODE SLP281C-50
D2103	8-719-812-32	DIODE TLY123
D2104	8-719-991-33	DIODE 1SS133T-77

<RESISTOR>

R2101	1-249-419-11	CARBON	1.5K	5%	1/4W
R2107	1-249-430-11	CARBON	12K	5%	1/4W
R2136	1-249-414-11	CARBON	560	5%	1/4W
R2137	1-249-414-11	CARBON	560	5%	1/4W
R2138	1-249-414-11	CARBON	560	5%	1/4W
R2139	1-249-414-11	CARBON	560	5%	1/4W
R2140	1-249-414-11	CARBON	560	5%	1/4W
R2141	1-249-414-11	CARBON	560	5%	1/4W
R2142	1-249-414-11	CARBON	560	5%	1/4W
R2143	1-249-414-11	CARBON	560	5%	1/4W
R2144	1-249-414-11	CARBON	560	5%	1/4W
R2145	1-249-414-11	CARBON	560	5%	1/4W
R2147	1-215-427-00	METAL	1.8K	1%	1/4W
R2148	1-215-419-00	METAL	820	1%	1/4W
R2149	1-215-414-00	METAL	510	1%	1/4W
R2150	1-215-409-00	METAL	330	1%	1/4W
R2151	1-215-407-00	METAL	270	1%	1/4W
R2152	1-215-404-00	METAL	200	1%	1/4W
R2153	1-215-401-11	METAL	150	1%	1/4W
R2154	1-215-399-00	METAL	120	1%	1/4W
R2155	1-215-397-00	METAL	100	1%	1/4W
R2156	1-215-421-00	METAL	1K	1%	1/4W
R2157	1-215-416-00	METAL	620	1%	1/4W
R2158	1-215-410-00	METAL	360	1%	1/4W
R2159	1-215-405-00	METAL	220	1%	1/4W
R2160	1-215-421-00	METAL	1K	1%	1/4W

<VARIABLE RESISTOR>

RV2101	1-241-238-21	RES, VAR, CARBON 20K
RV2103	1-225-385-11	RES, VAR, CARBON 20K
RV2105	1-225-385-11	RES, VAR, CARBON 20K
RV2109	1-225-385-11	RES, VAR, CARBON 20K
RV2113	1-225-385-11	RES, VAR, CARBON 20K
RV2117	1-241-238-21	RES, VAR, CARBON 20K

<SWITCH>

S2101	1-570-101-41	SWITCH, KEY BOARD
S2102	1-570-101-41	SWITCH, KEY BOARD
S2103	1-570-101-41	SWITCH, KEY BOARD
S2104	1-570-101-41	SWITCH, KEY BOARD
S2105	1-570-101-41	SWITCH, KEY BOARD
S2106	1-570-969-11	SWITCH, KEY BOARD
S2107	1-570-969-11	SWITCH, KEY BOARD
S2108	1-570-101-41	SWITCH, KEY BOARD
S2109	1-570-101-41	SWITCH, KEY BOARD
S2110	1-570-101-41	SWITCH, KEY BOARD
S2111	1-570-101-41	SWITCH, KEY BOARD
S2112	1-570-101-41	SWITCH, KEY BOARD
S2113	1-570-969-11	SWITCH, KEY BOARD
S2114	1-570-969-11	SWITCH, KEY BOARD

****

* A-1388-193-A J BOARD, COMPLETE
****

<CONNECTOR>

CN608	* 1-695-561-11	PIN, CONNECTOR (PC BOARD) 7P

<SWITCH>

S601	⚠ 1-692-921-11	SWITCH, PUSH (A.C. POWER)

****

X S Q

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION			REMARK
	* A-1390-704-A	X BOARD, COMPLETE			
		**********			
		<CONNECTOR>			
CN108	* 1-564-518-11	PLUG, CONNECTOR 3P			
		<DIODE>			
D001	8-719-023-78	DIODE SEL3810DLC05			
D002	8-719-023-78	DIODE SEL3810DLC05			
D003	8-719-023-78	DIODE SEL3810DLC05			
D004	8-719-023-78	DIODE SEL3810DLC05			
**********					
	* A-1390-705-A	S BOARD, COMPLETE			
		**********			
		(PVM-20M2U/20M4U)			
		<CAPACITOR>			
C805	1-102-978-00	CERAMIC	220PF	5%	50V
C806	1-136-165-00	FILM	0.1MF	5%	50V
C807	1-130-477-00	MYLAR	0.0033MF	5%	50V
C810	1-136-165-00	FILM	0.1MF	5%	50V
C811	1-136-165-00	FILM	0.1MF	5%	50V
C812	1-136-495-11	FILM	0.068MF	5%	50V
C813	1-124-261-00	ELECT	10MF	20%	50V
C818	1-136-165-00	FILM	0.1MF	5%	50V
		<CONNECTOR>			
CN801	* 1-573-896-11	SOCKET, CONNECTOR 12P			
		<COIL>			
L801	1-410-470-11	INDUCTOR 10UH			
		<RESISTOR>			
R802	1-249-435-11	CARBON	33K	5%	1/4W
R803	1-247-863-91	CARBON	22K	5%	1/4W
R804	1-215-454-00	METAL	24K	1%	1/4W
R805	1-215-461-00	METAL	47K	1%	1/4W
R808	1-249-417-11	CARBON	1K	5%	1/4W
R812	1-249-417-11	CARBON	1K	5%	1/4W
R813	1-249-417-11	CARBON	1K	5%	1/4W
R815	1-247-843-11	CARBON	3.3K	5%	1/4W
R816	1-249-418-11	CARBON	1.2K	5%	1/4W
R817	1-249-418-11	CARBON	1.2K	5%	1/4W
R818	1-249-418-11	CARBON	1.2K	5%	1/4W
R819	1-249-418-11	CARBON	1.2K	5%	1/4W
R820	1-249-422-11	CARBON	2.7K	5%	1/4W
**********					
	1-537-735-14	TERMINAL BOARD ASSY, I/O (A)			
		**********			
		(Q BOARD)			
	2-990-241-02	HOLDER (A), PLUG			
	3-178-213-21	SCREW +P 3X10			
	7-685-135-19	SCREW +P 2.6X10 TYPE2 SLIT			
		<CAPACITOR>			
C2401	1-163-111-00	CERAMIC CHIP	56PF	5%	50V
C2402	1-104-396-11	ELECT	10MF	20%	16V
C2403	1-104-396-11	ELECT	10MF	20%	16V
C2404	1-104-396-11	ELECT	10MF	20%	16V
C2405	1-124-589-11	ELECT	47MF	20%	16V
C2406	1-104-396-11	ELECT	10MF	20%	16V
C2407	1-104-396-11	ELECT	10MF	20%	16V
C2408	1-104-396-11	ELECT	10MF	20%	16V
C2409	1-124-234-00	ELECT	22MF	20%	16V
C2410	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2411	1-104-396-11	ELECT	10MF	20%	16V
C2412	1-104-396-11	ELECT	10MF	20%	16V
C2413	1-163-117-00	CERAMIC CHIP	100PF	5%	50V
C2414	1-126-301-11	ELECT	1MF	20%	50V
C2415	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2416	1-124-589-11	ELECT	47MF	20%	16V
C2418	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2422	1-124-234-00	ELECT	22MF	20%	16V
C2423	1-124-234-00	ELECT	22MF	20%	16V
C2424	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2425	1-124-589-11	ELECT	47MF	20%	16V
C2426	1-124-589-11	ELECT	47MF	20%	16V
C2427	1-124-234-00	ELECT	22MF	20%	16V
C2428	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2429	1-124-234-00	ELECT	22MF	20%	16V
C2430	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2431	1-124-234-00	ELECT	22MF	20%	16V
C2432	1-124-234-00	ELECT	22MF	20%	16V
C2433	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2434	1-124-463-00	ELECT	0.1MF	20%	50V
C2435	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2436	1-124-234-00	ELECT	22MF	20%	16V
C2437	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2438	1-124-234-00	ELECT	22MF	20%	16V
C2439	1-124-234-00	ELECT	22MF	20%	16V
C2440	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2441	1-124-234-00	ELECT	22MF	20%	16V
C2442	1-124-234-00	ELECT	22MF	20%	16V
C2443	1-124-234-00	ELECT	22MF	20%	16V
C2444	1-124-234-00	ELECT	22MF	20%	16V
C2445	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2446	1-163-033-91	CERAMIC CHIP	0.022MF		50V
C2447	1-124-234-00	ELECT	22MF	20%	16V
C2448	1-124-234-00	ELECT	22MF	20%	16V
C2449	1-124-234-00	ELECT	22MF	20%	16V
C2450	1-124-234-00	ELECT	22MF	20%	16V
C2451	1-124-589-11	ELECT	47MF	20%	16V
C2452	1-124-589-11	ELECT	47MF	20%	16V
C2454	1-126-163-11	ELECT	4.7MF	20%	25V
C2461	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2462	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2463	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2464	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2465	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2466	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2467	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2468	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2469	1-165-319-11	CERAMIC CHIP	0.1MF		50V
C2470	1-165-319-11	CERAMIC CHIP	0.1MF		50V
		<CONNECTOR>			
CN306	1-564-526-11	PLUG, CONNECTOR 11P			
CN307	1-564-522-11	PLUG, CONNECTOR 7P			
CN308	1-564-519-11	PLUG, CONNECTOR 4P			
CN2401 ⚠	1-251-263-11	INLET, AC			
CN2402	1-565-167-12	TERMINAL, (S) (WITH SW) 4P			
CN2403	1-569-578-11	TERMINAL, S (WITH SW)			
CN2404	1-764-872-11	CONNECTOR, MULTI 20P			

REF. NO.	PART NO.	DESCRIPTION	REMARK
		<DIODE>	
D2402	8-719-016-74	DIODE 1SS352	
D2404	8-719-800-76	DIODE 1SS226	
D2405	8-719-800-76	DIODE 1SS226	
D2406	8-719-800-76	DIODE 1SS226	
D2407	8-719-800-76	DIODE 1SS226	
D2408	8-719-800-76	DIODE 1SS226	
D2409	8-719-800-76	DIODE 1SS226	
D2410	8-719-800-76	DIODE 1SS226	
D2411	8-719-800-76	DIODE 1SS226	
D2415	8-719-800-76	DIODE 1SS226	
D2416	8-719-800-76	DIODE 1SS226	
D2417	8-719-800-76	DIODE 1SS226	
D2418	8-719-800-76	DIODE 1SS226	
D2420	8-719-037-53	DIODE RD27SB-T1	
D2421	8-719-037-53	DIODE RD27SB-T1	
D2422	8-719-037-53	DIODE RD27SB-T1	
D2423	8-719-037-53	DIODE RD27SB-T1	
		<IC>	
IC2401	8-759-509-71	IC XRU4021BF-E2	
IC2402	8-759-509-71	IC XRU4021BF-E2	
IC2403	8-759-287-89	IC MM1113XFF	
IC2404	8-759-084-76	IC MM1111XF	
IC2405	8-759-287-89	IC MM1113XFF	
		<JACK>	
J2401	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2402	1-766-738-11	BNC (WITH SW)	
J2403	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2404	1-766-738-11	BNC (WITH SW)	
J2405	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2406	1-766-738-11	BNC (WITH SW)	
J2407	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2408	1-766-738-11	BNC (WITH SW)	
J2409	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2410	1-766-738-11	BNC (WITH SW)	
J2411	1-562-261-71	CONNECTOR, COAXIAL (BNC)	
J2412	1-766-738-11	BNC (WITH SW)	
J2413	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2414	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2415	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2416	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2417	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2418	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2419	1-507-802-41	JACK, PIN (MOUNT TYPE)	
J2420	1-507-802-41	JACK, PIN (MOUNT TYPE)	
		<CHIP CONDUCTOR>	
JR1	1-216-295-91	CONDUCTOR, CHIP	
JR4	1-216-295-91	CONDUCTOR, CHIP	
JR5	1-216-295-91	CONDUCTOR, CHIP	
JR7	1-216-295-91	CONDUCTOR, CHIP	
JR12	1-216-295-91	CONDUCTOR, CHIP	
JR13	1-216-295-91	CONDUCTOR, CHIP	
JR14	1-216-295-91	CONDUCTOR, CHIP	
JR15	1-216-295-91	CONDUCTOR, CHIP	
JR16	1-216-295-91	CONDUCTOR, CHIP	
JR17	1-216-295-91	CONDUCTOR, CHIP	
JR19	1-216-295-91	CONDUCTOR, CHIP	
JR20	1-216-295-91	CONDUCTOR, CHIP	
JR21	1-216-295-91	CONDUCTOR, CHIP	
JR23	1-216-295-91	CONDUCTOR, CHIP	
JR30	1-216-295-91	CONDUCTOR, CHIP	
JR34	1-216-295-91	CONDUCTOR, CHIP	
JR35	1-216-295-91	CONDUCTOR, CHIP	
JR40	1-216-295-91	CONDUCTOR, CHIP	
JR41	1-216-295-91	CONDUCTOR, CHIP	
JR43	1-216-295-91	CONDUCTOR, CHIP	
JR46	1-216-295-91	CONDUCTOR, CHIP	
JR47	1-216-295-91	CONDUCTOR, CHIP	
JR48	1-216-295-91	CONDUCTOR, CHIP	
JR52	1-216-295-91	CONDUCTOR, CHIP	
JR60	1-216-295-91	CONDUCTOR, CHIP	
		<TRANSISTOR>	
Q2401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2402	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2403	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2404	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2405	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2408	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2409	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2410	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2411	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2412	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2414	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2415	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
Q2416	8-729-216-22	TRANSISTOR 2SA1162-G	
Q2417	8-729-120-28	TRANSISTOR 2SC1623-L5L6	
		<RESISTOR>	
R2401	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2402	1-216-043-91	METAL GLAZE 560 5%	1/10W
R2404	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2405	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2406	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2407	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2408	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2409	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2410	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2411	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2412	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2413	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2414	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2415	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2416	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2417	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2418	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2419	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2420	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2421	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2422	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2423	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2424	1-216-089-91	METAL GLAZE 47K 5%	1/10W
R2425	1-216-073-00	METAL GLAZE 10K 5%	1/10W
R2426	1-214-775-00	METAL 82K 1%	1/4W
R2427	1-216-097-91	METAL GLAZE 100K 5%	1/10W
R2428	1-216-105-91	METAL GLAZE 220K 5%	1/10W
R2429	1-216-025-91	METAL GLAZE 100 5%	1/10W
R2430	1-216-115-00	METAL GLAZE 560K 5%	1/10W
R2431	1-216-077-00	METAL GLAZE 15K 5%	1/10W
R2432	1-214-775-00	METAL 82K 1%	1/4W
R2433	1-216-097-91	METAL GLAZE 100K 5%	1/10W
R2434	1-216-105-91	METAL GLAZE 220K 5%	1/10W
R2435	1-216-025-91	METAL GLAZE 100 5%	1/10W
R2436	1-216-115-00	METAL GLAZE 560K 5%	1/10W
R2437	1-216-295-91	CONDUCTOR, CHIP	
R2438	1-216-077-00	METAL GLAZE 15K 5%	1/10W
R2439	1-214-775-00	METAL 82K 1%	1/4W
R2440	1-216-105-91	METAL GLAZE 220K 5%	1/10W
R2441	1-216-097-91	METAL GLAZE 100K 5%	1/10W
R2442	1-216-025-91	METAL GLAZE 100 5%	1/10W
R2443	1-216-115-00	METAL GLAZE 560K 5%	1/10W
R2444	1-216-077-00	METAL GLAZE 15K 5%	1/10W

Q

Les composants identifies par une trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The componants identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

REF. NO.	PART NO.	DESCRIPTION			REMARK
R2446	1-214-775-00	METAL	82K	1%	1/4W
R2447	1-216-105-91	METAL GLAZE	220K	5%	1/10W
R2448	1-216-097-91	METAL GLAZE	100K	5%	1/10W
R2449	1-216-025-91	METAL GLAZE	100	5%	1/10W
R2450	1-216-115-00	METAL GLAZE	560K	5%	1/10W
R2451	1-216-077-00	METAL GLAZE	15K	5%	1/10W
R2452	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R2453	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2455	2-216-113-00	METAL GLAZE	470K	5%	1/10W
R2458	1-216-295-91	CONDUCTOR, CHIP			
R2463	1-216-085-00	METAL GLAZE	33K	5%	1/10W
R2465	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2466	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2467	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R2470	1-214-702-00	METAL	75	1%	1/4W
R2471	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2472	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2473	1-216-037-00	METAL GLAZE	330	5%	1/10W
R2474	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2475	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2476	1-214-702-00	METAL	75	10%	1/4W
R2477	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2478	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2479	1-216-027-00	METAL GLAZE	120	5%	1/10W
R2480	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2481	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2482	1-214-702-00	METAL	75	1%	1/4W
R2483	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2484	1-216-027-00	METAL GLAZE	120	5%	1/10W
R2485	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2486	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2487	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2488	1-214-702-00	METAL	75	1%	1/4W
R2489	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2490	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2491	1-216-027-00	METAL GLAZE	120	5%	1/10W
R2492	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R2493	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R2494	1-214-702-00	METAL	75	1%	1/4W
R2495	1-214-702-00	METAL	75	1%	1/4W
R2496	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R2497	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R2498	1-216-037-00	METAL GLAZE	330	5%	1/10W
R2499	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3400	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3402	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R3404	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R3405	1-216-037-00	METAL GLAZE	330	5%	1/10W
R3406	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3408	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3409	1-214-702-00	METAL	75	1%	1/4W
R3410	1-216-091-00	METAL GLAZE	56K	5%	1/10W
R3411	1-216-063-91	METAL GLAZE	3.9K	5%	1/10W
R3412	1-216-037-00	METAL GLAZE	330	5%	1/10W
R3413	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3414	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3416	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3417	1-216-093-00	METAL GLAZE	68K	5%	1/10W
R3418	1-214-702-00	METAL	75	1%	1/4W
R3419	1-216-037-00	METAL GLAZE	330	5%	1/10W
R3420	1-216-023-00	METAL GLAZE	82	5%	1/10W
R3421	1-216-689-11	METAL GLAZE	39K	5%	1/10W
R3422	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3423	1-216-083-00	METAL GLAZE	27K	5%	1/10W
R3424	1-216-049-91	METAL GLAZE	1K	5%	1/10W
R3425	1-216-061-00	METAL GLAZE	3.3K	5%	1/10W
R3426	1-216-099-00	METAL GLAZE	120	5%	1/10W
R3427	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3428	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3429	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3430	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3431	1-216-089-91	METAL GLAZE	47K	5%	1/10W
R3432	1-216-073-00	METAL GLAZE	10K	5%	1/10W
R3435	1-216-045-91	METAL GLAZE	680	5%	1/10W
R3436	1-216-045-91	METAL GLAZE	680	5%	1/10W
R3437	1-216-045-91	METAL GLAZE	680	5%	1/10W
R3438	1-216-045-91	METAL GLAZE	680	5%	1/10W
R3439	1-216-045-91	METAL GLAZE	680	5%	1/10W

<SWITCH>

S2401	1-570-598-11	SWITCH, DIP

****

MISCELLANEOUS
****

⚠1-223-417-12	RESISTOR ASSY (HIGH-VOLTAGE)	(20M4U/E/A)
⚠1-238-368-11	RESISTOR ASSY, HIGH-VOLTAGE	(20M2U/E)
⚠1-411-657-11	COIL, LANDING CORRECTION	(20M4U/E/A)
⚠1-426-505-11	COIL, DEMAGNETIZATION	
⚠1-451-349-11	DEFLECTION YOKE (Y20FZA) (20M2U/E)	
⚠1-451-456-11	DEFLECTION YOKE (Y20MTA)	(20M4U/E/A)
1-452-032-00	MAGNET,DISK ; 10mmø	
1-452-094-00	MAGNET,ROTATABLE DISK ; 15mmø	
1-544-063-12	SPEAKER	
⚠1-576-231-11	FUSE (H.B.C.) 4A/250V	
⚠1-590-910-11	CORD SET, POWER (20M2E, 20M4E/A)	
1-765-268-11	CORD, CONNECTION	
⚠1-765-718-11	CORD SET, POWER (20M2U/20M4U)	
⚠8-453-003-41	NA3012-M4 (20M4U/E/A)	
⚠8-736-135-05	PICTURE TUBE 20FZ5(DARK) (20M2U/E)	
⚠8-736-379-05	PICTURE TUBE 20MT1 (PVM)(20M2E/A)	
⚠8-736-381-05	PICTURE TUBE 20MT3 (PVM) (20M4U)	

****

ACCESSORIES AND PACKING MATERIALS
****

3-170-078-01	HOLDER (B), PLUG	
3-859-663-12	MANUAL, INSTRUCTION	(20M2E/20M4E only)
3-859-663-22	MANUAL, INSTRUCTION	
*4-043-769-01	CUSHION (UPPER) (ASSY)	
*4-043-770-01	CUSHION (LOWER) (ASSY)	
4-044-040-03	LABEL, TALLY	
*4-058-819-01	INDIVIDUAL CARTON	
*4-381-155-01	BAG, PROTECTION	

Printed by: Schaltungsdienst Lange, Berlin (GERMANY)

Sony Corporation
Image & Sound Communication Company

English
97D24-130-1

9-922-656-01

©1997. 4